
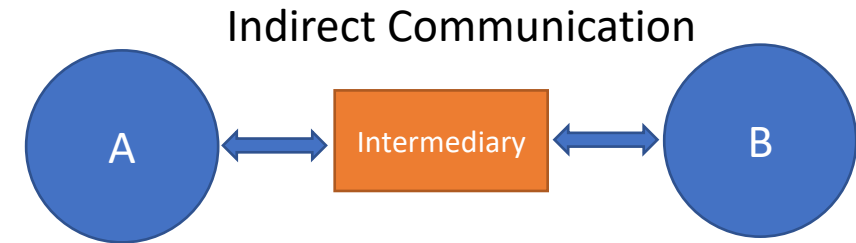


Indirect Messaging

Frank Walsh

Using the “Middleman”

- Communication between processes using an intermediary
 - Sender → “The middle-man” → Receiver
 - No direct coupling
- Up to now, only considered Direct Coupling
 - Introduces a degree of rigidity
- Consider...
 - What happens if a device fails during communication in Direct Coupling?
 - What if you'd like to add
- Two important properties of intermediary in communication
 - **Space uncoupling** (devices don't need to "know" about each other)
 - **Time uncoupling** (devices don't need to be "available" at the same time)

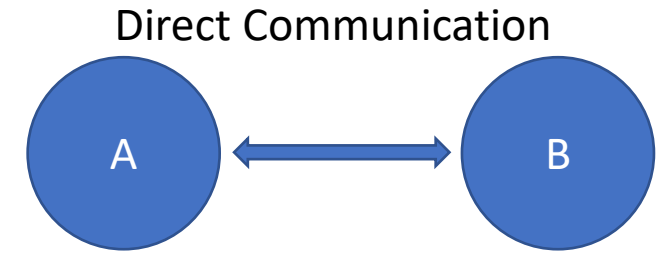




MQTT

- MQ Telemetry Transport (MQTT)
- Telemetry
 - Remote measurements
- Created by IBM
 - from message queueing (MQ) architecture used by IBM for service oriented networks.
 - Telemetry data goes from devices to a server or broker.
 - Uses a **publish/subscribe** mechanism.
- Lightweight both in bandwidth and code footprint

MQTT – publish subscribe

- **Topics/Subscriptions:** Messages are published to topics.
 - Clients can subscribe to a topic or a set of related topics
- **Publish/Subscribe:** Clients can subscribe to topics or publish to topics.

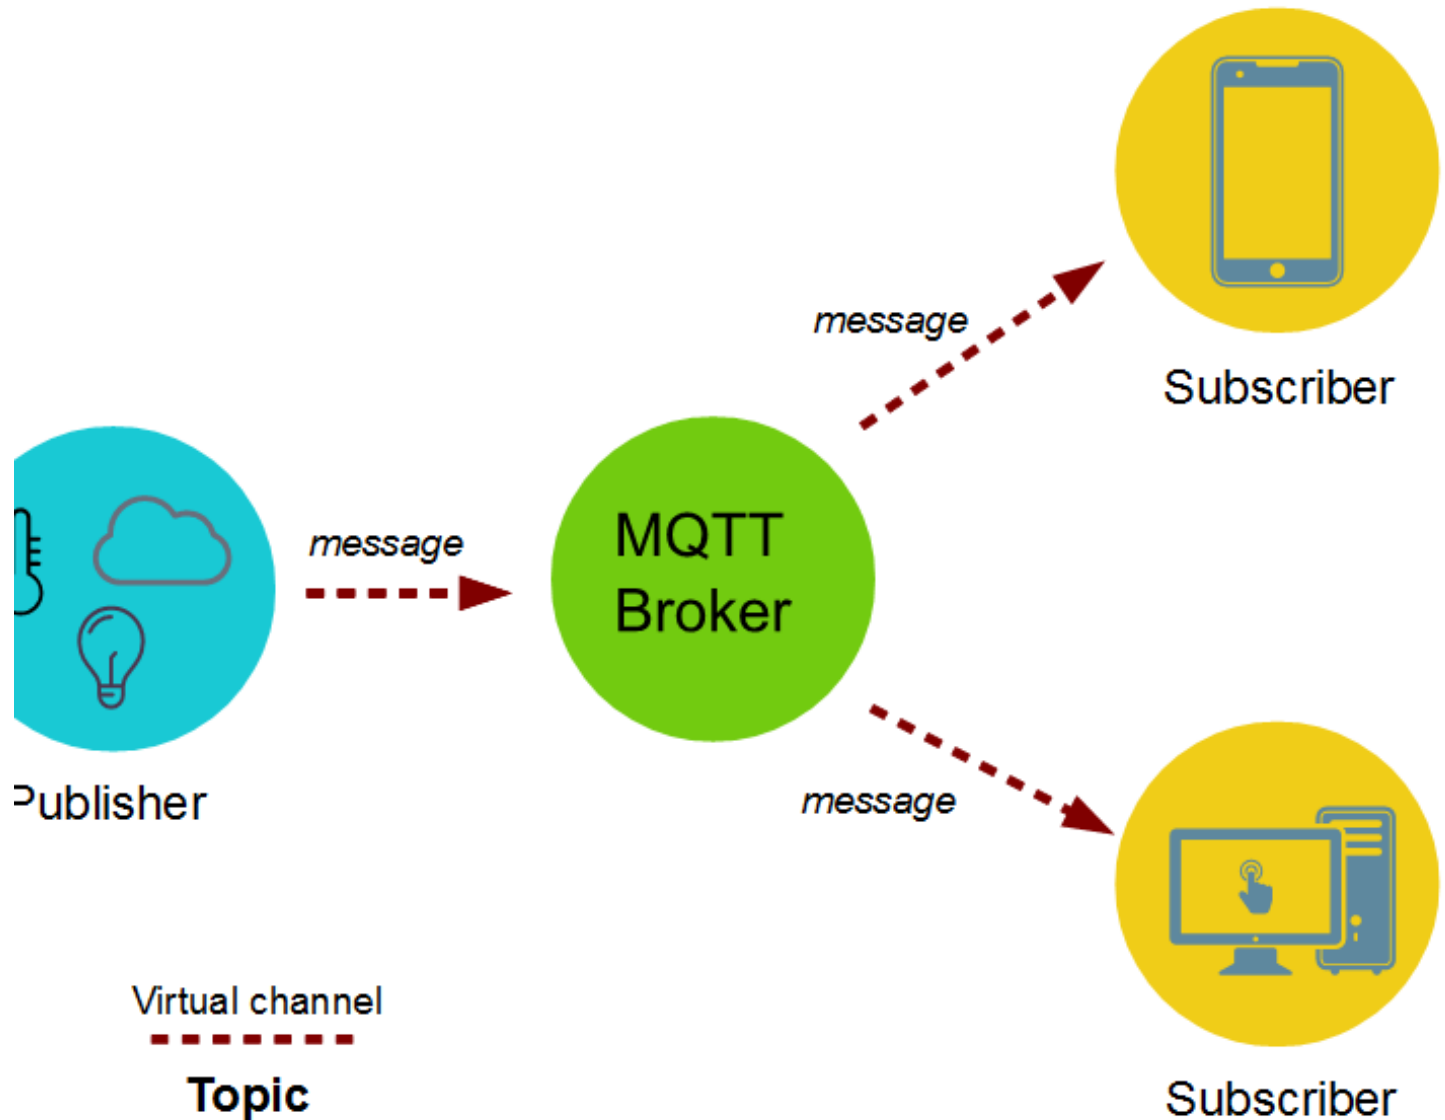


MQTT is Open Source

- Lots of implementations:
 - Mosquitto
 - Micro broker
 - Really small message broker (RSMB): C
 - Cloud broker services



Publish Subscribe Process

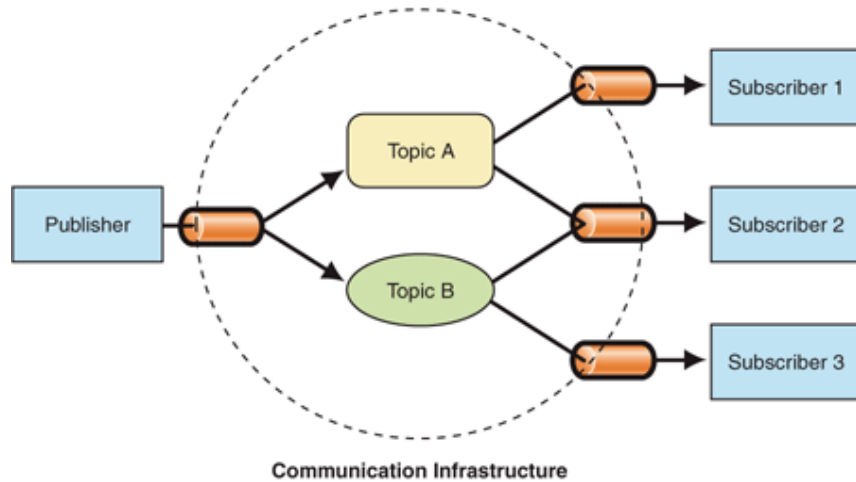

- A message is published once by a publisher.
- Many things can receive the message.
- The messaging service, or “broker”, provides decoupling between the producer and consumer(s)
- A producer sends (publishes) a message (publication) on a topic (subject)
- A consumer subscribes (makes a subscription) for messages on a topic (subject)
- A message server / broker matches publications to subscriptions
 - If no matches the message is discarded
 - If one or more matches the message is delivered to each matching subscriber/consumer

MQTT Topics

- In MQTT, the word topic refers to the string that the broker uses to filter messages for each connected client.




- Note that each topic must contain **at least 1 character** and that the topic string permits empty spaces. **Topics are case-sensitive.**
- Topic Wildcards:



MQTT Characteristics


- MQTT protocol compresses to small number of bytes
 - Smallest packet size 2 bytes
 - Supports always-connected and sometimes connected
 - Provides Session awareness
 - “Last will and testament” enable applications to know when a client goes offline abnormally
 - Typically utilises TCP-based networks.
 - Max size:
 - Theoretical 256MB for MQTT 5.0
 - Configured at broker:
 - **Mosquitto**: Default maximum is 1 MB
 - **AWS IoT**: Limits MQTT messages to 128 KB

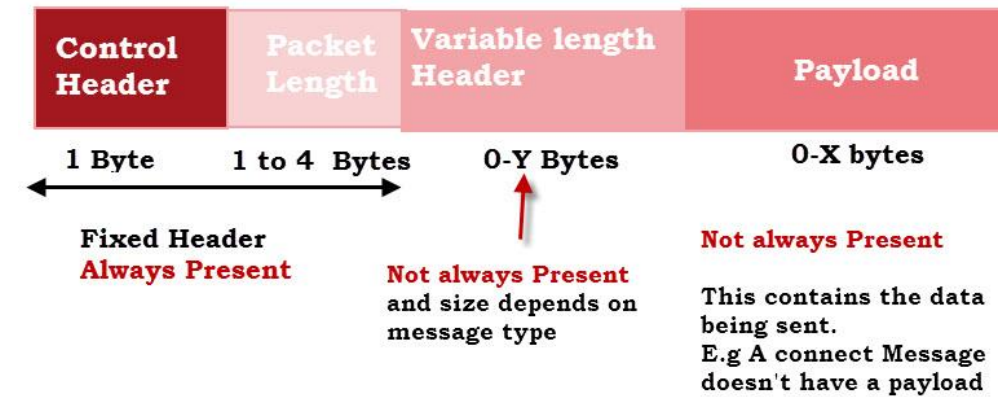

MQTT Standard Packet Structure

MQTT Characteristics


- Three quality of service levels:
 - 0
The message is delivered at most once, without any acknowledgment from the receiver. This means the message is sent, and no retries are attempted if it's lost in transit.
 - 1
The message is delivered at least once, meaning the sender keeps resending the message until it receives an acknowledgment (PUBACK) from the receiver.
 - 2
The message is delivered exactly once through a four-step handshake between sender and receiver (using PUBREC, PUBREL, and PUBCOMP messages to ensure no duplication).

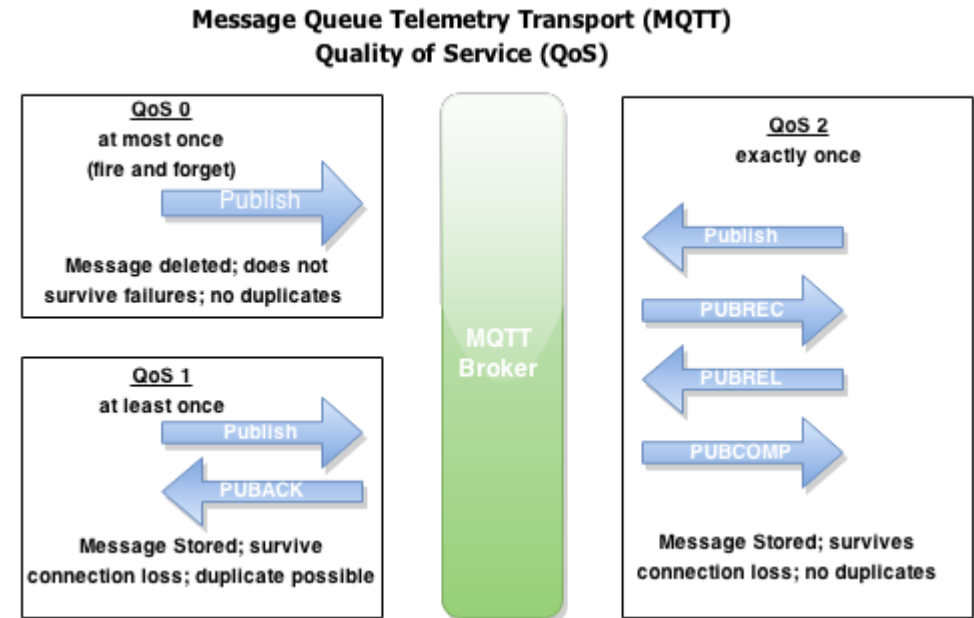

<https://dzone.com/articles/internet-things-mqtt-quality>

MQTT Control Packets

- The MQTT protocol uses MQTT Control Packets using the Control Header.
- Control Packet consists of three parts:
 - *fixed header*(present in all packets),
 - *variable header*(optional)
 - *Payload*(optional)

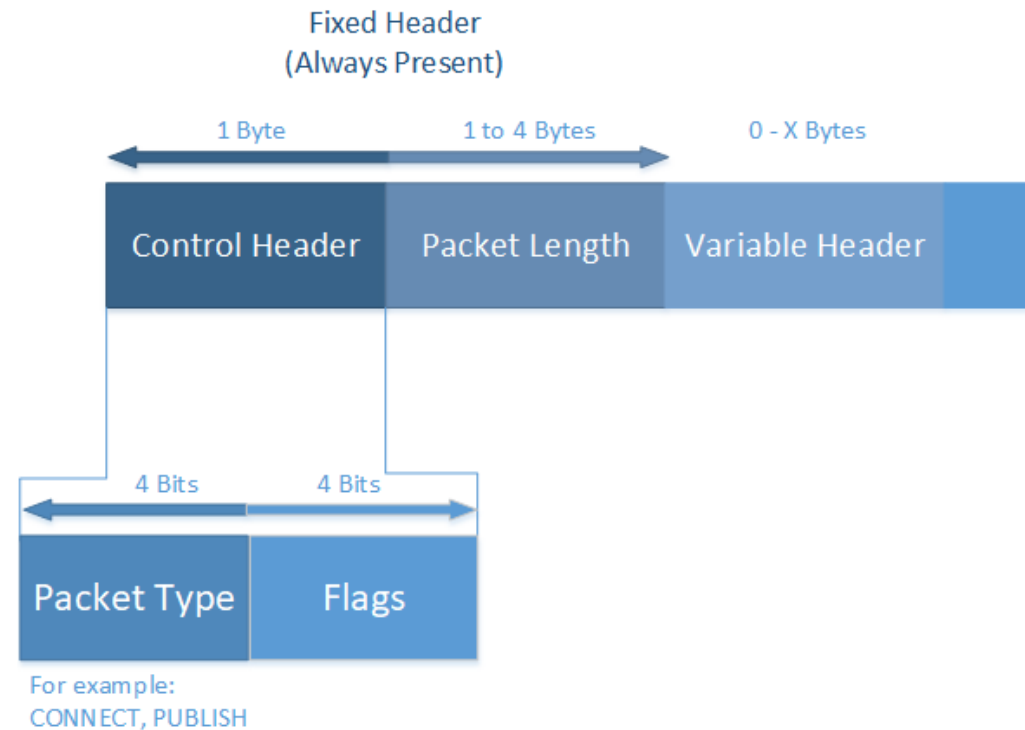


MQTT Control Packets

- MQTT Control Packet Types

Packet Type	Description	Value	Direction of flow
CONNECT	Client requests a connection to a Server	1	Client to Server
CONNACK	Acknowledge connection request	2	Server to Client
PUBLISH	Publish message	3	Client to Server or Server to Client
PUBACK	Publish acknowledgment	4	Client to Server or Server to Client
SUBSCRIBE	Subscribe to topics	8	Client to Server
SUBACK	Subscribe acknowledgment	9	Server to Client
UNSUBSCRIBE	Unsubscribe from topics	10	Client to Server
UNSUBACK	Unsubscribe acknowledgment	11	Server to Client
PINGREQ	Ping request	12	Client to Server
PINGRESP	Ping response	13	Server to Client
DISCONNECT	Disconnect notification	14	Client to Server

Connection

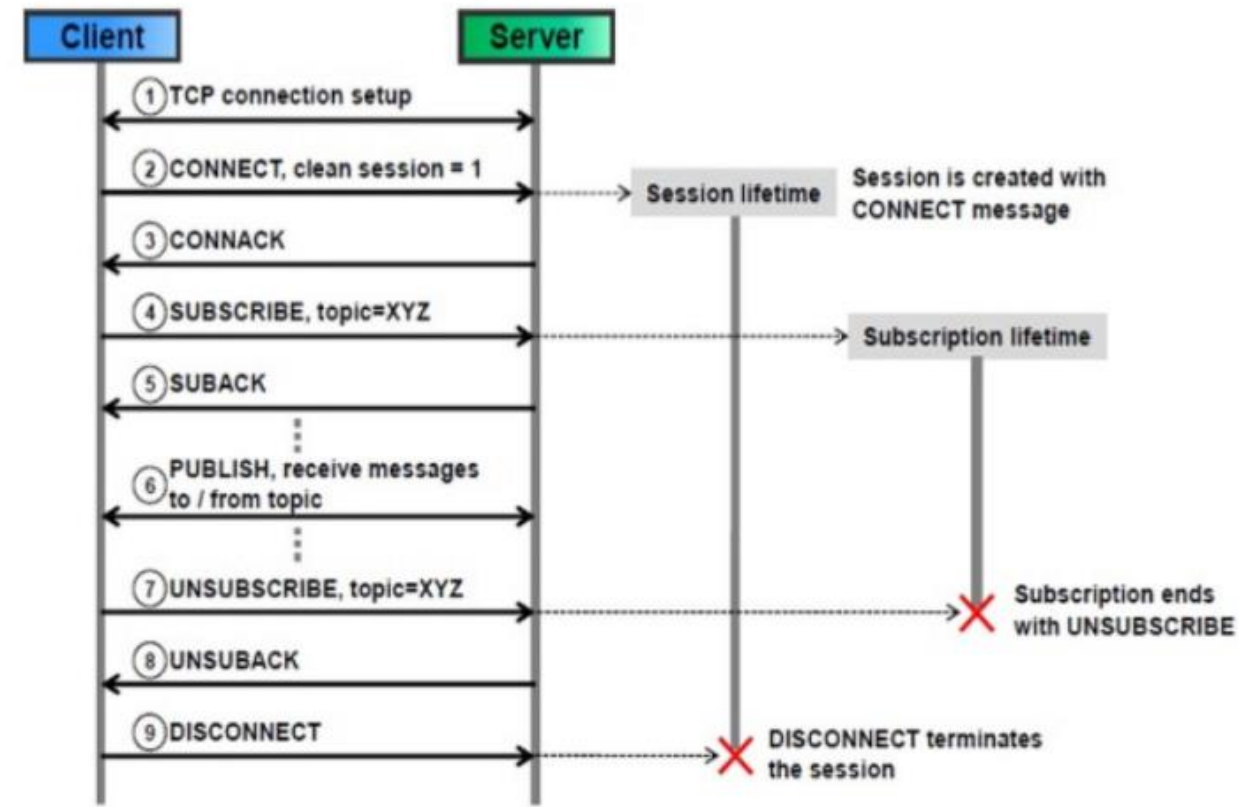

MQTT QoS


QoS 0 : At most once (fire and forget)



QoS 1 : At least once



QoS 2 : Exactly once

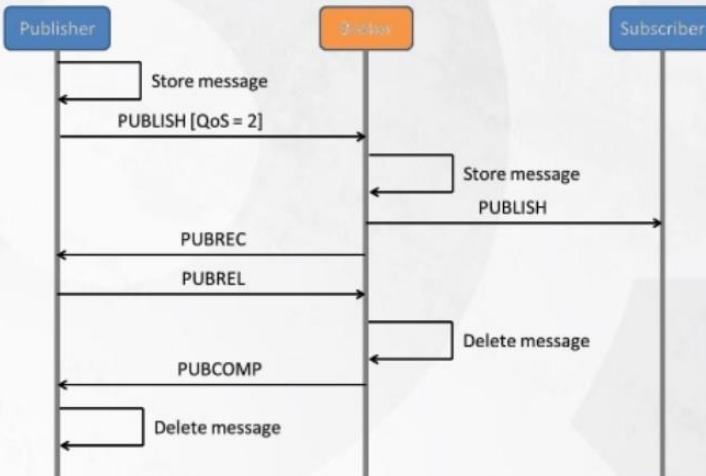

Publish-Subscribe Characteristics

- A published messages may be **retained**
 - Retained messages are used to ensure that when a client subscribes to a topic, it immediately receives the most recent message for that topic
 - A publisher can mark a message as “retained”
 - The broker / server remembers the last known good message of a retained topic
 - The broker / server gives the last known good message to new subscribers
- A Subscription can be **durable**
 - Durable: messages forwarded to subscriber immediately, if subscriber not connected, message is stored and forwarded when connected
 - Non-Durable: subscription only active when subscriber is connected to the server / broker

Feature	Retained Messages	Durable Messages
Storage Scope	Stored on a per-topic basis	Stored per client's subscription (based on QoS and session)
Persistence	Available to any new subscriber	Only queued for offline clients with persistent sessions
Overwrite Behavior	New retained message overwrites previous	No overwrite; messages are queued per client individually
Usage Purpose	Ensures new subscribers receive the latest message	Ensures delivery despite disconnects, based on QoS levels

MQTT Last Will and Testament

- Notify other clients about an ungraceful disconnected client.
- Client can specify its last will message when it connects to a broker.
 - normal MQTT message with a topic, retained message flag, QoS, and payload
 - When an “ungraceful disconnect” occurs, the broker sends the last-will message to all subscribed clients of the last-will message topic.

MQTT-Packet:	
CONNECT	
	
contains:	Example
clientId	"client-1"
cleanSession	true
username (optional)	"hans"
password (optional)	"letmein"
lastWillTopic (optional)	"/hans/will"
lastWillQos (optional)	2
lastWillMessage (optional)	"unexpected exit"
lastWillRetain (optional)	false
keepAlive	60

<https://www.hivemq.com/blog/mqtt-essentials-part-9-last-will-and-testament/>


MQTT vs HTTP

- Push delivery of messages / data / events
 - MQTT – low latency push delivery of messages from client to server and **server to client**. Helps bring an event oriented architecture to the web
 - HTTP – push from client to server but poll from server to client
- Reliable delivery over fragile network
 - MQTT will deliver message to QOS even **across connection breaks**
 - Decoupling and publish subscribe – **one to many delivery**


MQTT vs HTTP

	MQTT	HTTP
Design orientation	Data centric	Document centric
Pattern	Publish/subscribe	Request/response
Complexity	Simple	More complex
Message size	Small, with a compact binary header just two bytes in size	Larger, partly because status detail is text-based
Service levels	Three quality of service settings	All messages get the same level of service
Extra libraries	Libraries for C (30 KB) and Java (100 KB)	Depends on the application (JSON, XML), but typically not small
Data distribution	Supports 1 to zero, 1 to 1, and 1 to n	1 to 1 only


Application Example

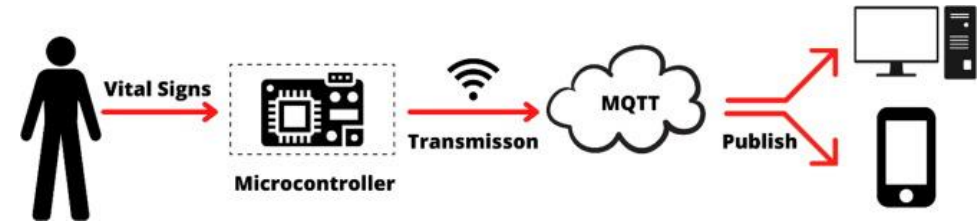

- Home care monitoring solution
 - Home and patient instrumented with sensors.
 - E.g. door motion, blood pressure, pacemaker/defib.
 - Collected by monitoring service (broker) using MQTT
 - Subscribed by a health care service in the hospital
 - Alerts relations/health care profs. if anything is out-of-order

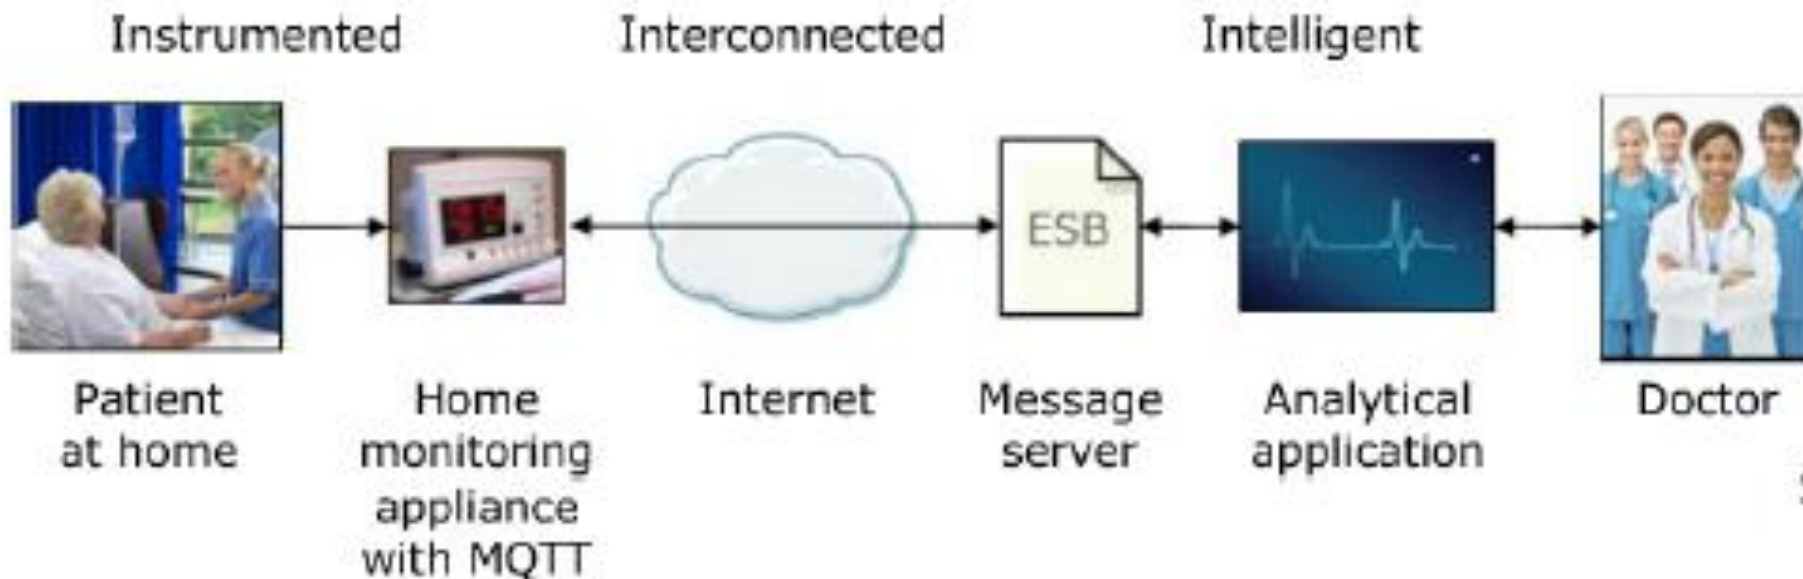

Source: Lampkin 2012

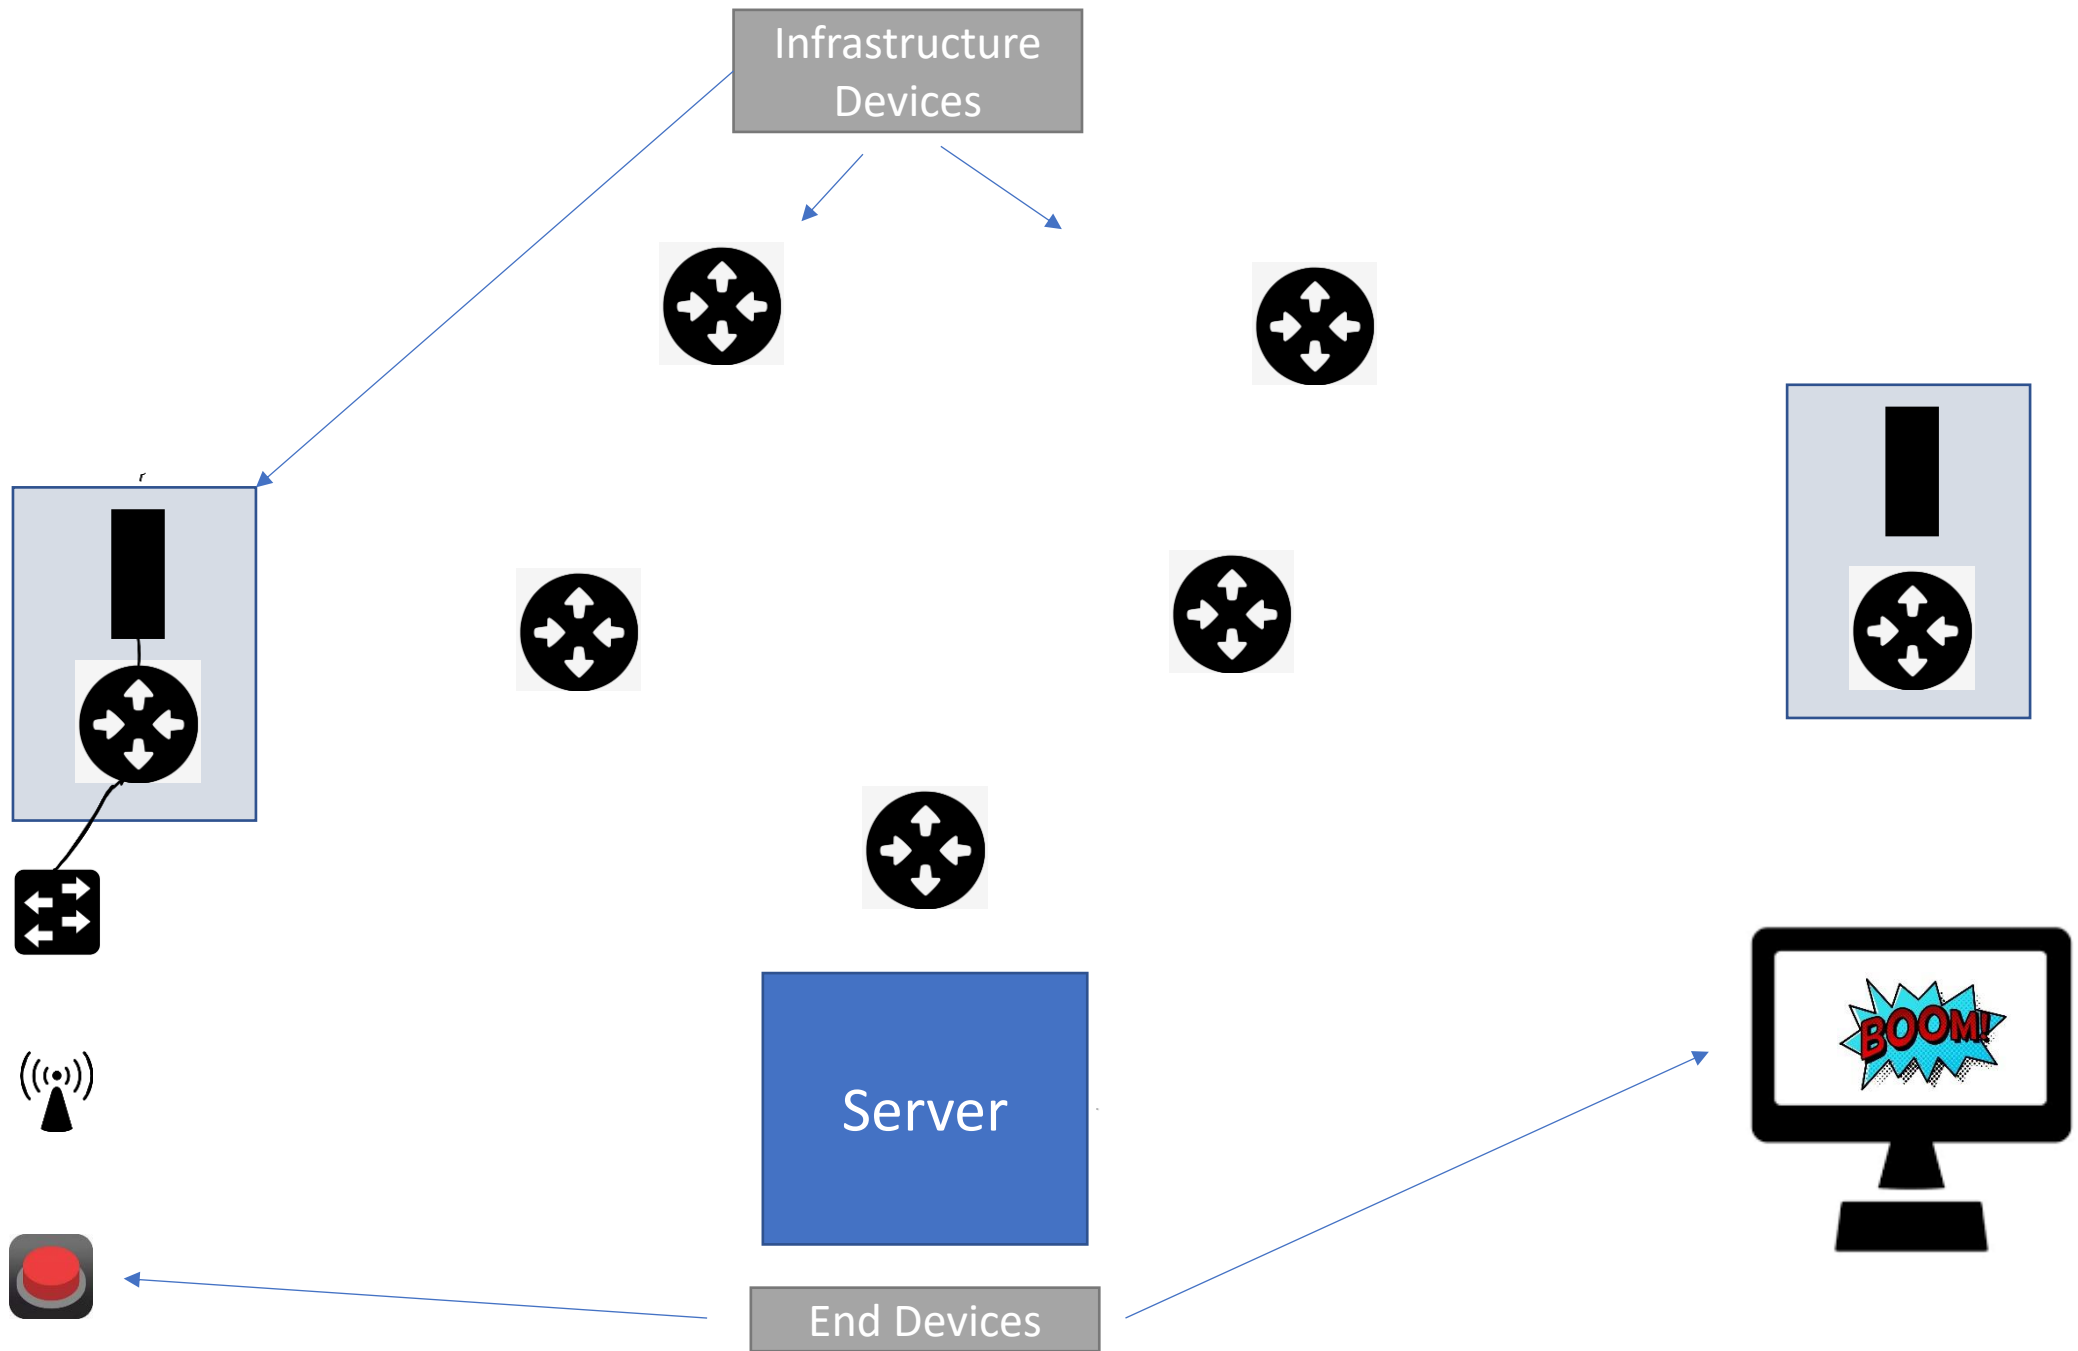

Demo

