



Bootstrap

Build responsive, mobile-first projects on the web with the world's most popular front-end component library. Bootstrap is an open source toolkit for developing with HTML, CSS, and JS.

Showing 5,647,189 available repository results ⓘ

Sort: Most stars ▼

freeCodeCamp/freeCodeCamp

The <https://www.freeCodeCamp.org> open source codebase and curriculum. Learn to code for free together with millions o...

certification

curriculum

react

nodejs

BSD-3-Clause license Updated an hour ago 40 issues need help

twbs/bootstrap

The most popular HTML, CSS, and JavaScript framework for developing responsive, mobile first projects on the web.

html


bootstrap

css

javascript

MIT license Updated 2 hours ago 18 issues need help

vuejs/vue

 Vue.js is a progressive, incrementally-adoptable JavaScript framework for building UI on the web.

javascript

vue

framework

frontend

MIT license Updated an hour ago 1 issue needs help

tensorflow/tensorflow

An Open Source Machine Learning Framework for Everyone

tensorflow

python

machine-learning

Apache-2.0 license Updated 2 hours ago

Bootstrap

Build responsive, mobile-first projects on the web with the world’s **most popular front-end component library**. Bootstrap is an open source toolkit for developing with HTML, CSS, and JS.

무엇을 만들 수 있는지 봅시다.

Quick start

Quick start

CDN 활용을 통해 Bootstrap에 작성된 CSS, JS를 활용하자!

Quick start

Looking to quickly add Bootstrap to your project? Use BootstrapCDN, provided for free by the folks at StackPath. Using a package manager or need to download the source files? [Head to the downloads page](#).

CSS

Copy-paste the stylesheet `<link>` into your `<head>` before all other stylesheets to load our CSS.

```
<link rel="stylesheet" href="https://stackpath.bootstrapcdn.com/bootstrap/4.2.1/css/bootstrap.min.css" integrity="sha384-GJzZqFGwb1QTTN6wy5" data-bbox="184 571 803 601">
```

JS

Many of our components require the use of JavaScript to function. Specifically, they require [jQuery](#), [Popper.js](#), and our own JavaScript plugins. Place the following `<script>`s near the end of your pages, right before the closing `</body>` tag, to enable them. jQuery must come first, then Popper.js, and then our JavaScript plugins.

We use [jQuery's slim build](#), but the full version is also supported.

```
<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js" integrity="sha384-q8i/X+965Dz00rT7abK41JStQIAqVgRVzpbzo5smXKp4YfRvH+8abtTE1F" data-bbox="184 813 803 882"><script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.6/umd/popper.min.js" integrity="sha384-wHAiFfRlMFy6i5SRaxvf0CifBUQy1xHdJ" data-bbox="184 813 803 882"><script src="https://stackpath.bootstrapcdn.com/bootstrap/4.2.1/js/bootstrap.min.js" integrity="sha384-B0UglyR+jN6CkvvIC0B2joaf5I4l3gm9GU6H" data-bbox="184 813 803 882">
```

Curious which components explicitly require jQuery, our JS, and Popper.js? Click the show components link below. If you're at all unsure about the general page structure, keep reading for an example page template.

Our `bootstrap.bundle.js` and `bootstrap.bundle.min.js` include [Popper](#), but not [jQuery](#). For more information about what's included

Quick start

CDN 활용을 통해 Bootstrap에 작성된 CSS, JS를 활용하자!

Content Delivery(Distribution) Network

컨텐츠(CSS, JS, Image, Text 등)를 효율적으로 전달하기 위해
여러 노드에 가진 네트워크에 데이터를 제공하는 시스템.

개별 end-user의 가까운 서버를 통해 빠르게 전달 가능(지리적 이점)
외부 서버를 활용함으로써 본인 서버의 부하가 적어짐.

CDN은 보통 적절한 수준의 캐시 설정으로 빠르게 로딩할 수 있음.

시작하기 전에,



h1. Non Bootstrap heading

h2. Non Bootstrap heading

h3. Non Bootstrap heading

h4. Non Bootstrap heading

h5. Non Bootstrap heading

h6. Non Bootstrap heading



h1. Bootstrap heading

h2. Bootstrap heading

h3. Bootstrap heading

h4. Bootstrap heading

h5. Bootstrap heading

h6. Bootstrap heading



You can use the mark tag to highlight text.

~~This line of text is meant to be treated as deleted text.~~

~~This line of text is meant to be treated as no longer accurate.~~

This line of text is meant to be treated as an addition to the document.

This line of text will render as underlined

This line of text is meant to be treated as fine print.

This line rendered as bold text.

This line rendered as italicized text.



You can use the mark tag to highlight text.

~~This line of text is meant to be treated as deleted text.~~

~~This line of text is meant to be treated as no longer accurate.~~

This line of text is meant to be treated as an addition to the document.

This line of text will render as underlined

This line of text is meant to be treated as fine print.

This line rendered as bold text.

This line rendered as italicized text.

```
<p>You can use the mark tag to <mark>highlight</mark> text.</p>
<p><del>This line of text is meant to be treated as deleted text.</del></p>
<p><s>This line of text is meant to be treated as no longer accurate.</s></p>
<p><ins>This line of text is meant to be treated as an addition to the document.</ins></p>
<p><u>This line of text will render as underlined</u></p>
<p><small>This line of text is meant to be treated as fine print.</small></p>
<p><strong>This line rendered as bold text.</strong></p>
<p><em>This line rendered as italicized text.</em></p>
```

같은 듯 다른 Bootstrap!

1. Utilities

어제 CSS짜느라 고생한 우리, 편하게 클래스로 적용시켜보자!

1.1 Spacing

편-안하게 공간 확보하자.

1-1. Spacing

.m-0?

1-1. Spacing

```
.m-0 {  
  margin: 0 !important;  
}
```

margin: **0**!

1-1. Spacing

.mr-0?

1-1. Spacing

```
.mr-0 {  
  margin-right: 0 !important;  
}
```

margin-**r**ight: **0!**

1-1. Spacing

.mx-0?

1-1. Spacing

```
.mr-0,  
.mx-0 {  
  margin-right: 0 !important;  
}
```

```
.ml-0,  
.mx-0 {  
  margin-left: 0 !important;  
}
```

margin-left: 0!
margin-right: 0!

1-1. Spacing

.py-0?

1-1. Spacing

padding-**top**: **0!**
padding-**bottom**: **0!**

```
.pt-0,  
.py-0 {  
| padding-top: 0 !important;  
}  
  
.pr-0,  
.px-0 {  
| padding-right: 0 !important;  
}  
  
.pb-0,  
.py-0 {  
| padding-bottom: 0 !important;  
}
```

1-1. Spacing


.mt-1?

1-1. Spacing

```
.mt-1,  
.my-1 {  
  margin-top: 0.25rem !important;  
}
```

margin-top: 0.25rem?

1-1. Spacing

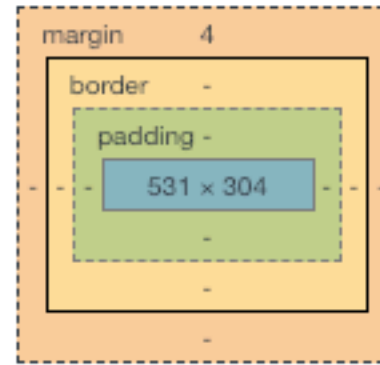

Filter	<input type="checkbox"/> Show all
▶ box-sizing	border-box
▶ color	■ rgb(33, 37, 41)
▶ display	block
▶ font-family	-apple-system, system-ui, "Segoe UI", Roboto, "He...
▶ font-size	16px
▶ font-weight	400
height	304px
▶ line-height	24px
▶ margin-top	4px
▶ text-align	left
▶ text-size-adjust	100%
width	531px
▶ -webkit-tap-highlight-color	■ rgba(0, 0, 0, 0)

margin-top: 4px!

spacer(1rem) * 0.25

16px * 0.25

4px!

*브라우저 기본 rem은 16px

1-1. Spacing

mt-2?

mt-3?

mt-4?

mt-5?

1-1. Spacing

mt-2?	0.5?	8px!
mt-3?	1?	16px!
mt-4?	1.5?	24px!
mt-5?	3?	48px!

1-1. Spacing

정리해보자.

.py-0

m margin p padding	t top	0 0 0px
	b bottom	1 0.25 4px
	l left	2 0.5 8px
	r right	3 1 16px
	x left, right	4 1.5 24px
	y top, bottom	5 3 48px

1-1. Spacing

음수도 가능합니다!

.my-n0

m	margin	t	top	0	0	0px
		b	bottom	n1	-0.25	-4px
		l	left	n2	-0.5	-8px
		r	right	n3	-1	-16px
		x	left, right	n4	-1.5	-24px
		y	top, bottom	n5	-3	-48px

1-1. Spacing

.mx-auto

까지 포함해서 활용하러 고고!

1.2. Color

더이상 눈 아픈 파란색은 Never

1-2. Color



1-2. Color



1-2. Color



```
primary: #007bff;  
secondary: #6c757d;  
success: #28a745;  
info: #17a2b8;  
warning: #ffc107;  
danger: #dc3545;  
light: #f8f9fa;  
dark: #343a40;
```

1-2. Color

background-color: primary

느낌으로 맞춰보자!

1-2. Color

`.bg-primary`

`.bg-secondary`

`.bg-success`

`.bg-danger`

`.bg-warning`

`.bg-info`

`.bg-light`

`.bg-dark`

`.bg-white`

`.bg-transparent`

1-2. Color

활용법

.bg-primary

1-2. Color

color: success

느낌으로 맞춰보자!

1-2. Color

활용법

.text-success

1-2. Color

A simple primary alert—check it out!

A simple secondary alert—check it out!

A simple success alert—check it out!

A simple danger alert—check it out!

A simple warning alert—check it out!

A simple info alert—check it out!

A simple light alert—check it out!

A simple dark alert—check it out!

활용법

.alert-warning

1-2. Color



활용법

.btn-secondary

1-2. Color

Navbar

Home

Features

Pricing

About

Search

Search

활용법

.navbar-dark .bg-primary

1-2. Color

여기저기에서 써보자!

1.3. border

Spacing을 활용하면 Box model 설정이 끝-

1-3. Border

```
.border {  
| border: 1px solid #dee2e6 !important;  
|}  
  
.border-top {  
| border-top: 1px solid #dee2e6 !important;  
|}  
  
.border-right {  
| border-right: 1px solid #dee2e6 !important;  
|}  
  
.border-bottom {  
| border-bottom: 1px solid #dee2e6 !important;  
|}  
  
.border-left {  
| border-left: 1px solid #dee2e6 !important;  
|}
```

.border

1-3. Border

border-color: success

느낌으로 맞춰보자!

1-3. Border

색상과 조합도 가능합니다!

.border .border-primary

1-3. Border

남은게 뭐지?

1-3. Border

radius!

```
.rounded {  
  border-radius: 0.25rem !important;  
}  
  
.rounded-top {  
  border-top-left-radius: 0.25rem !important;  
  border-top-right-radius: 0.25rem !important;  
}  
  
.rounded-right {  
  border-top-right-radius: 0.25rem !important;  
  border-bottom-right-radius: 0.25rem !important;  
}  
  
.rounded-bottom {  
  border-bottom-right-radius: 0.25rem !important;  
  border-bottom-left-radius: 0.25rem !important;  
}  
  
.rounded-left {  
  border-top-left-radius: 0.25rem !important;  
  border-bottom-left-radius: 0.25rem !important;  
}
```

.rounded-

1-3. Border

rounded-circle

rounded-pill

1.4. display

Box model...display까지?

1-4. Display

display: block

느낌으로 맞춰보자!

1-4. Display

.d-block

1-4. Display

.d-inline

1-4. Display

.d-none

1-4. Display

```
.d-none {  
| display: none !important;  
}  
  
.d-inline {  
| display: inline !important;  
}  
  
.d-inline-block {  
| display: inline-block !important;  
}  
  
.d-block {  
| display: block !important;  
}  
  
.d-table {  
| display: table !important;  
}
```

1-4. Display

반응형 맛보기?!

.d-sm-none

1-4. Display

	Extra small <576px	Small ≥576px	Medium ≥768px	Large ≥992px	Extra large ≥1200px
Max container width	None (auto)	540px	720px	960px	1140px
Class prefix		sm	md	lg	xl

* break point들은 앞으로 여기저기서 사용될 겁니다!

Screen Size	Class
Hidden on all	.d-none
Hidden only on xs	.d-none .d-sm-block
Hidden only on sm	.d-sm-none .d-md-block
Hidden only on md	.d-md-none .d-lg-block
Hidden only on lg	.d-lg-none .d-xl-block
Hidden only on xl	.d-xl-none
Visible on all	.d-block
Visible only on xs	.d-block .d-sm-none
Visible only on sm	.d-none .d-sm-block .d-md-none
Visible only on md	.d-none .d-md-block .d-lg-none
Visible only on lg	.d-none .d-lg-block .d-xl-none
Visible only on xl	.d-none .d-xl-block

1.5. position

Box model...위치까지?

1-5. Position

position: static

느낌으로 맞춰보자!

1-5. Position

.position-static

1-5. Position

```
.position-static {  
|   position: static !important;  
}  
  
.position-relative {  
|   position: relative !important;  
}  
  
.position-absolute {  
|   position: absolute !important;  
}  
  
.position-fixed {  
|   position: fixed !important;  
}
```


1-5. Position



```
.fixed-top {  
  position: fixed;  
  top: 0;  
  right: 0;  
  left: 0;  
  z-index: 1030;  
}  
  
.fixed-bottom {  
  position: fixed;  
  right: 0;  
  bottom: 0;  
  left: 0;  
  z-index: 1030;  
}
```

직접 적용하러 고고!

1.6. Text

글자변경도 자유롭게!

1-6. Text

`text-align: center`

느낌으로 맞춰보자!

1-6. Text

```
.text-left {  
| text-align: left !important;  
}  
  
.text-right {  
| text-align: right !important;  
}  
  
.text-center {  
| text-align: center !important;  
}
```

.text-center

1-6. Text

font-weight: bold

느낌으로 맞춰보자!

1-6. Text

```
.font-weight-light {  
  font-weight: 300 !important;  
}  
  
.font-weight-lighter {  
  font-weight: lighter !important;  
}  
  
.font-weight-normal {  
  font-weight: 400 !important;  
}  
  
.font-weight-bold {  
  font-weight: 700 !important;  
}  
  
.font-weight-bolder {  
  font-weight: bolder !important;  
}  
  
.font-italic {  
  font-style: italic !important;  
}
```

.font-weight-bold

컴포넌트는 공식문서로 확인

앞으로도 많이 활용할 것이고, 직접 들어가서 코드를 찾아야하기 때문!

색깔이랑 breakpoint는 component에서도 많이 쓰일 예정이니 다시 확인해보자!

	Extra small <576px	Small ≥576px	Medium ≥768px	Large ≥992px	Extra large ≥1200px
Max container width	None (auto)	540px	720px	960px	1140px
Class prefix		sm	md	lg	xl

.bg-primary

.bg-secondary

.bg-success

.bg-danger

.bg-warning

.bg-info

.bg-light


.bg-dark

.bg-white

.bg-transparent

2. Grid System

12 Columns

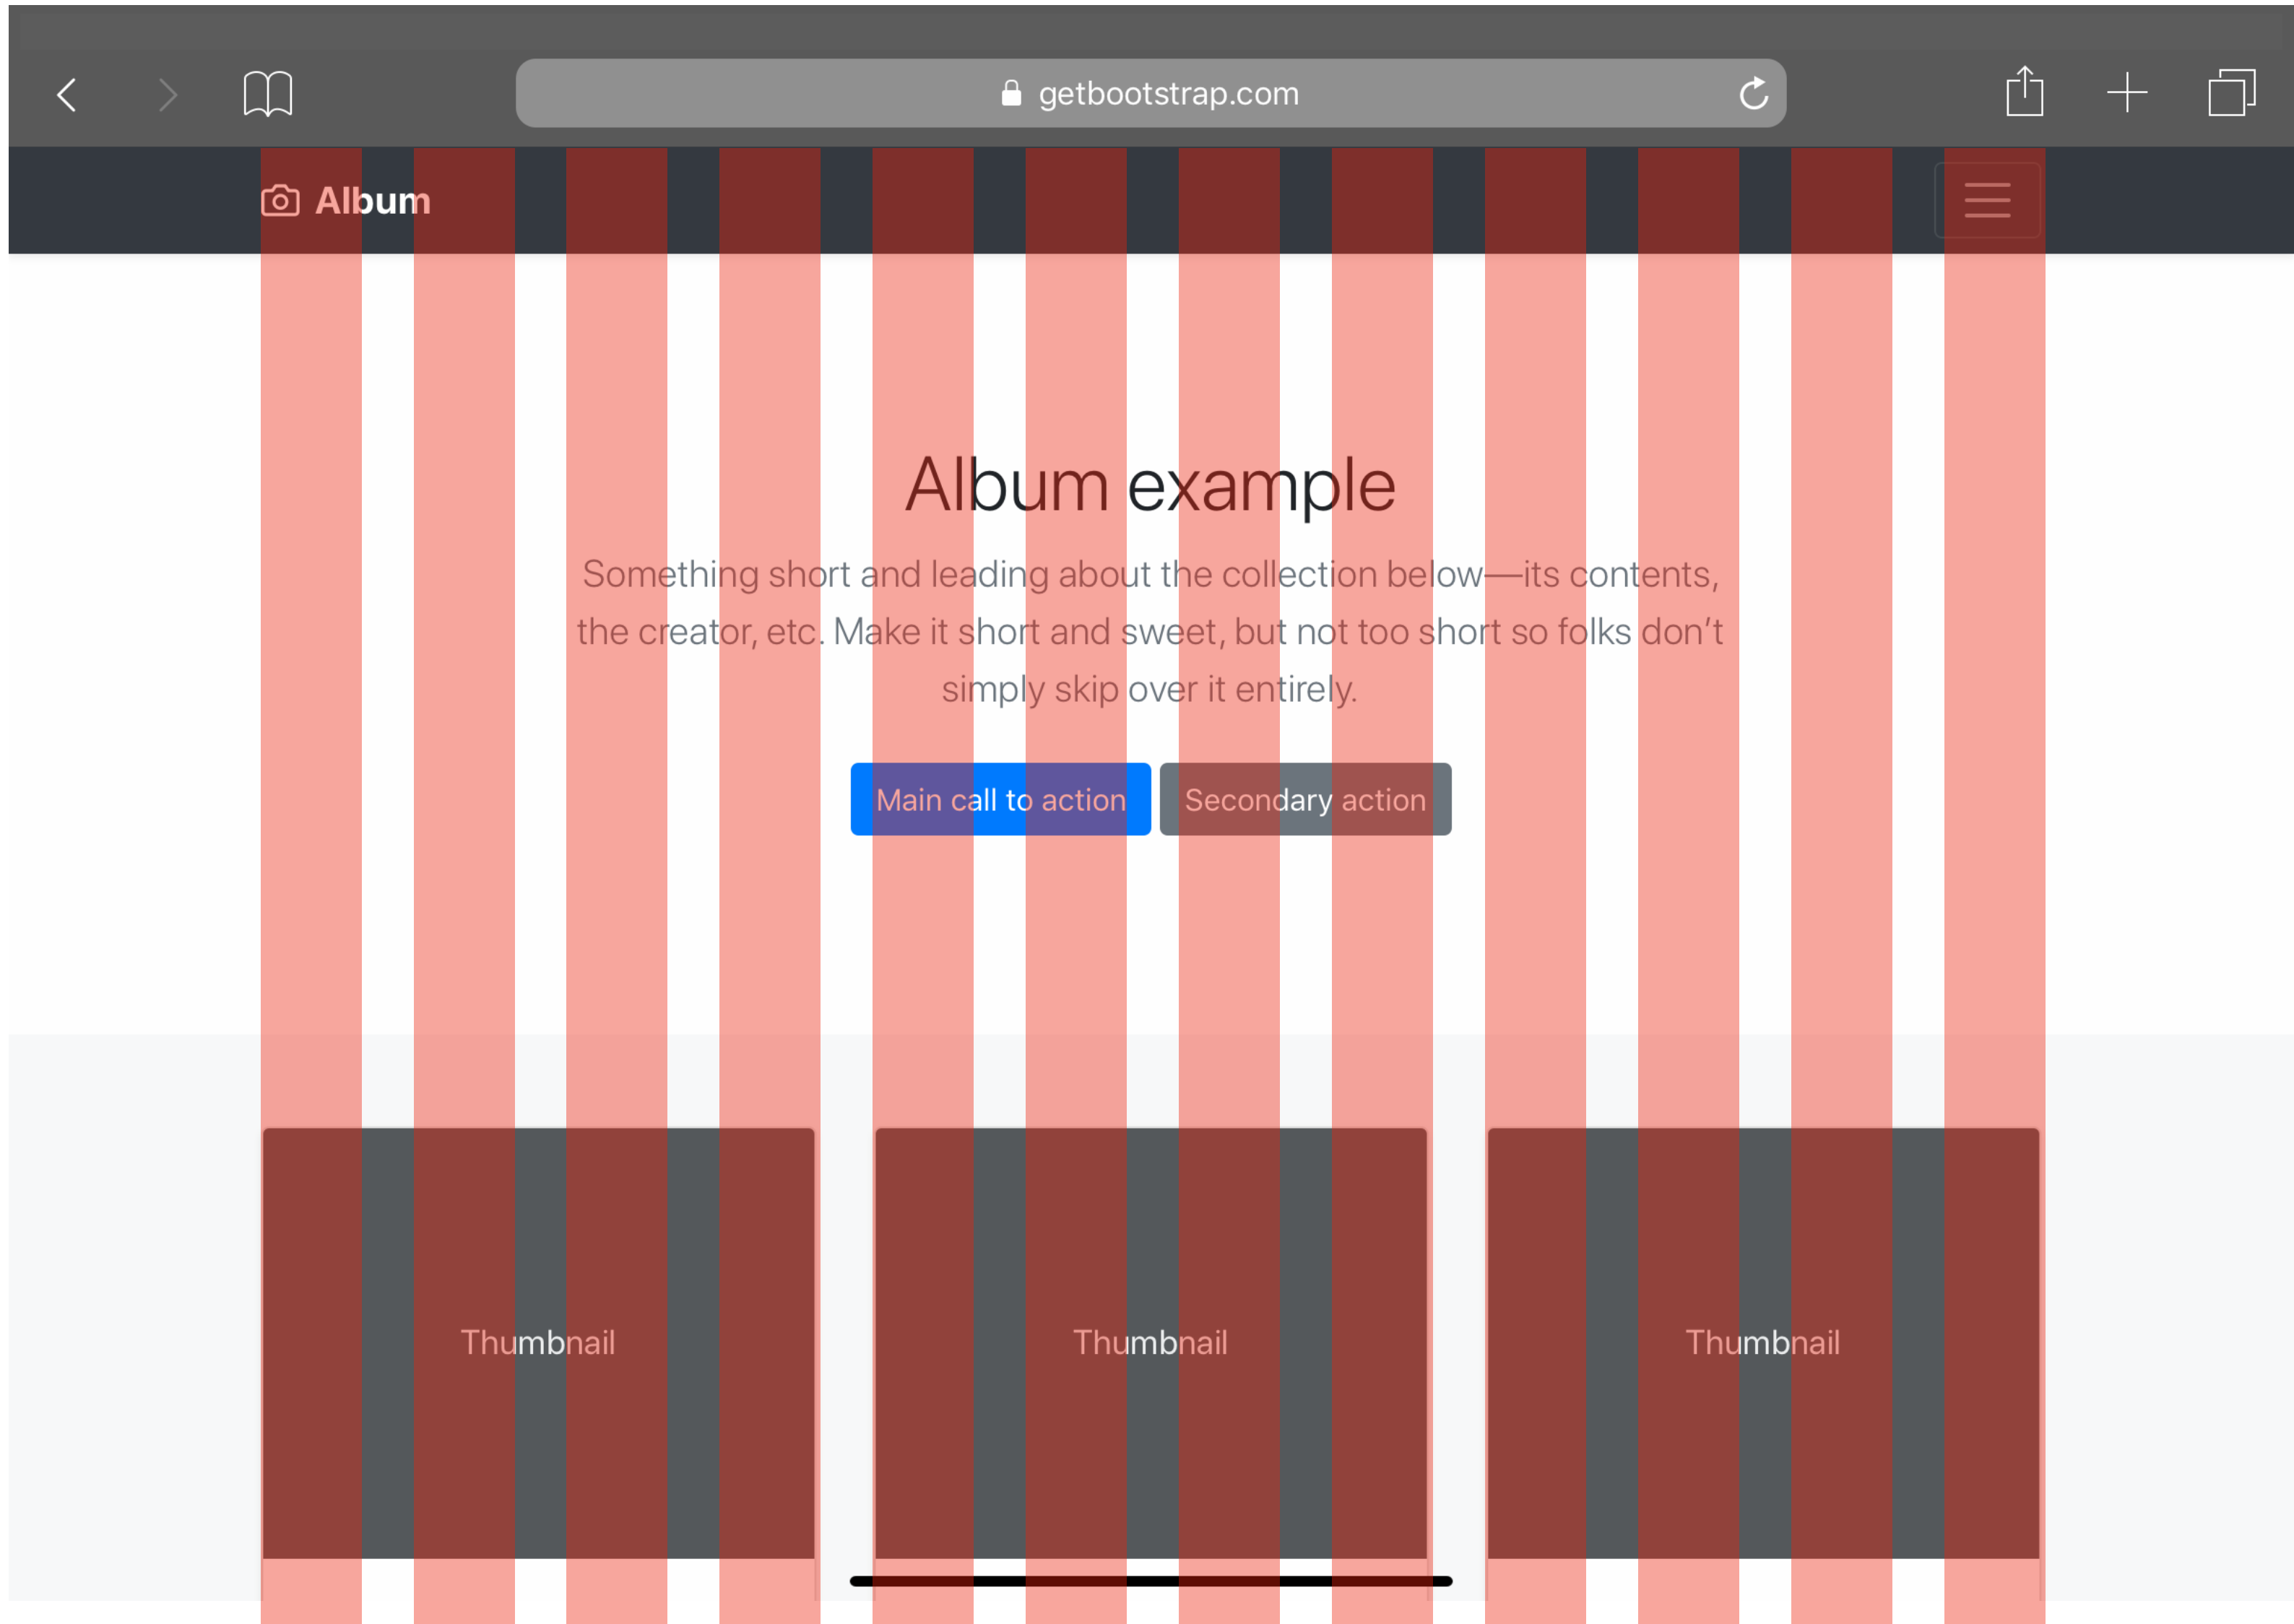

```
<div class="container">
  <div class="row">
    <div class="col-4">
      One of three columns
    </div>
    <div class="col-4">
      One of three columns
    </div>
    <div class="col-4">
      One of three columns
    </div>
  </div>
</div>
```

	Extra small <576px	Small ≥576px	Medium ≥768px	Large ≥992px	Extra large ≥1200px
Max container width	None (auto)	540px	720px	960px	1140px
Class prefix	.col-	.col-sm-	.col-md-	.col-lg-	.col-xl-
# of columns	12				
Gutter width	30px (15px on each side of a column)				
Nestable	Yes				
Column ordering	Yes				