


Populating Next Right Pointers in Each Node

: Populate each next pointer to point its next right node. If there's no next right node, the next pointer should be set to NULL.

Ex)

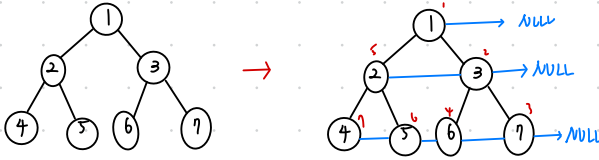

Q = collections.deque([root])

while Q:

size = len(Q)

for i in range(size):

node = Q.popleft()

if i < size - 1:

node.next = Q[0]

if node.left:

Q.append(node.left)

if node.right:

Q.append(node.right)

return root

① Q = [1]

② Q = [2, 3] : 2 > 3

③ Q = [3, 4, 5]

④ Q = [4, 5, 6, 7]

⑤