

Cucumber Report

16 Jan 2025, 15:57:08

Start : Jan 16, 3:57:01.542 pm

End : Jan 16, 3:57:07.688 pm

Duration : 6.146 s

Features

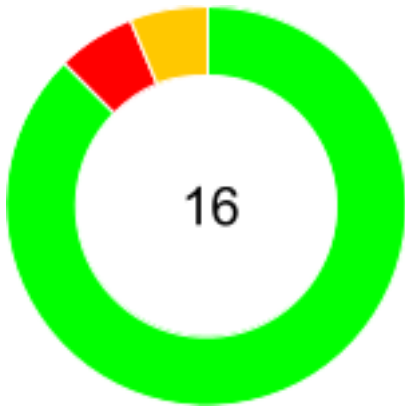
Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 2
FAILED - 1
SKIPPED - 0

PASSED - 14
FAILED - 1
SKIPPED - 1

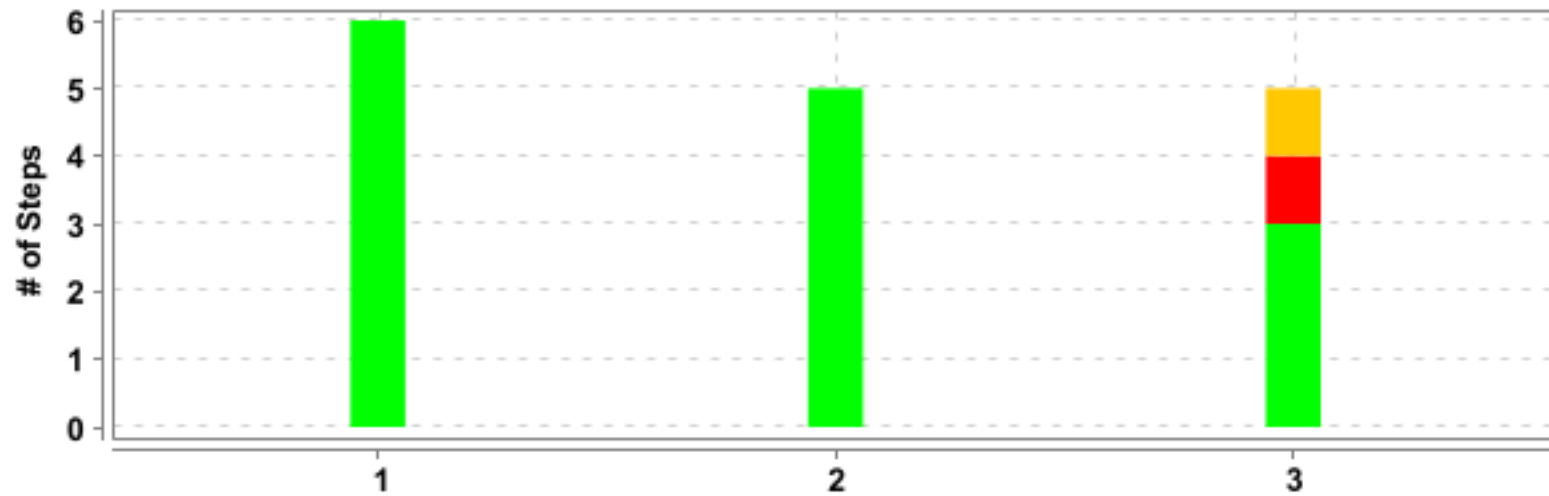


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>CRUD operation for Spotify Playlist via Spotify API</u>	6.146 s	3	2	1	0	16	14	1	1

Tag	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@Spotify	3	2	1	0	1	0	1	0
@Api	3	2	1	0	1	0	1	0
@1	3	2	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>CRUD operation for Spotify Playlist via Spotify API</u>	3	2	1	0	6.146 s

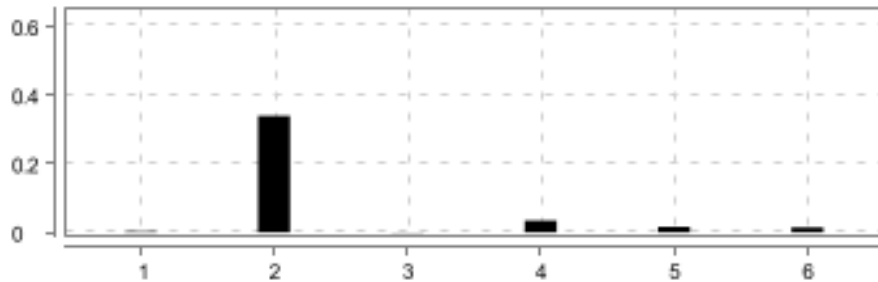



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>CRUD operation for Spotify Playlist via Spotify API</u>	<u>Create a new playlist</u>	6	6	0	0	2.992 s
2	<u>CRUD operation for Spotify Playlist via Spotify API</u>	<u>Get created playlist</u>	5	5	0	0	0.211 s
3	<u>CRUD operation for Spotify Playlist via Spotify API</u>	<u>Change Playlist Details</u>	5	3	1	1	2.932 s

CRUD operation for Spotify Playlist via Spotify API

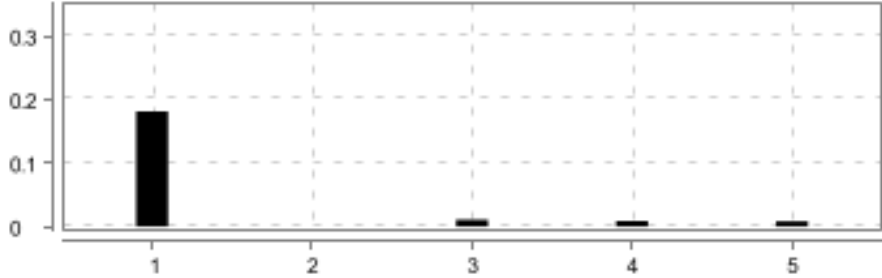

FAILED	DURATION - 6.146 s	Scenarios		Steps	
/ 3:57:01.542 pm // 3:57:07.688 pm /		Total - 3		Total - 16	
		Pass - 2		Pass - 14	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	

Create a new playlist

<div>PASSED</div> <div>DURATION - 2.992 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 6</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 3:57:01.545 pm // 3:57:04.537 pm /</div>				
<div>CRUD operation for Spotify Playlist via Spotify API</div>				
<div>@Spotify @Api @1</div>				

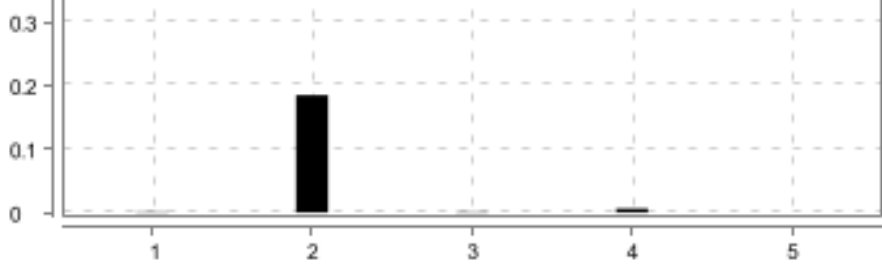

#	Step / Hook Details	Status	Duration
1	Given I create request body with given : "My New Playlist3", "A cool playlist created via API", "true"	PASSED	0.003 s
2	When I send a POST request to "/users/{user_id}/playlists" with user ID "nil_idil" and the playlist details	PASSED	0.339 s
3	Then the status code should be 201	PASSED	0.001 s
4	And the response should contain "name" with value "My New Playlist3"	PASSED	0.034 s
5	And the response should contain "description" with value "A cool playlist created via API"	PASSED	0.016 s
6	And the response should contain "public" with value "true"	PASSED	0.014 s

Get created playlist

PASSED	DURATION - 0.211 s		Steps Total - 5 Pass - 5 Fail - 0 Skip - 0	
/ 3:57:04.541 pm // 3:57:04.752 pm /				
CRUD operation for Spotify Playlist via Spotify API				
@Spotify @Api @1				

#	Step / Hook Details	Status	Duration
1	Given I send a GET request to "/playlists/{playlist_id}" with the stored playlist ID	PASSED	0.181 s
2	Then the status code should be 200	PASSED	0.000 s
3	And the response should contain "name" with value "My New Playlist3"	PASSED	0.011 s
4	And the response should contain "description" with value "A cool playlist created via API"	PASSED	0.009 s
5	And the response should contain "public" with value "true"	PASSED	0.008 s

Change Playlist Details

FAILED	DURATION - 2.932 s		Steps Total - 5 Pass - 3 Fail - 1 Skip - 1	
/ 3:57:04.756 pm // 3:57:07.688 pm /				
CRUD operation for Spotify Playlist via Spotify API				
@Spotify @Api @1				

#	Step / Hook Details	Status	Duration
1	Given I create request body with given : "My New Playlist5", "A enjoyable playlist created via API", "true"	PASSED	0.001 s
2	When I send a PUT request to "/playlists/{playlist_id}" with stored playlist id and the playlist details	PASSED	0.185 s
3	Then the status code should be 200	PASSED	0.001 s
4	And the response should contain "name" with value "My New Playlist5"	FAILED	0.006 s
	io.restassured.path.json.exception.JsonPathException: Failed to parse the JSON document at io.restassured.path.json.JsonPath\$ExceptionHandler.invoke(JsonPath.java:1002) at io.restassured.path.json.JsonPath\$4.doParseWith(JsonPath.java:967) at io.restassured.path.json.JsonPath\$JsonParser.parseWith(JsonPath.java:1047) at io.restassured.path.json.JsonPath.get(JsonPath.java:202)		

#	Step / Hook Details	Status	Duration
	<p>at stepdefinitions.APISteps.SpotifyStepDefs.theResponseShouldContainWithValue(SpotifyStepDefs.java:34)</p> <p>at ?.the response should contain "name" with value "My New Playlist5"(file:///C:/Users/sgokturk/Desktop/java-selenium-cucumber/.src/test/resources/features/APIfeatures/SpotifyCRUDPlaylist.feature:31)</p> <p>Caused by: java.lang.IllegalArgumentException: The JSON input text should neither be null nor empty.</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)</p> <p>at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73)</p> <p>at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108)</p> <p>at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallConstructor(CallSiteArray.java:57)</p> <p>at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:263)</p> <p>at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277)</p> <p>at io.restassured.internal.path.json.ConfigurableJsonSlurper.parseText(ConfigurableJsonSlurper.groovy:80)</p> <p>at io.restassured.path.json.JsonPath\$4\$1.method(JsonPath.java:965)</p> <p>at io.restassured.path.json.JsonPath\$ExceptionHandler.invoke(JsonPath.java:1000)</p> <p>at io.restassured.path.json.JsonPath\$4.doParseWith(JsonPath.java:967)</p> <p>at io.restassured.path.json.JsonPath\$JsonParser.parseWith(JsonPath.java:1047)</p> <p>at io.restassured.path.json.JsonPath.get(JsonPath.java:202)</p> <p>at stepdefinitions.APISteps.SpotifyStepDefs.theResponseShouldContainWithValue(SpotifyStepDefs.java:34)</p> <p>at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:103)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:580)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:62)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:84)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:229) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) </pre> <p>* Not displayable characters are replaced by '?'. </p>		
5	And the response should contain "description" with value "A enjoyable playlist created via API"	SKIPPED	0.000 s
	AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	2.738 s
	screenshots		