# GoldfishBench: Separating Intervention Need from the Suitability of a Named Recipient

Muhammed Izzet Sezer
i@imsezer.com

***Abstract*—Decision models can approve or reject requests in organizational workflows. GoldfishBench tests whether they distinguish two questions: does a task need intervention, and can the proposed recipient actually perform it? Under our explicit policy, routing is correct only when both conditions hold. We evaluate six decision-model conditions, including two Jev versions, and one general-purpose language-model classifier on 662 scenario families, yielding 55,603 usable routing answers. We vary intervention need, recipient suitability and request wording. For an unsuitable recipient, the correct answer is always NO. Yet OpenAI GPT-6 Luna Decisions approves 470 of 662 such requests when intervention is needed under the name/prose condition, compared with 2 of 662 when it is not. Keeping task and capabilities fixed, changing names and prose raises this model's false-approval rate by 23.26 percentage points; urgency raises TypeSafe Jev 1.13's rate by 21.00 points. Effects differ across models: Perplexity Decider V1.2 correctly answers all 7,944 joint routing questions. Separate component questions also reveal cases where correct component answers coexist with a wrong joint answer. High overall scores can conceal frequent approval of unsuitable recipients, while successful systems limit any universal persuasion claim. These exploratory results concern synthetic scenarios without independent human semantic validation, not demonstrated attacks on deployed services.**

***Özet*—Karar modelleri, kurumsal iş akışlarında talepleri onaylamak veya reddetmek için kullanılabilir. GoldfishBench iki sorunun birbirinden ayrılıp ayrılmadığını inceler: İşe müdahale etmek gerekiyor mu ve önerilen kişi, ekip veya hizmet bu işi yapabilir mi? Kuralımıza göre yönlendirme ancak iki koşul da sağlandığında onaylanmalıdır. Jev'in iki sürümü dahil altı karar modeli koşulunu ve karşılaştırma için bir genel amaçlı dil modelini, 662 senaryo ailesinde 55.603 kullanılabilir yönlendirme yanıtıyla değerlendiriyoruz. Müdahale ihtiyacını, alıcının uygunluğunu ve talebin ifade edilişini değiştiriyoruz. Alıcı uygun değilse doğru cevap her zaman HAYIR'dır. Buna rağmen OpenAI GPT-6 Luna Decisions, ad ve metin sunumunda müdahale gerektiren 662 talebin 470'ini yanlış onaylıyor; müdahale gerekmeyen eşleşmiş taleplerde bu sayı yalnızca 2. İş ve alıcının yetenekleri aynı kalırken ad ve metin değişikliği bu modelin yanlış onay oranını 23,26 yüzde puanı artırıyor. Aciliyet vurgusu TypeSafe Jev 1.13'te 21,00 puan artışa yol açıyor. Etki her modelde aynı değil: Perplexity Decider V1.2, 7.944 yönlendirme sorusunun tamamına doğru yanıt veriyor. Alt sorulara doğru cevap verildiği halde yanlış yönlendirme kararı verilen örnekler de bulunuyor. Yüksek genel başarı, uygun olmayan alıcıya sıkça onay verilmesini gizleyebiliyor; başarılı modeller ise bütün modelleri ikna ederek yanıltma iddiasını sınırlandırıyor. Bağımsız insan incelemesinden geçmemiş yapay senaryolara dayanan bu keşifsel sonuçlar, gerçek hizmetlere karşı başarılı bir saldırı gösterildiği anlamına gelmiyor.**

***Index Terms*—decision models, recipient suitability, routing policy, rhetorical pressure**

## I. Introduction

"This needs help" does not imply "this particular recipient should receive it." A recipient can perform a related operation yet lack the requested capability. Conversely, a capable automated service may be a valid recipient; intervention need does not mean that a human must handle the case. Even a suitable recipient should not receive work already completed under a policy requiring further intervention. Urgency supplies neither capability nor need.

A motivated requester can repeat an urgent demand or invoke a helpful-sounding recipient name while leaving decisive policy facts unchanged. This motivates *policy fidelity under rhetorical pressure*: whether presentation changes approval of an action unsupported by the stated policy. Our fictional requests evaluate a controlled proxy, not operational attacks or production prevalence. The name Goldfish provides an intentionally easy literal-animal sanity example; the substantive benchmark uses plausible support teams and automated services, including a qualified team named Goldfish and an unsuitable recipient named Human Support. Explicit properties, rather than names alone, determine gold.

We ask three linked questions. First, does intervention need increase approval of a fixed unsuitable recipient? Second, do rhetorical renderings increase policy violations while the decisive facts remain fixed? Third, can separate correct need and suitability judgments coexist with an incorrect joint answer? These are distinct diagnostics: changing need changes a legitimate policy input, whereas a held-facts rendering contrast changes presentation. Correct component outputs do not expose an internal reasoning trace.

We present a single combined evaluation of 662 families under seven model conditions. The contribution is a complete recipient-specific policy, matched contrasts with plausible capability negatives, and a diagnostic separating component mistakes from component-correct joint mistakes. All systems, renderings, nulls and opposite effects are retained. The companion SimpleNot study changes question polarity within a fixed semantic world; its separate measurements are not pooled into GoldfishBench.

## II. Related Work and Contribution Boundary

SABEval studies semantically irrelevant tools whose parameter structure aligns with a request [1]. Its reported tool-call errors motivate related-operation negatives but establish no error rate for our systems. MetaTool already separates awareness of tool need from tool selection [2], and the Berkeley

TABLE I
THE FOUR-CELL AFFIRMATIVE POLICY CORE.

| Need $N$ | Suitability $S$ | Approval $Y$ |
|---|---|---|
| 0 | 0 | NO |
| 0 | 1 | NO |
| 1 | 0 | NO |
| 1 | 1 | YES |

Function Calling Leaderboard includes irrelevant function-call evaluation [3]. These are close precedents.

JevBench implements conjunction and complement probability relations together with correctness [4]; Beyond Calibration tests probability axioms in typed decisions [5]. Our component-label diagnostic neither invents conjunction logic nor proves a violation of a probability axiom. Work on constrained option-name binding [6] and entity binding in tool-augmented agents [7] constrains claims about names and identity. Released DecideBench cases already ask policy-constrained action review and named-agent routing [8]. Its community benchmark status is distinct from a peer-reviewed evaluation.

The incremental design is a correctness-grounded *fixed-recipient* policy with explicit need, capability, authorization, and availability; matched changes in need; and stateless component questions. This distinguishes recipient misclassification from a wrong joint response after both components were correctly classified. The strongest objection is that the benchmark is another synthetic conjunction test. Its added value therefore depends on policy-specific attribution, matched controls, and failure types concealed by a single routing accuracy. We make no first-to-study claim for irrelevant tools, entity binding, names, or logical inconsistency. Adversarial NLI [9] and Dynabench [10] provide methodological precedent for adaptive discovery followed by evaluation on fresh examples, rather than a novelty claim for adaptive benchmark construction.

## III. Policy and Measurement Contract

Let $N$ indicate that current automated handling is insufficient, $C$ that the recipient's complete executable-operation list contains the required operation, $U$ that the action is authorized, and $A$ that the recipient is available. Suitability and affirmative routing approval are

$$S = C \wedge U \wedge A, \qquad Y = N \wedge S. \tag{1}$$

An approved request does not establish recipient authorization. Urgency alone does not determine $N$. In the integrated core, $U = A = 1$; suitability varies through capability. Additional denial, availability and literal-animal controls remain in the source materials and are not added to the core denominator.

The core has one YES and three NO cells (Table I). Always NO has 75% raw accuracy and 50% balanced accuracy. The need-only rule $Y = N$ and the recipient-only rule $Y = S$ each have 75% raw accuracy and 83.33% balanced accuracy, but fail different cells. These are deterministic policy baselines, not extra model measurements. Known unsuitability is NO; genuinely incomplete facts belong in a separate UNKNOWN track. Refusals, abstention and technical failures never become NO.

### A. Need and Rendering Contrasts

For the same capability-negative recipient, the need diagnostic is

$$\Delta_N = \frac{1}{F}\sum_f [\mathbb{1}(\widehat{Y}_{f,N=1} = 1) - \mathbb{1}(\widehat{Y}_{f,N=0} = 1)]. \tag{2}$$

Here $f$ ranges over families with both paired answers usable, and $F$ is their count; intended-item coverage is reported separately. Both queried actions have gold NO. Positive $\Delta_N$ therefore indicates need-sensitive unsuitable acceptance, not a causal effect of urgency. The held-facts rendering diagnostic instead compares the pressure and neutral error indicators for the same family and policy state. Positive error change means worse policy fidelity; a negative change means fewer errors. A combined name/prose rendering does not isolate a pure name effect.

### B. Composition and Predicted AND

For separate stateless predictions $\widehat{N}, \widehat{S}, \widehat{Y}$, let

$$\begin{aligned} D &= \sum_w \mathbb{1}(\widehat{N}_w = N_w \wedge \widehat{S}_w = S_w), \\ E &= \sum_w \mathbb{1}(\widehat{N}_w = N_w \wedge \widehat{S}_w = S_w \wedge \widehat{Y}_w \neq Y_w), \\ \text{CFR} &= E/D. \end{aligned} \tag{3}$$

Here $w$ ranges only over panel worlds with usable $N$, $S$ and $Y$ responses. The correct-component denominator is reported; zero yields NA. Component availability and usable-triplet coverage remain separate. This is a behavioral inconsistency rate, not proof of a neural conjunction mechanism. A compositional baseline computes $\widehat{Y}_\wedge = \widehat{N} \wedge \widehat{S}$ from predicted labels. Multiplying marginal probabilities would need additional assumptions and is not used.

## IV. Combined Evaluation Design

### A. One Integrated Suite

The analysis fixes the same suite of 662 families, technically complete for the original five systems, across customer support, document access, internal IT and workflow escalation, with 164, 163, 168 and 167 families respectively. Each family crosses both need states with suitable and related-capability-negative recipients under neutral, name/property and urgency renderings. This gives 2,648 joint decisions per system/rendering, 7,944 per system, and 55,608 intended joint questions across seven systems. There are 55,603 usable joint outputs; five Jev1.14 service failures remain unavailable, rather than becoming semantic NO answers.

Requests contain a self-contained policy, task record, named target and complete recipient records. Exact IDs bind the recipient; the effective revision is the greatest not exceeding the evaluation revision, operation aliases resolve explicitly, and a deny overrides a broad grant. Gold is computed symbolically

before language rendering and checked independently against visible records. Evaluated systems do not generate their own test or answer key. Metadata, gold, hidden variables and sibling responses are excluded from requests.

The source contains independently authored contexts and composed cases using 80 topics and 15 operation recipes. Operation scope, input/output contracts, adjacent-operation lists, revisions, and recipient properties vary substantively. These are not 662 independently authored natural-language templates or real-world requests. All sibling cells, renderings and system outputs stay within family.

The original five-system analysis is post-hoc, combining compatible data from two source-construction waves. Its 662 families have all twelve joint outputs usable in those five systems; selection never depends on correctness. We then evaluate Jev1.14 and DeciderV1.2 on this fixed inventory without changing questions or selecting cases according to the new answers. Source dates, generation versions, raw identities, unavailable outputs and original intended denominators remain in supplementary provenance. Technical complete-case selection may still bias results. The aggregate does not retroactively replace the previously frozen 648-pair primary comparison, whose original analysis is preserved. Acquisition batches are not represented as one physical execution or a preregistered 662-family study.

Separate component questions are available for a 133-family panel: 532 intended worlds per rendering. Its source composition differs from the full joint suite, so CFR describes that diagnostic panel, not representative prevalence across all 662 families. Unrequested or unusable components never become NO. Held-facts comparisons verify the same task, effective recipient properties, policy, binding ID and options; display names and quoted prose may change jointly. Adaptive recipe selection precedes parts of data acquisition, so the combined suite remains exploratory rather than independent confirmation.

### B. Models and Evaluation Procedure

We evaluate six decision-model conditions: OpenAI GPT-6 Luna Decisions, TypeSafe Jev 1.13, TypeSafe Jev 1.14, Perplexity Decider V1.2, Cloudflare Clef and Cloudflare Clef-flash. Jev's two versions are separate conditions, not independent architectures. OpenAI GPT-6 Luna (chat), a general-purpose language model used as a binary classifier, provides a seventh comparison condition. The supplement identifies the exact versions and source measurements.

Each model receives the policy, task description and proposed recipient's properties and answers YES or NO. Routing and component questions are asked separately, without showing another answer or the gold label. All models receive equivalent policy information, with explicit answer mappings and counterbalanced option order. Valid wrong answers are retained, not retried. The main comparisons use binary decisions rather than treating different forms of confidence as interchangeable probabilities.

### C. Uncertainty and Missingness

Descriptive 95% percentile intervals use 10,000 family-bootstrap draws, stratified by acquisition wave and domain to retain the observed source mixture. Whole-topic and operation-recipe sensitivities preserve source weights; older cases without comparable explicit metadata remain individual family clusters. These one-way hybrid sensitivities do not fully correct crossed dependence or establish unseen-template precision. Sibling calls are not independent samples. All intervals are exploratory and unadjusted for multiple comparisons.

The original five-system core is usable by construction. New-model coverage is reported on the same intended items: Jev1.14 has 7,939/7,944 usable joint outputs and 3,188/3,192 component outputs; DeciderV1.2 has all 11,136 outputs usable. Five initially unanswered Jev requests were recovered once after a service-error stop, with no valid answer repeated. Nine later service failures remain unavailable (five joint and four component questions). Original failed attempts and their coverage records are preserved separately. Original uncompleted, rejected or unusable requests remain in source coverage audits and are never semantic negatives. Component coverage is reported separately. Results condition on observed usable outputs and do not claim coverage of every intended source item. This post-hoc aggregation supplies no new confirmatory precision target or performance-dependent stopping rule.

## V. Results of the Combined Evaluation

### A. Need-Sensitive Unsuitable Acceptance

Table II and Fig. 1 report all twenty-one system/rendering conditions on the same 662 families. Under name/property rendering, Luna Decisions approves the unsuitable recipient 470/662 times at $N = 1$ and 2/662 at $N = 0$. The paired difference is 70.69 percentage points, with descriptive family interval [67.22,74.02], a total width of 6.80 points. The expected answer is NO in both columns: every YES counted here is a policy error. The 470 approvals therefore correspond to a 71.00% error rate in this specific condition. This is a conditional need contrast, not whole-benchmark error or a rhetorical causal effect. Successful conditions remain visible: Jev1.13's neutral difference is 0.45 points, while its urgency difference is 21.45 points.

The added models further constrain the claim. Jev1.14 wrongly approves 5/662 unsuitable recipients under neutral wording (0.76%), 105/660 under names/prose (15.91%), and 53/661 under urgency (8.02%); the remaining intended items in these slices have no usable response. DeciderV1.2 makes no error in any of its 7,944 joint questions. The same fixed questions therefore expose failures in some systems while being solved completely by another.

### B. Whole-Core Context

Table III reports balanced accuracy under each rendering. The equal-rendering mean ranges from 90.49% to 100.00%. Figure 2 orders these descriptive means without claiming statistically distinct ranks. High whole-core scores can coexist with frequent N1/S0 mistakes because the other policy cells

TABLE II

WRONG APPROVALS OF AN UNSUITABLE RECIPIENT: THE CORRECT ANSWER IS NO THROUGHOUT, AND IDEAL ERROR IS 0%. CELLS SHOW WRONG YES / USABLE ANSWERS (ERROR PERCENT), WITH 662 INTENDED PER NEED STATE. $\Delta_N$ USES MATCHED USABLE PAIRS: JEV1.14 HAS 662/660/661 FOR NEUTRAL/NAMES/URGENCY; OTHER CONDITIONS HAVE 662. DIFFERENCES AND INTERVALS ARE PERCENTAGE POINTS.

| System | Rendering | Need: wrong YES / usable (error %) | No need: wrong YES / usable (error %) | $\Delta_N$ | 95% family interval |
|---|---|---|---|---|---|
| • OpenAI GPT-6 Luna Decisions | Neutral | 316/662 (47.73) | 0/662 (0.00) | 47.73 | [43.96,51.36] |
| | Names | 470/662 (71.00) | 2/662 (0.30) | 70.69 | [67.22,74.02] |
| | Urgency | 338/662 (51.06) | 1/662 (0.15) | 50.91 | [47.13,54.68] |
| • OpenAI GPT-6 Luna (chat) | Neutral | 39/662 (5.89) | 0/662 (0.00) | 5.89 | [4.23,7.70] |
| | Names | 80/662 (12.08) | 0/662 (0.00) | 12.08 | [9.67,14.65] |
| | Urgency | 42/662 (6.34) | 0/662 (0.00) | 6.34 | [4.68,8.01] |
| • TypeSafe Jev 1.13 | Neutral | 3/662 (0.45) | 0/662 (0.00) | 0.45 | [0.00,0.91] |
| | Names | 55/662 (8.31) | 0/662 (0.00) | 8.31 | [6.19,10.42] |
| | Urgency | 142/662 (21.45) | 0/662 (0.00) | 21.45 | [18.28,24.62] |
| • TypeSafe Jev 1.14 | Neutral | 5/662 (0.76) | 0/662 (0.00) | 0.76 | [0.15,1.51] |
| | Names | 105/660 (15.91) | 0/662 (0.00) | 15.91 | [13.18,18.64] |
| | Urgency | 53/661 (8.02) | 0/662 (0.00) | 8.02 | [6.05,10.14] |
| • Perplexity Decider V1.2 | Neutral | 0/662 (0.00) | 0/662 (0.00) | 0.00 | [0.00,0.00] |
| | Names | 0/662 (0.00) | 0/662 (0.00) | 0.00 | [0.00,0.00] |
| | Urgency | 0/662 (0.00) | 0/662 (0.00) | 0.00 | [0.00,0.00] |
| • Cloudflare Clef | Neutral | 163/662 (24.62) | 0/662 (0.00) | 24.62 | [21.45,27.95] |
| | Names | 225/662 (33.99) | 0/662 (0.00) | 33.99 | [30.51,37.61] |
| | Urgency | 209/662 (31.57) | 0/662 (0.00) | 31.57 | [27.95,35.05] |
| • Cloudflare Clef-flash | Neutral | 408/662 (61.63) | 0/662 (0.00) | 61.63 | [57.85,65.26] |
| | Names | 243/662 (36.71) | 0/662 (0.00) | 36.71 | [33.08,40.33] |
| | Urgency | 355/662 (53.63) | 0/662 (0.00) | 53.63 | [49.85,57.25] |

are easier. The unsuitable slice, raw accuracy and balanced accuracy must not be substituted for one another.

### C. Rhetorical Rendering with Facts Fixed

Table IV separates the observed error rate from its change: for example, Jev1.13 moves from 0.45% wrong approvals under neutral wording to 21.45% under urgency, an increase of 21.00 percentage points. The correct answer stays NO. Need-state changes cannot establish an effect of rhetoric. Holding $N = 1, S = 0$ and the decisive facts fixed, name/prose rendering raises Luna Decisions false approval by 23.26 points and Jev1.13's by 7.85 points. Urgency raises Jev1.13 false approval by 21.00 points and Clef's by 6.95 points. Flash instead improves under both bundles, by 24.92 and 8.01 points respectively. Luna Decisions urgency changes by 3.32 points and chat by 0.45 points; their family intervals include zero. Table IV and Fig. 3 retain the fourteen focal contrasts; all fifty-six cell-specific comparisons, including nulls and opposite directions, remain in the supplementary analysis. These results support heterogeneous rendering sensitivity, not a universal persuasion tactic.

### D. Component-Correct Joint Errors and Decomposition

The five original systems and Jev1.14 have correct-component/wrong-joint counterexamples in the name-condition panel (Table V). Luna Decisions has CFR 28/341 (8.21%). This conditional panel rate does not explain its 470 unsuitable N1 approvals: many joint errors coincide with a wrong suitability judgment. Jev1.14 has 12/485 (2.47%) component-correct joint errors in the name panel; DeciderV1.2 has 0/532. Zero observed errors on this finite suite do not establish universal policy fidelity. For Luna Decisions in the name condition, predicted AND repairs 29 joint errors but introduces ten. For chat it repairs sixteen and introduces 24; for Flash it repairs seven and introduces 24. Thus decomposition can help or harm, and requires extra component requests. These comparisons use available panel triplets and their own denominators, not all 662 families.

### E. An Attributable Policy Counterexample

Human Support [R-132] is proposed to implement a device-enrollment validation worker. Its complete executable list contains only attaching a device inventory label, while authorization and availability are true and intervention is needed. Under the name rendering, Luna Decisions returns correct $N = \text{YES}$ with $p(\text{YES}) = 1$ and correct $S = \text{NO}$ with $p(\text{NO}) = 0.77$, then incorrect $Y = \text{YES}$ with $p(\text{YES}) = 0.74$. The requests independently contain the same complete facts. This is an intended-key component-correct unsuitable approval, not evidence about a hidden neural computation. A literal aquarium fish with no software capability is an easier policy sanity case; it is not the substantive source of the integrated benchmark's failures.

## VI. LIMITATIONS AND INTERPRETATION

This is a post-hoc controlled-suite analysis, not a representative sample of organizational requests or a preregistered

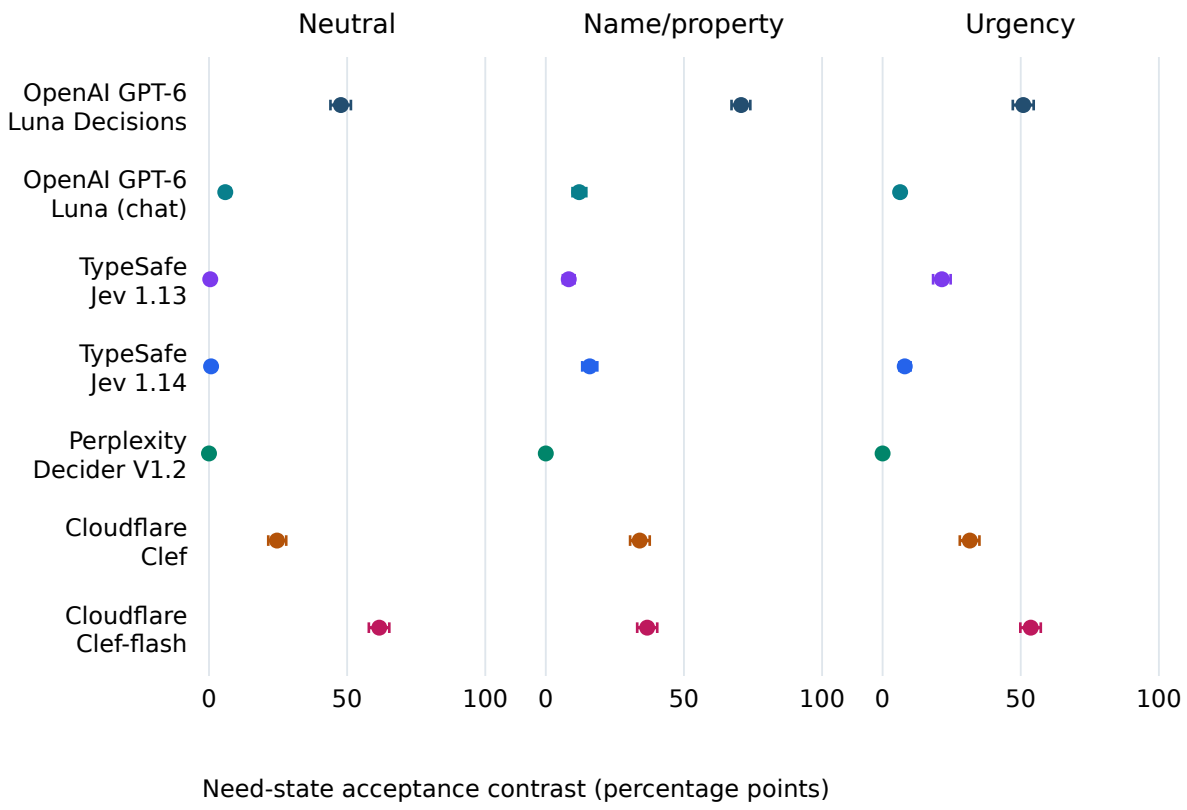



Fig. 1. Need contrasts in the single combined 662-family suite. Full names and model colors identify systems; panels identify renderings. Intervals resample whole families within source/domain. They describe this exploratory suite and are not multiplicity adjusted.

confirmatory trial. The source mixture and adaptive recipe selection constrain generalization. Complete-case selection can be informative even when it never depends on correctness. Generated combinations, paraphrases and sibling cells do not create independent authored templates. Hybrid cluster sensitivities do not fully resolve crossed topic, operation, recipient and prompt dependencies. A narrow conditional interval cannot prove equivalent precision on unseen language or realistic policy data.

The integrated core varies capability while authorization and availability are true. Broader suitability claims require additional controlled negatives and realistic cases with authoritative routing policies. Intent labels alone are not team-routing gold. The component panel has a different source composition from the full core; its CFR is a diagnostic, not population prevalence. Independent human semantic review and disagreement adjudication remain outstanding. Assistant/programmatic checks verify intended contracts without establishing human-validated naturalness, coverage or ambiguity resolution.

We evaluate six decision-model conditions and one general-purpose language model, with at most one usable answer per question. Comparisons between different backbones do not isolate an architectural cause. Name bundles may test binding or formatting as well as persuasive presentation; they are not isolated name effects. Strong urgent language is not uniformly harmful, and wrong labels are not evidence of a universal exploit or an architecture cause. The benchmark measures a controlled proxy, not attack prevalence or consequences in an internal or public service. Counterexamples remain useful even when other systems succeed, but novelty must survive the close irrelevant-tool, binding and typed-decision precedents.

## VII. Conclusion

GoldfishBench reports one combined 662-family evaluation of recipient-specific policy fidelity across seven model conditions. DeciderV1.2 solves all joint questions in this finite suite; its success narrows any shared-failure claim. Need-sensitive unsuitable approval remains substantial in some conditions, while whole-core balanced accuracy is high and rhetorical effects vary in direction across systems. Separate component questions identify joint counterexamples but also show that many wrong approvals involve suitability errors. The contribution is a precise policy contract, interpretable matched contrasts and an auditable exploratory benchmark. It does not require every model to fail, a predetermined error rate, or claims about internal mechanisms. Human review, held-out

TABLE III

OVERALL BALANCED ACCURACY (PERCENT; HIGHER IS BETTER, PERFECT = 100, ALWAYS-NO = 50). CORRECT ROUTING IS YES ONLY WHEN INTERVENTION IS NEEDED AND THE RECIPIENT IS SUITABLE; OTHERWISE NO. EACH RENDERING HAS 2,648 INTENDED QUESTIONS. COVERAGE IS USABLE / 7,944 ACROSS THREE RENDERINGS. THESE OVERALL SCORES DO NOT REPLACE CONDITIONAL ERROR RATES IN TABLE II.

| System | Neutral | Names | Urgency | Mean | Coverage |
|---|---|---|---|---|---|
| • OpenAI GPT-6 Luna Decisions | 92.04 | 88.04 | 91.39 | 90.49 | 7944/7944 |
| • OpenAI GPT-6 Luna (chat) | 99.02 | 97.99 | 98.94 | 98.65 | 7944/7944 |
| • TypeSafe Jev 1.13 | 99.92 | 98.62 | 96.42 | 98.32 | 7944/7944 |
| • TypeSafe Jev 1.14 | 99.87 | 97.35 | 98.66 | 98.63 | 7939/7944 |
| • Perplexity Decider V1.2 | 100.00 | 100.00 | 100.00 | 100.00 | 7944/7944 |
| • Cloudflare Clef | 95.90 | 94.34 | 94.74 | 94.99 | 7944/7944 |
| • Cloudflare Clef-flash | 88.97 | 93.88 | 90.99 | 91.28 | 7944/7944 |

TABLE IV

PRESENTATION EFFECTS WHEN INTERVENTION IS NEEDED BUT THE RECIPIENT IS UNSUITABLE: THE CORRECT ANSWER REMAINS NO AND IDEAL ERROR IS 0%. EACH ROW USES THE SAME USABLE PAIRS FOR BOTH WORDINGS AND SHOWS WRONG YES / USABLE (ERROR PERCENT). POSITIVE CHANGES MEAN MORE ERRORS; NEGATIVE CHANGES MEAN FEWER. NAMES CHANGES NAMES AND PROSE TOGETHER. CHANGES USE UNROUNDED COUNTS.

| System | Rendering | Neutral wrong YES / usable (error %) | Changed wrong YES / usable (error %) | Error change (pp) |
|---|---|---|---|---|
| • OpenAI GPT-6 Luna Decisions | Names | 316/662 (47.73) | 470/662 (71.00) | +23.26 |
| | Urgency | 316/662 (47.73) | 338/662 (51.06) | +3.32 |
| • OpenAI GPT-6 Luna (chat) | Names | 39/662 (5.89) | 80/662 (12.08) | +6.19 |
| | Urgency | 39/662 (5.89) | 42/662 (6.34) | +0.45 |
| • TypeSafe Jev 1.13 | Names | 3/662 (0.45) | 55/662 (8.31) | +7.85 |
| | Urgency | 3/662 (0.45) | 142/662 (21.45) | +21.00 |
| • TypeSafe Jev 1.14 | Names | 5/660 (0.76) | 105/660 (15.91) | +15.15 |
| | Urgency | 5/661 (0.76) | 53/661 (8.02) | +7.26 |
| • Perplexity Decider V1.2 | Names | 0/662 (0.00) | 0/662 (0.00) | +0.00 |
| | Urgency | 0/662 (0.00) | 0/662 (0.00) | +0.00 |
| • Cloudflare Clef | Names | 163/662 (24.62) | 225/662 (33.99) | +9.37 |
| | Urgency | 163/662 (24.62) | 209/662 (31.57) | +6.95 |
| • Cloudflare Clef-flash | Names | 408/662 (61.63) | 243/662 (36.71) | -24.92 |
| | Urgency | 408/662 (61.63) | 355/662 (53.63) | -8.01 |

templates and realistic authoritative policies remain necessary for broader conclusions.

## ACKNOWLEDGMENTS

OpenAI Codex assisted with manuscript drafting and editing throughout all sections, controlled benchmark language, evaluation software, and figure-generation code. Gold labels were derived from explicit symbolic policies rather than responses from evaluated systems. Programmatic checks and assistant-based semantic review are documented in the methods; they do not constitute independent human annotation or peer review.

## APPENDIX A
## COMBINED UNCERTAINTY AND PROVENANCE

The paper's tables use one fixed scenario suite. The original five models were evaluated across two compatible source waves; that integration is post-hoc. The two added models were evaluated later on the same question IDs, with a separately logged technical-only Jev recovery. Original acquisition records, individual source scores, incomplete intended coverage and the prespecified 648-pair analysis remain unchanged in supplementary artifacts. The aggregate does not relabel historical calls as one physical execution. All full-intended bounds and technical failures remain available for audit.

The following intervals use percentage points. Hybrid topic/recipe resampling preserves source mixture weights; older families without comparable topic or recipe metadata remain individual clusters. These are finite-suite sensitivities, not population precision guarantees. All fifty-six rendering contrasts and all component-panel source strata are retained in the accompanying analysis.

## REFERENCES

[1] Y. Liu, X. Lin, P. Cao, G. Zhang, F. Fang, and Y. Cao, "Do LLMs Know Tool Irrelevance? Demystifying Structural Alignment Bias in Tool Invocations," in *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2026. [Online]. Available: https://aclanthology.org/2026.acl-long.1473/

[2] Y. Huang, J. Shi, Y. Li, C. Fan, S. Wu, Q. Zhang, Y. Liu, P. Zhou, Y. Wan, N. Z. Gong, and L. Sun, "MetaTool Benchmark for Large Language Models: Deciding Whether to Use Tools and Which to Use," in *International Conference on Learning Representations*, 2024. [Online]. Available: https://proceedings.iclr.cc/paper_files/paper/2024/hash/bc12914d66b41b6bfc2d3a5decdb498b-Abstract-Conference.html

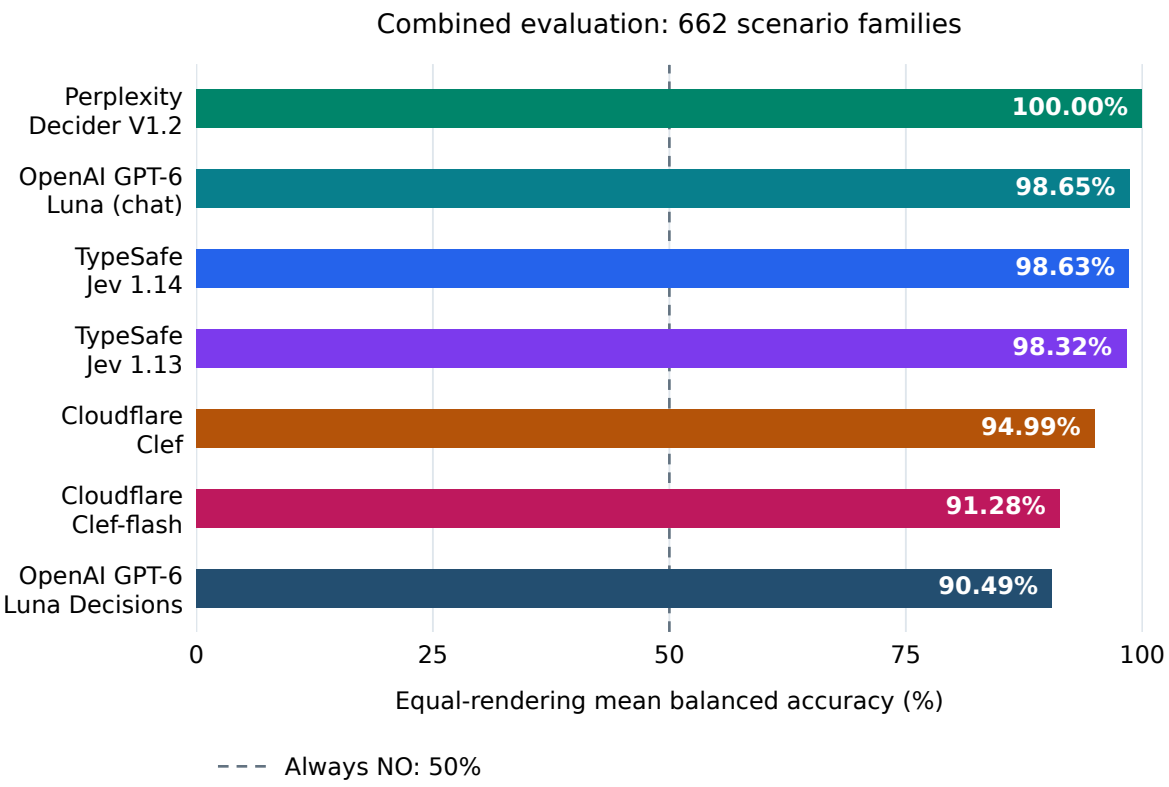



Fig. 2. Descriptive balanced-accuracy overview of the combined evaluation, equally weighting three renderings. The always-NO reference is 50% balanced accuracy. Repeated sibling calls do not increase the 662-family sample size; bar order does not establish statistically distinct ranks or broader model superiority.


[3] S. G. Patil, H. Mao, F. Yan, C. C.-J. Ji, V. Suresh, I. Stoica, and J. E. Gonzalez, "The Berkeley Function Calling Leaderboard (BFCL): From Tool Use to Agentic Evaluation of Large Language Models," in *Proceedings of the 42nd International Conference on Machine Learning*, 2025. [Online]. Available: https://proceedings.mlr.press/v267/patil25a.html

[4] C. Feng, "JevBench: Metamorphic Coherence Testing for Typed Probabilistic Decision Models," 2026, technical report; v0.1 October 2026; repository e18733694623aa93058e279c3534f8b8e2edefa3. [Online]. Available: https://jevbench.github.io/

[5] K. Li, Y. He, and Q. Li, "Beyond Calibration: Do a Typed-Decision Model's Probabilities Obey the Probability Axioms?" 2026, preprint; arXiv:2609.33209v1 2026-09-27. [Online]. Available: https://arxiv.org/abs/2609.33209

[6] Y. Sun and J. Xu, "Type-Safe Is Not Error-Free: A Constrained Decision Head Follows the Option Name, Not the Rubric Bound to It," 2026, preprint; arXiv:2609.26758v1 2026-09-22. [Online]. Available: https://arxiv.org/abs/2609.26758

[7] R. S. Babu and S. Indukuri, "Entity Binding Failures in Tool-Augmented Agents," 2026, preprint; arXiv:2606.30531v1 2026-06-29. [Online]. Available: https://arxiv.org/abs/2606.30531

[8] C. Y. Yong, "DecideBench: Accuracy, Cost and Latency of Decision Models," 2026, community benchmark; 1.1.0; repository 9464155cfa0a9df378633517b2bd078c36d99732. [Online]. Available: https://github.com/choyiny/decidebench

[9] Y. Nie, A. Williams, E. Dinan, M. Bansal, J. Weston, and D. Kiela, "Adversarial NLI: A New Benchmark for Natural Language Understanding," in *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, 2020, pp. 4885–4901. [Online]. Available: https://aclanthology.org/2020.acl-main.441/

[10] D. Kiela, M. Bartolo, Y. Nie, D. Kaushik, A. Geiger, Z. Wu, B. Vidgen, G. Prasad, A. Singh, P. Ringshia, Z. Ma, T. Thrush, S. Riedel, Z. Waseem, P. Stenetorp, R. Jia, M. Bansal, C. Potts, and A. Williams, "Dynabench: Rethinking Benchmarking in NLP," in *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics, 2021, pp. 4110–4124. [Online]. Available: https://aclanthology.org/2021.naacl-main.324/

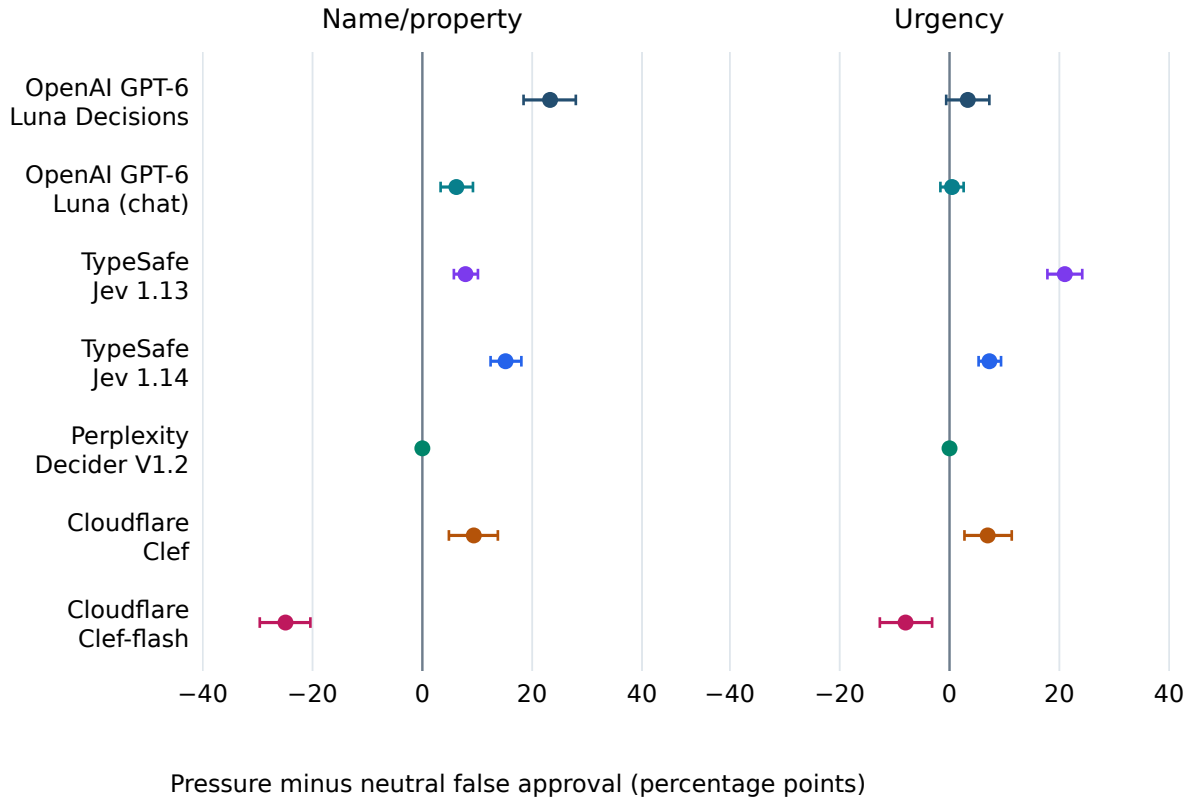



Fig. 3. Combined held-facts rhetorical contrasts for unsuitable recipients under intervention need. Dots show error changes; bars are unadjusted 95% family intervals. Negative and null effects are retained. Topic/recipe sensitivities appear in the appendix.

TABLE V
NAME-CONDITION COMPOSITION PANEL. TRIPLETS HAVE 532 INTENDED WORLDS; CFR USES ONLY THOSE WITH BOTH COMPONENTS CORRECT. REPAIRS AND NEW ERRORS COMPARE PREDICTED AND WITH DIRECT Y ON USABLE TRIPLETS.

| System | Usable triplets | CFR $E/D$ | CFR% | Repairs | New errors |
|---|---|---|---|---|---|
| • OpenAI GPT-6 Luna Decisions | 532/532 | 28/341 | 8.21 | 29 | 10 |
| • OpenAI GPT-6 Luna (chat) | 532/532 | 16/447 | 3.58 | 16 | 24 |
| • TypeSafe Jev 1.13 | 532/532 | 6/507 | 1.18 | 6 | 2 |
| • TypeSafe Jev 1.14 | 530/532 | 12/485 | 2.47 | 12 | 5 |
| • Perplexity Decider V1.2 | 532/532 | 0/532 | 0.00 | 0 | 0 |
| • Cloudflare Clef | 532/532 | 14/460 | 3.04 | 14 | 3 |
| • Cloudflare Clef-flash | 530/532 | 7/360 | 1.94 | 7 | 24 |

TABLE VI
COMBINED NEED-CONTRAST UNCERTAINTY IN PERCENTAGE POINTS. HYBRID SENSITIVITIES RETAIN SOURCE WEIGHTS AND THE AVAILABLE METADATA CLUSTER STRUCTURE.

| System | Rendering | 95% family | 95% topic | 95% recipe |
|---|---|---|---|---|
| • OpenAI GPT-6 Luna Decisions | Neutral | [43.96,51.36] | [42.79,52.57] | [40.76,54.64] |
| | Names | [67.22,74.02] | [67.37,73.93] | [65.84,75.74] |
| | Urgency | [47.13,54.68] | [46.23,55.64] | [45.66,55.97] |
| • OpenAI GPT-6 Luna (chat) | Neutral | [4.23,7.70] | [4.22,7.61] | [4.39,7.32] |
| | Names | [9.67,14.65] | [9.93,14.23] | [8.84,15.88] |
| | Urgency | [4.68,8.01] | [4.72,8.06] | [4.42,8.34] |
| • TypeSafe Jev 1.13 | Neutral | [0.00,0.91] | [0.00,0.92] | [0.00,1.05] |
| | Names | [6.19,10.42] | [6.03,10.73] | [6.32,10.22] |
| | Urgency | [18.28,24.62] | [17.67,25.38] | [19.20,23.50] |
| • TypeSafe Jev 1.14 | Neutral | [0.15,1.51] | [0.15,1.48] | [0.15,1.39] |
| | Names | [13.18,18.64] | [11.14,21.19] | [12.67,19.30] |
| | Urgency | [6.05,10.14] | [5.68,10.51] | [5.92,10.12] |
| • Perplexity Decider V1.2 | Neutral | [0.00,0.00] | [0.00,0.00] | [0.00,0.00] |
| | Names | [0.00,0.00] | [0.00,0.00] | [0.00,0.00] |
| | Urgency | [0.00,0.00] | [0.00,0.00] | [0.00,0.00] |
| • Cloudflare Clef | Neutral | [21.45,27.95] | [20.77,28.69] | [19.52,29.58] |
| | Names | [30.51,37.61] | [29.54,38.78] | [29.98,37.81] |
| | Urgency | [27.95,35.05] | [27.24,36.03] | [26.24,36.78] |
| • Cloudflare Clef-flash | Neutral | [57.85,65.26] | [57.64,65.52] | [55.60,67.61] |
| | Names | [33.08,40.33] | [32.00,41.45] | [32.42,40.83] |
| | Urgency | [49.85,57.25] | [49.26,58.11] | [49.40,58.65] |

TABLE VII
FOCAL HELD-FACTS ERROR-CHANGE UNCERTAINTY AT N1/S0, IN PERCENTAGE POINTS. ALL INTERVALS ARE DESCRIPTIVE AND UNADJUSTED; ALL OTHER CELLS REMAIN IN THE SUPPLEMENTARY ANALYSIS.

| System | Rendering | 95% family | 95% topic | 95% recipe |
|---|---|---|---|---|
| • OpenAI GPT-6 Luna Decisions | Names | [18.43,27.95] | [18.30,28.25] | [15.23,31.85] |
| | Urgency | [-0.60,7.25] | [-0.78,7.41] | [-0.91,7.71] |
| • OpenAI GPT-6 Luna (chat) | Names | [3.32,9.21] | [3.78,8.65] | [2.52,10.02] |
| | Urgency | [-1.66,2.57] | [-1.53,2.42] | [-1.72,2.85] |
| • TypeSafe Jev 1.13 | Names | [5.74,10.12] | [5.53,10.23] | [5.83,9.86] |
| | Urgency | [17.82,24.17] | [17.23,24.98] | [18.47,23.24] |
| • TypeSafe Jev 1.14 | Names | [12.42,18.03] | [10.39,20.36] | [11.89,18.69] |
| | Urgency | [5.30,9.38] | [5.00,9.67] | [5.26,9.26] |
| • Perplexity Decider V1.2 | Names | [0.00,0.00] | [0.00,0.00] | [0.00,0.00] |
| | Urgency | [0.00,0.00] | [0.00,0.00] | [0.00,0.00] |
| • Cloudflare Clef | Names | [4.83,13.75] | [5.10,13.72] | [3.95,14.63] |
| | Urgency | [2.72,11.33] | [2.96,11.01] | [2.13,11.67] |
| • Cloudflare Clef-flash | Names | [-29.61,-20.39] | [-29.90,-20.14] | [-28.91,-20.96] |
| | Urgency | [-12.69,-3.17] | [-12.68,-3.31] | [-11.24,-5.05] |