xqmac8 / xqmac8u: dense dot product

`xqmac8u rd, rs1, rs2`

`rd += Σ(i=0..7) u8(rs1.b[i]) × s8(rs2.b[i])`

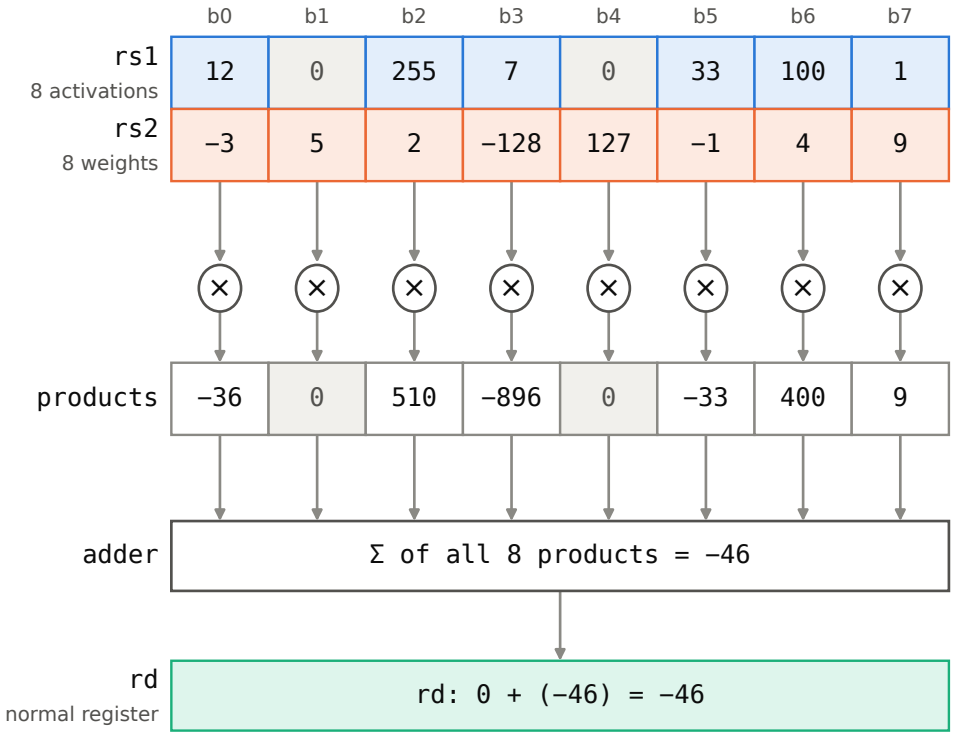

8 inputs → 1 output

Every activation is multiplied, including zeros (grey).

Uses only x0–x31. xqmac8 is the same with signed activations.

xsqmac8: sparse outer product

`xsqmac8 g, rs1, rs2`

`ACC[g][i] += u8(rs1[7:0]) × s8(rs2.b[i]),  i = 0..7`

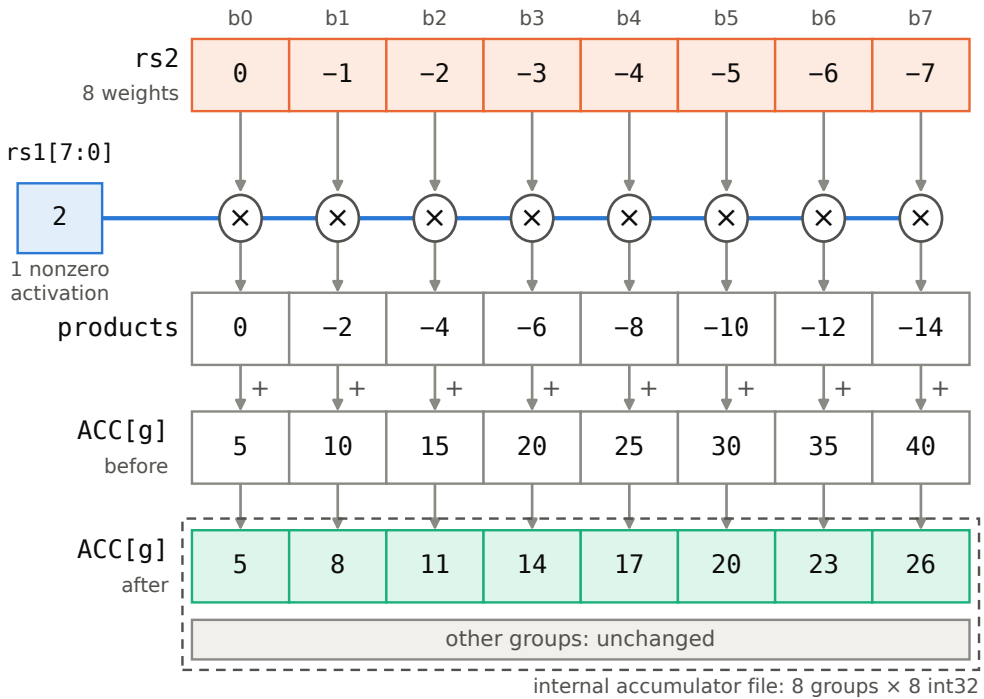

1 input → 8 outputs

Zero activations are not in the list, so they cost nothing.

No register is written. xsaccrd reads each result back.