

# Introduction to Computer Systems

## Lecture 9 – Machine-Level Programming V: Advanced Topics

2022 Spring, CSE3030

Sogang University




# Today

- Memory Layout
- Buffer Overflow
  - Vulnerability
  - Protection
- Unions

# x86-64 Linux Memory Layout

*not drawn to scale*

- Stack
  - Runtime stack (8MB limit)
  - E. g., local variables
- Heap
  - Dynamically allocated as needed
  - When call `malloc()`, `calloc()`, `new()`
- Data
  - Statically allocated data
  - E.g., global vars, `static` vars, string constants
- Text / Shared Libraries
  - Executable machine instructions
  - Read-only

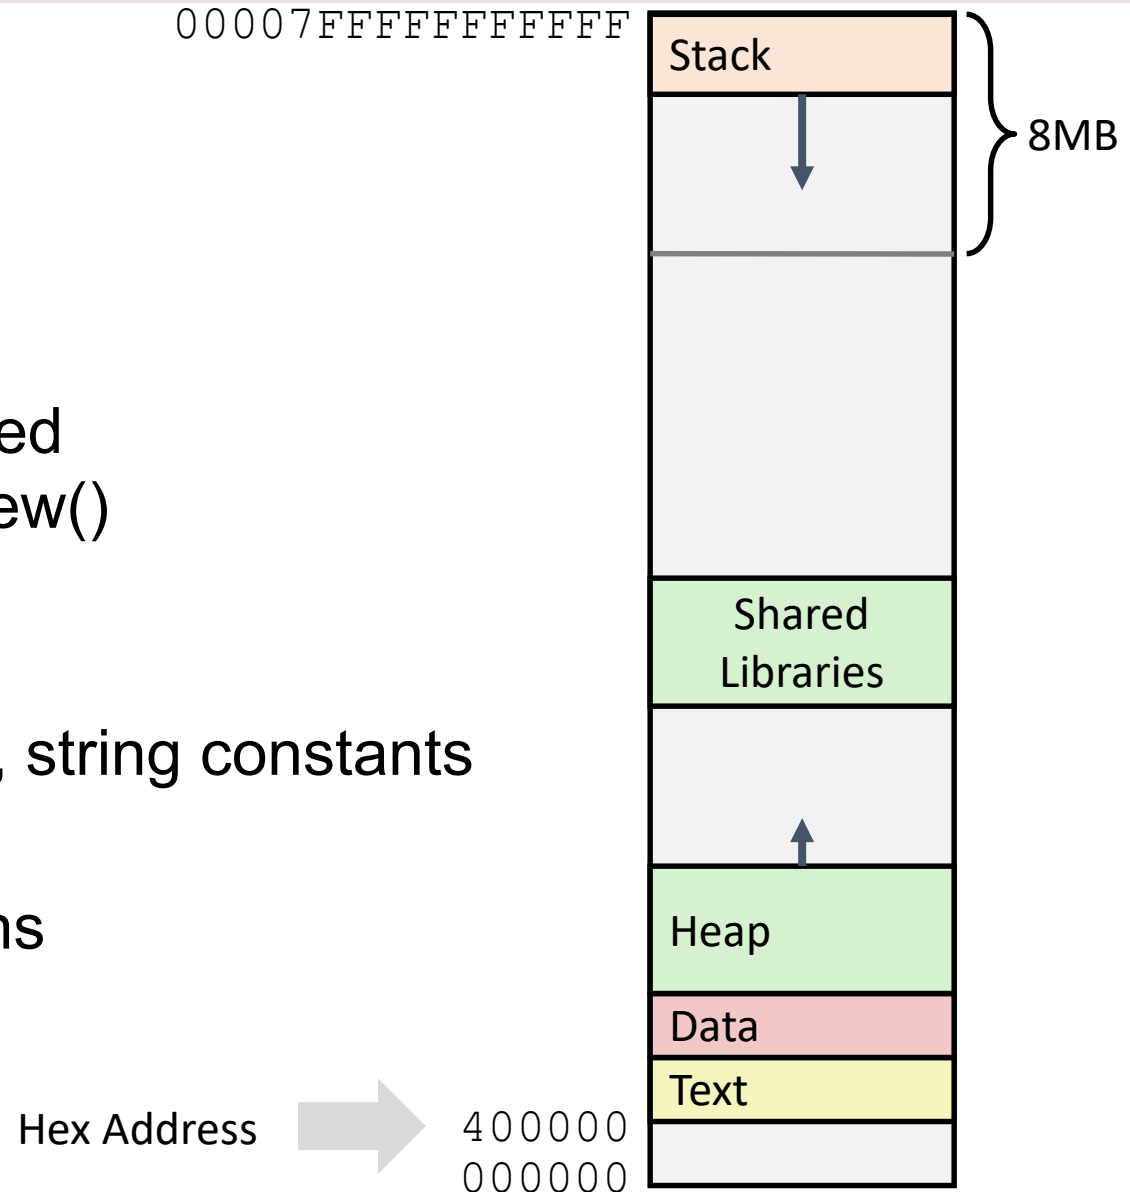

# Memory Allocation Example

*not drawn to scale*


```
char big_array[1L<<24]; /* 16 MB */
char huge_array[1L<<31]; /* 2 GB */

int global = 0;

int useless() { return 0; }

int main ()
{
    void *p1, *p2, *p3, *p4;
    int local = 0;
    p1 = malloc(1L << 28); /* 256 MB */
    p2 = malloc(1L << 8); /* 256 B */
    p3 = malloc(1L << 32); /* 4 GB */
    p4 = malloc(1L << 8); /* 256 B */
    /* Some print statements ... */
}
```

*Where does everything go?*

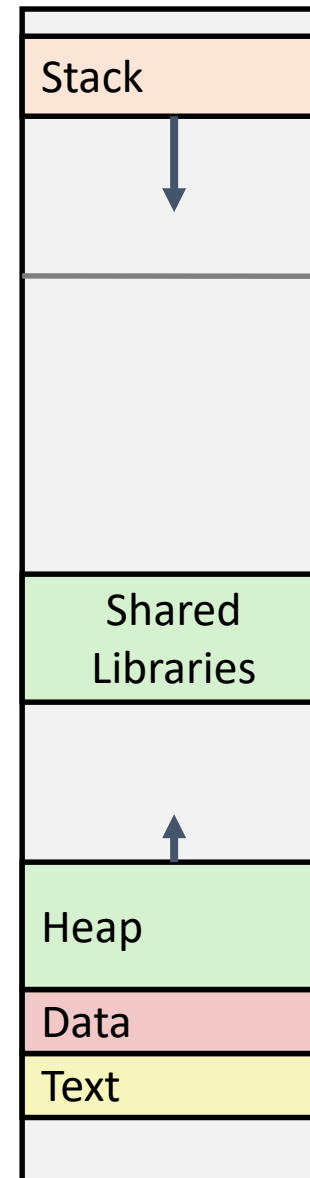


# x86-64 Example Addresses

*not drawn to scale*

*address range  $\sim 2^{47}$*

```
local
p1
p3
p4
p2
big_array
huge_array
main()
useless()
```

```
0x00007ffe4d3be87c
0x00007f7262a1e010
0x00007f7162a1d010
0x000000008359d120
0x000000008359d010
0x0000000080601060
0x0000000000601060
0x000000000040060c
0x0000000000400590
```

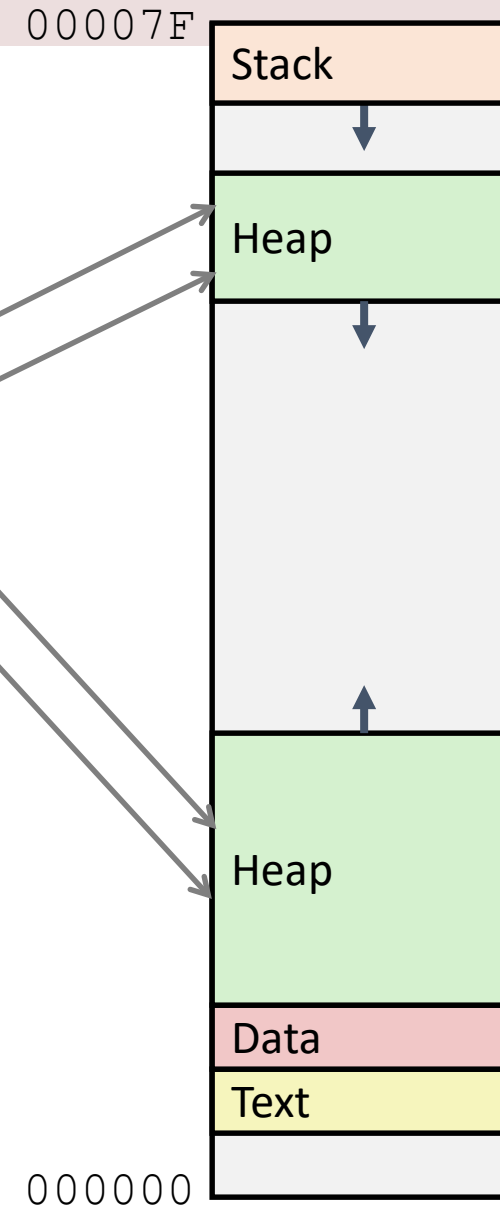

# Today

- Memory Layout
- Buffer Overflow
  - Vulnerability
  - Protection
- Unions

# Recall: Memory Referencing Bug Example

```
typedef struct {  
    int a[2];  
    double d;  
} struct_t;  
  
double fun(int i) {  
    volatile struct_t s;  
    s.d = 3.14;  
    s.a[i] = 1073741824; /* Possibly out of bounds */  
    return s.d;  
}
```

fun(0)	=	3.14
fun(1)	=	3.14
fun(2)	=	3.1399998664856
fun(3)	=	2.00000061035156
fun(4)	=	3.14
fun(6)	=	Segmentation fault


- Result is system specific

# Memory Referencing Bug Example

```
typedef struct {  
    int a[2];  
    double d;  
} struct_t;
```

fun(0)	=	3.14
fun(1)	=	3.14
fun(2)	=	3.1399998664856
fun(3)	=	2.00000061035156
fun(4)	=	3.14
fun(6)	=	Segmentation fault

## Explanation:

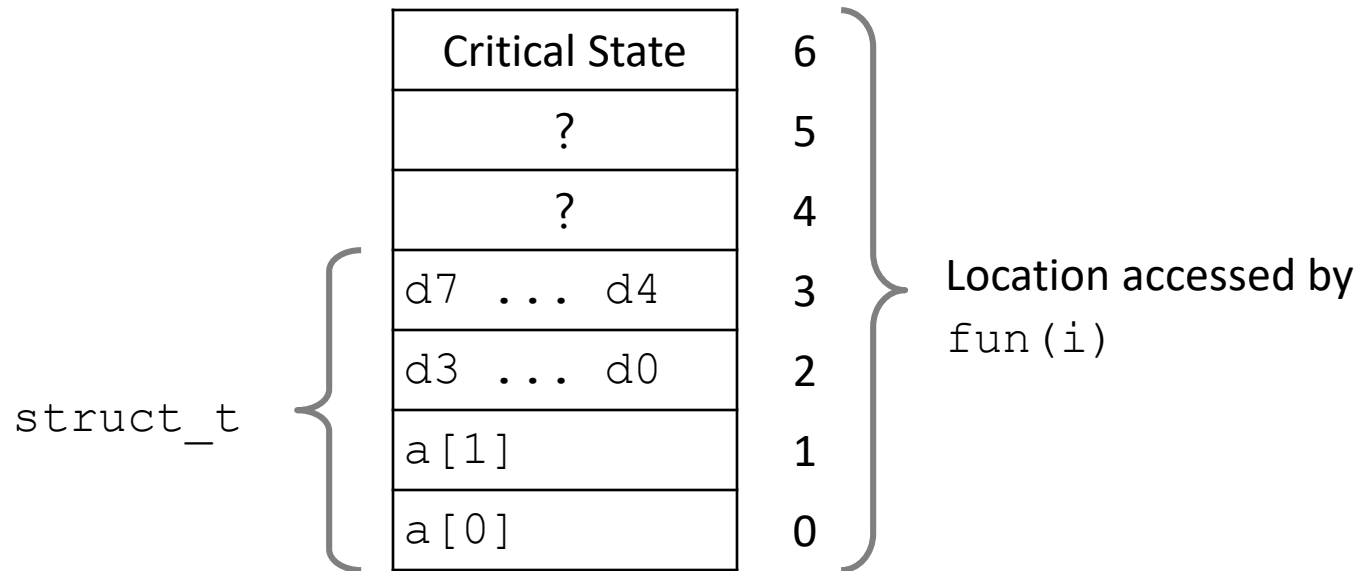



# Such problems are a BIG deal

- Generally called a “buffer overflow”
  - when exceeding the memory size allocated for an array
- Why a big deal?
  - It's the #1 technical cause of security vulnerabilities
    - #1 overall cause is social engineering / user ignorance
- Most common form
  - Unchecked lengths on string inputs
  - Particularly for bounded character arrays on the stack
    - sometimes referred to as stack smashing

# String Library Code

- Implementation of Unix function `gets()`

```
/* Get string from stdin */
char *gets(char *dest)
{
    int c = getchar();
    char *p = dest;
    while (c != EOF && c != '\n') {
        *p++ = c;
        c = getchar();
    }
    *p = '\0';
    return dest;
}
```

- No way to specify limit on number of characters to read
- Similar problems with other library functions
  - **strcpy, strcat**: Copy strings of arbitrary length
  - **scanf, fscanf, sscanf**, when given **%s** conversion specification

# Vulnerable Buffer Code

```
/* Echo Line */  
void echo()  
{  
    char buf[4]; /* Way too small! */  
    gets(buf);  
    puts(buf);  
}
```

```
void call_echo() {  
    echo();  
}
```

← btw, how big  
is big enough?

```
unix>./bufdemo-nsp  
Type a string:012345678901234567890123  
012345678901234567890123
```

```
unix>./bufdemo-nsp  
Type a string:0123456789012345678901234  
Segmentation Fault
```

# Buffer Overflow Disassembly

echo:


```
00000000004006cf <echo>:
 4006cf: 48 83 ec 18          sub     $0x18,%rsp
 4006d3: 48 89 e7            mov     %rsp,%rdi
 4006d6: e8 a5 ff ff ff     callq  400680 <gets>
 4006db: 48 89 e7            mov     %rsp,%rdi
 4006de: e8 3d fe ff ff     callq  400520 <puts@plt>
 4006e3: 48 83 c4 18          add     $0x18,%rsp
 4006e7: c3                  retq
```

call\_echo:

```
4006e8: 48 83 ec 08          sub     $0x8,%rsp
 4006ec: b8 00 00 00 00      mov     $0x0,%eax
 4006f1: e8 d9 ff ff ff     callq  4006cf <echo>
 4006f6: 48 83 c4 08          add     $0x8,%rsp
 4006fa: c3                  retq
```

# Buffer Overflow Stack

*Before call to gets*

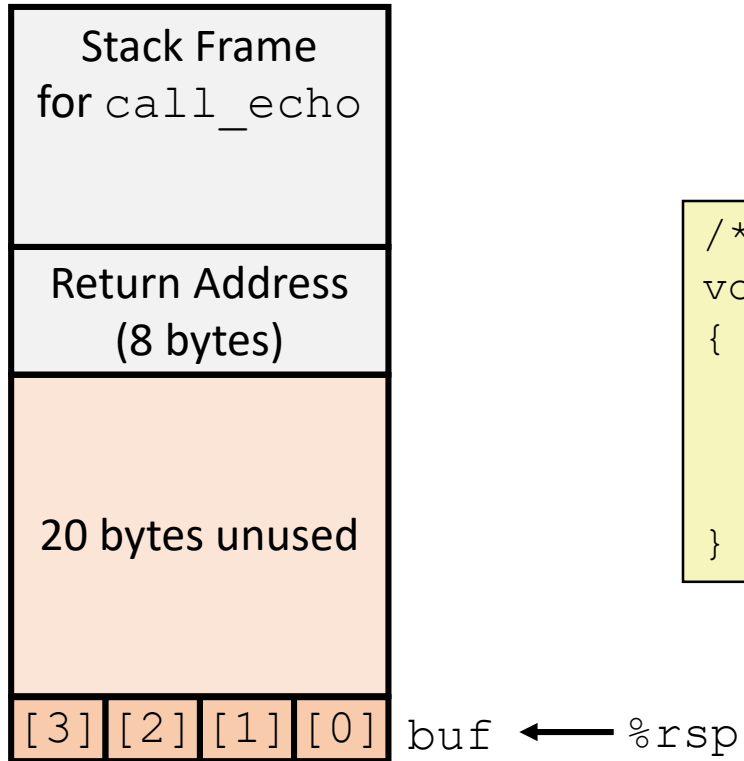


```
/* Echo Line */  
void echo()  
{  
    char buf[4]; /* Way too small! */  
    gets(buf);  
    puts(buf);  
}
```

```
echo:  
    subq    $24, %rsp  
    movq    %rsp, %rdi  
    call    gets  
    . . .
```

# Buffer Overflow Stack Example

*Before call to gets*

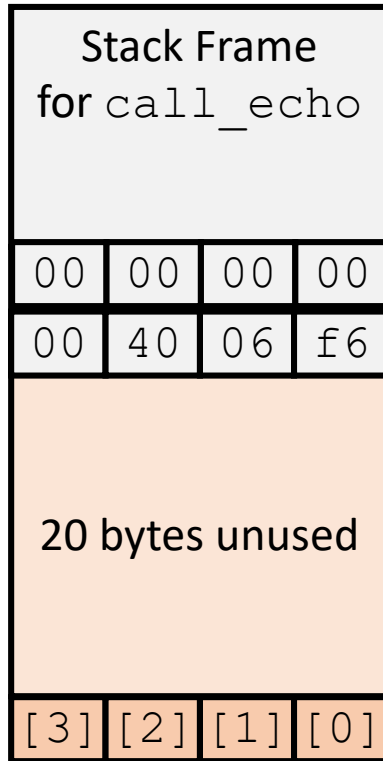

```
void echo()  
{  
    char buf[4];  
    gets(buf);  
    . . .  
}
```

```
echo:  
    subq    $24, %rsp  
    movq    %rsp, %rdi  
    call    gets  
    . . .
```

call\_echo:

```
. . .  
4006f1:  callq    4006cf <echo>  
4006f6:  add      $0x8, %rsp  
. . .
```

# Buffer Overflow Stack Example #1

After call to gets

Stack Frame for call_echo			
00	00	00	00
00	40	06	f6
00	32	31	30
39	38	37	36
35	34	33	32
31	30	39	38
37	36	35	34
33	32	31	30

```
void echo()  
{  
    char buf[4];  
    gets(buf);  
    . . .  
}
```

```
echo:  
    subq    $24, %rsp  
    movq    %rsp, %rdi  
    call    gets  
    . . .
```

call\_echo:

```
. . .  
4006f1:  callq    4006cf <echo>  
4006f6:  add      $0x8, %rsp  
. . .
```

buf ← %rsp

```
unix> ./bufdemo-nsp  
Type a string: 01234567890123456789012  
01234567890123456789012
```

Overflowed buffer, but did not corrupt state

# Buffer Overflow Stack Example #2

After call to gets

Stack Frame for call_echo			
00	00	00	00
00	40	00	34
33	32	31	30
39	38	37	36
35	34	33	32
31	30	39	38
37	36	35	34
33	32	31	30

```
void echo()  
{  
    char buf[4];  
    gets(buf);  
    . . .  
}
```

```
echo:  
    subq    $24, %rsp  
    movq    %rsp, %rdi  
    call    gets  
    . . .
```

call\_echo:

```
. . .  
4006f1:  callq    4006cf <echo>  
4006f6:  add      $0x8, %rsp  
. . .
```

buf ← %rsp

```
unix> ./bufdemo-nsp  
Type a string: 0123456789012345678901234  
Segmentation Fault
```

Overflowed buffer and corrupted return pointer



# Buffer Overflow Stack Example #3

After call to gets

Stack Frame for call_echo			
00	00	00	00
00	40	06	00
33	32	31	30
39	38	37	36
35	34	33	32
31	30	39	38
37	36	35	34
33	32	31	30

```
void echo()  
{  
    char buf[4];  
    gets(buf);  
    . . .  
}
```

```
echo:  
    subq    $24, %rsp  
    movq    %rsp, %rdi  
    call    gets  
    . . .
```

call\_echo:

```
. . .  
4006f1:  callq    4006cf <echo>  
4006f6:  add      $0x8, %rsp  
. . .
```

buf ← %rsp

```
unix> ./bufdemo-nsp  
Type a string: 012345678901234567890123  
012345678901234567890123
```

Overflowed buffer, corrupted return pointer, but program seems to work!

# Buffer Overflow Stack Example #3 Explained

*After call to gets*

Stack Frame for call_echo			
00	00	00	00
00	40	06	00
33	32	31	30
39	38	37	36
35	34	33	32
31	30	39	38
37	36	35	34
33	32	31	30

register\_tm\_clones:

```
. . .  
400600:  mov    %rsp,%rbp  
400603:  mov    %rax,%rdx  
400606:  shr    $0x3f,%rdx  
40060a:  add    %rdx,%rax  
40060d:  sar    %rax  
400610:  jne    400614  
400612:  pop    %rbp  
400613:  retq
```


buf ← %rsp

“Returns” to unrelated code

Lots of things happen, without modifying critical state

Eventually executes `retq` back to `main`

# Code Injection Attacks

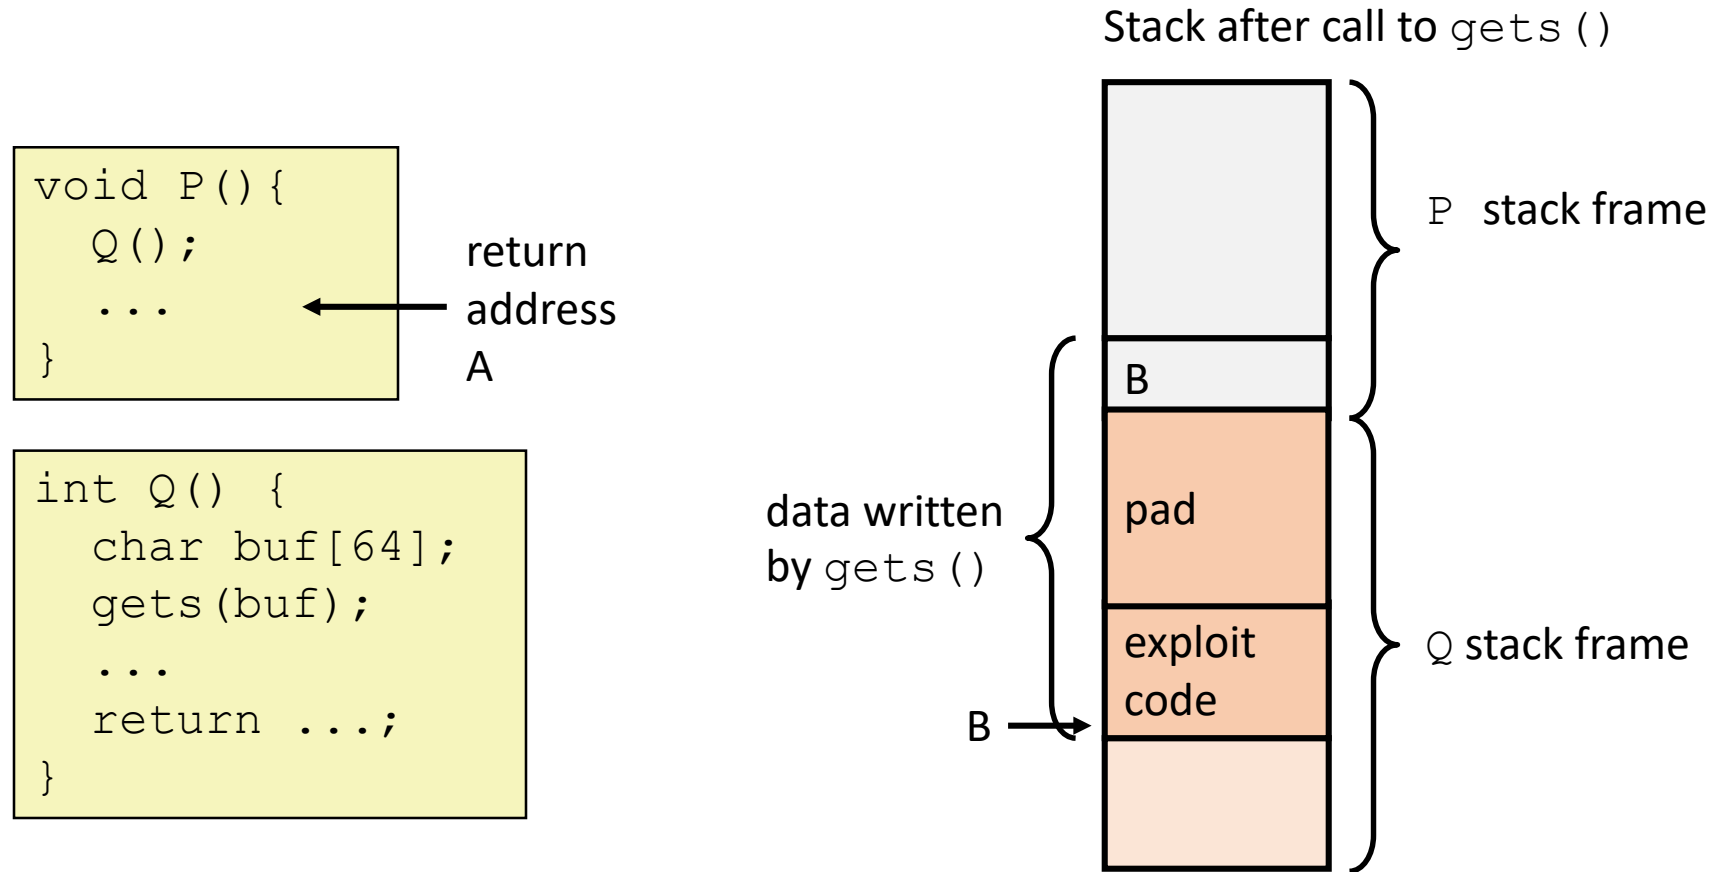

- Input string contains byte representation of executable code
- Overwrite return address A with address of buffer B
- When Q executes `ret`, will jump to exploit code

# Exploits Based on Buffer Overflows


- *Buffer overflow bugs can allow remote machines to execute arbitrary code on victim machines*
- Distressingly common in real programs
  - Programmers keep making the same mistakes ☹
  - Recent measures make these attacks much more difficult
- Examples across the decades
  - Original “Internet worm” (1988)
  - “IM wars” (1999)
  - Twilight hack on Wii (2000s)
  - ... and many, many more

# Example: the original Internet worm (1988)

- Exploited a few vulnerabilities to spread
  - Early versions of the finger server (fingerd) used `gets()` to read the argument sent by the client:
    - `finger droh@cs.cmu.edu`
  - Worm attacked fingerd server by sending phony argument:
    - `finger "exploit-code padding new-return-address"`
    - exploit code: executed a root shell on the victim machine with a direct TCP connection to the attacker.
- Once on a machine, scanned for other machines to attack
  - invaded ~6000 computers in hours (10% of the Internet 😊 )
    - see June 1989 article in *Comm. of the ACM*
  - the young author of the worm was prosecuted...
  - and CERT was formed... still homed at CMU

# Example 2: IM War

- July, 1999
  - Microsoft launches MSN Messenger (instant messaging system).
  - Messenger clients can access popular AOL Instant Messaging Service (AIM) servers

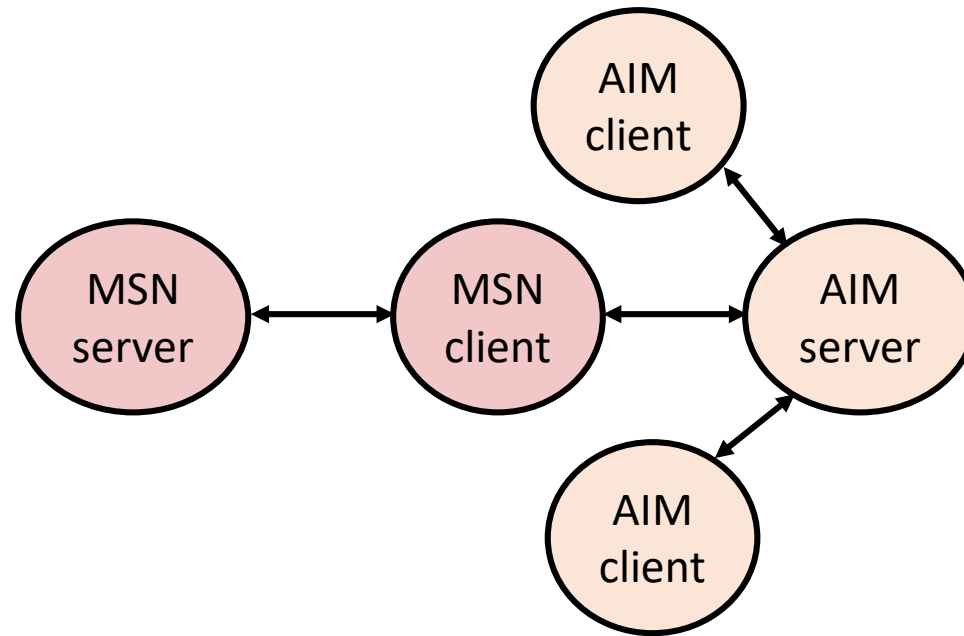

# IM War (cont.)

- August 1999
  - Mysteriously, Messenger clients can no longer access AIM servers
  - Microsoft and AOL begin the IM war:
    - AOL changes server to disallow Messenger clients
    - Microsoft makes changes to clients to defeat AOL changes
    - At least 13 such skirmishes
  - What was really happening?
    - AOL had discovered a buffer overflow bug in their own AIM clients
    - They exploited it to detect and block Microsoft: the exploit code returned a 4-byte signature (the bytes at some location in the AIM client) to server
    - When Microsoft changed code to match signature, AOL changed signature location

Date: Wed, 11 Aug 1999 11:30:57 -0700 (PDT)  
From: Phil Bucking <philbucking@yahoo.com>  
Subject: AOL exploiting buffer overrun bug in their own software!  
To: rms@pharlap.com

Mr. Smith,

I am writing you because I have discovered something that I think you might find interesting because you are an Internet security expert with experience in this area. I have also tried to contact AOL but received no response.

I am a developer who has been working on a revolutionary new instant messaging client that should be released later this year.

...

It appears that the AIM client has a buffer overrun bug. By itself this might not be the end of the world, as MS surely has had its share. But AOL is now \*exploiting their own buffer overrun bug\* to help in its efforts to block MS Instant Messenger.

....

Since you have significant credibility with the press I hope that you can use this information to help inform people that behind AOL's friendly exterior they are nefariously compromising peoples' security.

Sincerely,  
Phil Bucking  
Founder, Bucking Consulting  
philbucking@yahoo.com

*It was later determined that this email originated from within Microsoft!*



# Aside: Worms and Viruses

- Worm: A program that
  - Can run by itself
  - Can propagate a fully working version of itself to other computers
- Virus: Code that
  - Adds itself to other programs
  - Does not run independently
- Both are (usually) designed to spread among computers and to wreak havoc

# OK, what to do about buffer overflow attacks

- Avoid overflow vulnerabilities
- Employ system-level protections
- Have compiler use “stack canaries”
- Lets talk about each...

# 1. Avoid Overflow Vulnerabilities in Code (!)


```
/* Echo Line */  
void echo()  
{  
    char buf[4]; /* Way too small! */  
    fgets(buf, 4, stdin);  
    puts(buf);  
}
```

- For example, use library routines that limit string lengths
  - **fgets** instead of **gets**
  - **strncpy** instead of **strcpy**
  - Don't use **scanf** with **%s** conversion specification
    - Use **fgets** to read the string
    - Or use **%ns** where **n** is a suitable integer

## 2. System-Level Protections can help


- Randomized stack offsets
  - At start of program, allocate random amount of space on stack
  - Shifts stack addresses for entire program
  - Makes it difficult for hacker to predict beginning of inserted code
  - E.g.: 5 executions of memory allocation code
    - Stack repositioned each time program executes

local      0x7ffe4d3be87c    0x7fff75a4f9fc    0x7ffeadb7c80c    0x7ffeaea2fdac    0x7ffcd452017c

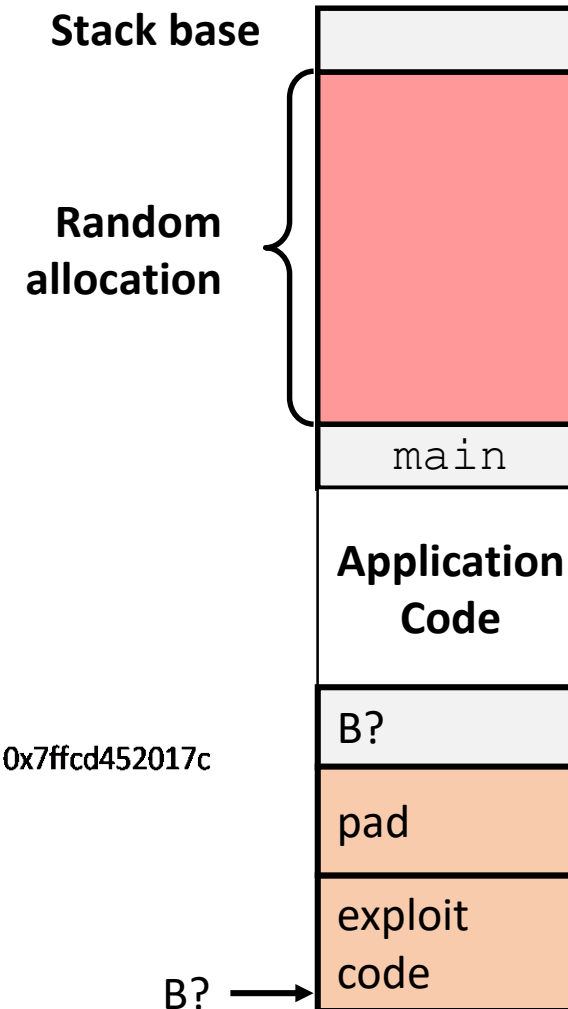

## 2. System-Level Protections can help

- Nonexecutable code segments
  - In traditional x86, can mark region of memory as either “read-only” or “writable”
    - Can execute anything readable
  - X86-64 added explicit “execute” permission
  - Stack marked as non-executable

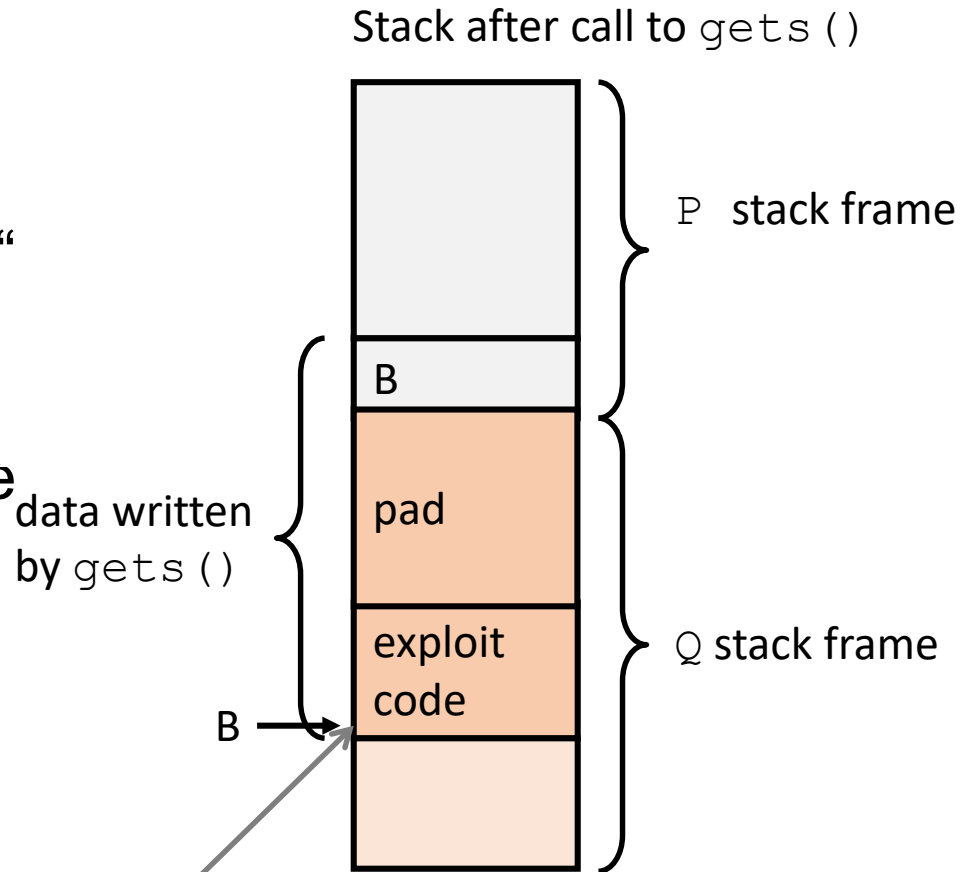

Any attempt to execute this code will fail

# 3. Stack Canaries can help

- Idea
  - Place special value (“canary”) on stack just beyond buffer
  - Check for corruption before exiting function
- GCC Implementation
  - **-fstack-protector**
  - Now the default (disabled earlier)

```
unix> ./bufdemo-sp  
Type a string: 0123456  
0123456
```

```
unix> ./bufdemo-sp  
Type a string: 01234567  
*** stack smashing detected ***
```


# Protected Buffer Disassembly

echo:

```
40072f:  sub    $0x18,%rsp
400733:  mov    %fs:0x28,%rax
40073c:  mov    %rax,0x8(%rsp)
400741:  xor    %eax,%eax
400743:  mov    %rsp,%rdi
400746:  callq  4006e0 <gets>
40074b:  mov    %rsp,%rdi
40074e:  callq  400570 <puts@plt>
400753:  mov    0x8(%rsp),%rax
400758:  xor    %fs:0x28,%rax
400761:  je     400768 <echo+0x39>
400763:  callq  400580 <__stack_chk_fail@plt>
400768:  add    $0x18,%rsp
40076c:  retq
```

# Setting Up Canary

*Before call to gets*

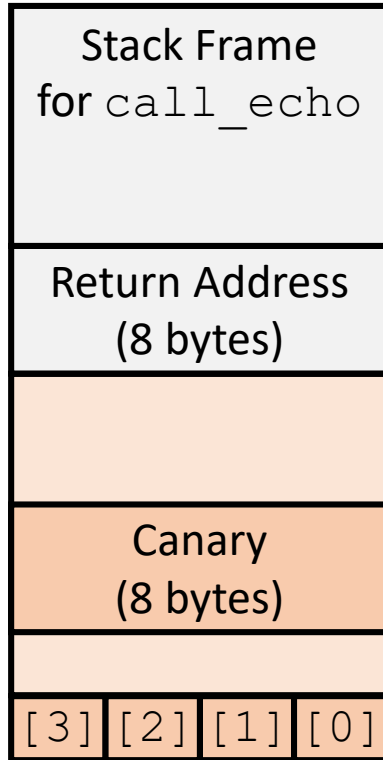

buf ← %rsp

```
/* Echo Line */  
void echo()  
{  
    char buf[4]; /* Way too small! */  
    gets(buf);  
    puts(buf);  
}
```

```
echo:  
    . . .  
    movq    %fs:40, %rax    # Get canary  
    movq    %rax, 8(%rsp)  # Place on stack  
    xorl    %eax, %eax     # Erase canary  
    . . .
```



# Checking Canary

*After call to gets*

Stack Frame for call_echo			
Return Address (8 bytes)			
Canary (8 bytes)			
00	36	35	34
33	32	31	30

```
/* Echo Line */  
void echo()  
{  
    char buf[4]; /* Way too small! */  
    gets(buf);  
    puts(buf);  
}
```

Input: 0123456

buf ← %rsp

```
echo:  
    . . .  
    movq    8(%rsp), %rax    # Retrieve from stack  
    xorq    %fs:40, %rax    # Compare to canary  
    je      .L6              # If same, OK  
    call    __stack_chk_fail # FAIL
```

# Return-Oriented Programming Attacks

- Challenge (for hackers)
  - Stack randomization makes it hard to predict buffer location
  - Marking stack nonexecutable makes it hard to insert binary code
- Alternative Strategy
  - Use existing code
    - E.g., library code from `stdlib`
  - String together fragments to achieve overall desired outcome
  - *Does not overcome stack canaries*
- Construct program from *gadgets*
  - Sequence of instructions ending in `ret`
    - Encoded by single byte `0xc3`
  - Code positions fixed from run to run
  - Code is executable

# Gadget Example #1

```
long ab_plus_c  
    (long a, long b, long c)  
{  
    return a*b + c;  
}
```

```
00000000004004d0 <ab_plus_c>:  
4004d0: 48 0f af fe  imul %rsi,%rdi  
4004d4: 48 8d 04 17  lea (%rdi,%rdx,1),%rax  
4004d8: c3           retq
```

$\text{rax} \leftarrow \text{rdi} + \text{rdx}$

Gadget address = 0x4004d4

- Use tail end of existing functions

# Gadget Example #2

```
void setval(unsigned *p) {  
    *p = 3347663060u;  
}
```

<setval>:  
4004d9: c7 07 d4 48 89 c7 movl \$0xc78948d4, (%rdi)  
4004df: c3 retq


Encodes `movq %rax, %rdi`

`rdi ← rax`

Gadget address = 0x4004dc

- Repurpose byte codes

# ROP Execution

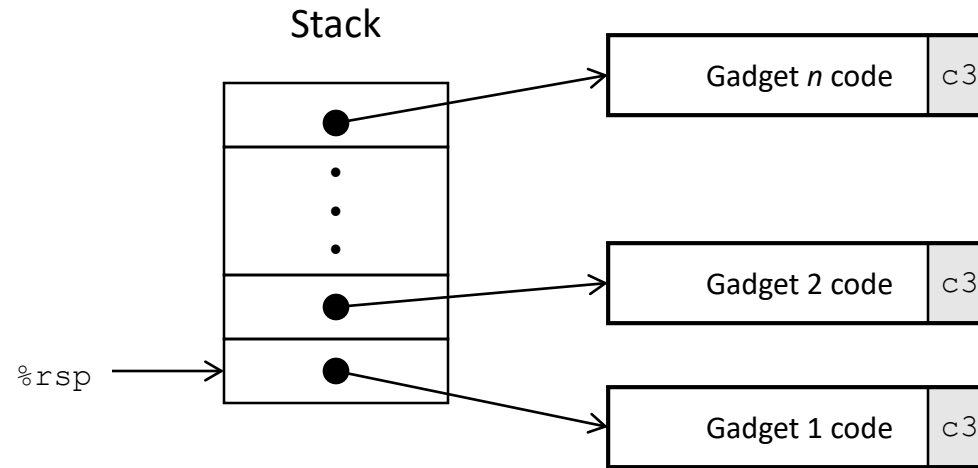

- Trigger with `ret` instruction
  - Will start executing Gadget 1
- Final `ret` in each gadget will start next one

# Today



- Memory Layout
- Buffer Overflow
  - Vulnerability
  - Protection
- Unions

# Union Allocation

- Allocate according to largest element
- Can only use one field at a time


```
union U1 {  
    char c;  
    int i[2];  
    double v;  
} *up;
```

```
struct S1 {  
    char c;  
    int i[2];  
    double v;  
} *sp;
```

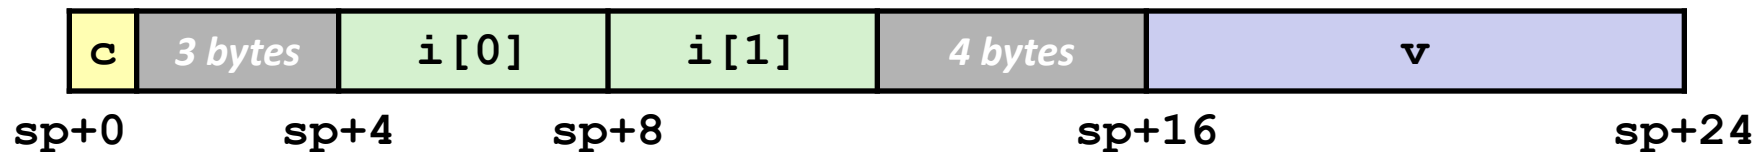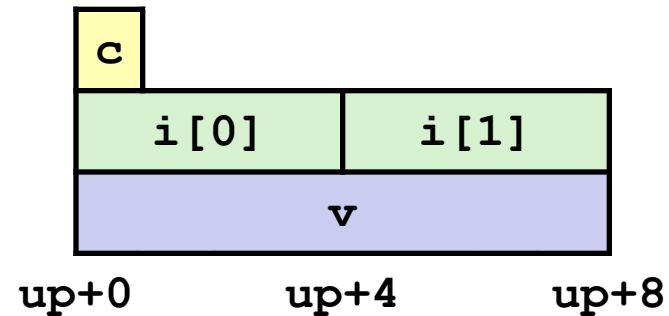

# Using Union to Access Bit Patterns

```
typedef union {  
    float f;  
    unsigned u;  
} bit_float_t;
```



```
float bit2float(unsigned u)  
{  
    bit_float_t arg;  
    arg.u = u;  
    return arg.f;  
}
```

Same as (float) u ?

```
unsigned float2bit(float f)  
{  
    bit_float_t arg;  
    arg.f = f;  
    return arg.u;  
}
```

Same as (unsigned) f ?



# Byte Ordering Revisited

- Idea
  - Short/long/quad words stored in memory as 2/4/8 consecutive bytes
  - Which byte is most (least) significant?
  - Can cause problems when exchanging binary data between machines
- Big Endian
  - Most significant byte has lowest address
  - Sparc
- Little Endian
  - Least significant byte has lowest address
  - Intel x86, ARM Android and IOS
- Bi Endian
  - Can be configured either way
  - ARM

# Byte Ordering Example

```
union {
    unsigned char c[8];
    unsigned short s[4];
    unsigned int i[2];
    unsigned long l[1];
} dw;
```

32-bit	c[0]	c[1]	c[2]	c[3]	c[4]	c[5]	c[6]	c[7]
	s[0]		s[1]		s[2]		s[3]	
	i[0]				i[1]			
	l[0]							

64-bit	c[0]	c[1]	c[2]	c[3]	c[4]	c[5]	c[6]	c[7]
	s[0]		s[1]		s[2]		s[3]	
	i[0]				i[1]			
	l[0]							

# Byte Ordering Example (Cont).

```
int j;
for (j = 0; j < 8; j++)
    dw.c[j] = 0xf0 + j;

printf("Characters 0-7 == [0x%x,0x%x,0x%x,0x%x,0x%x,0x%x,0x%x,0x%x]\n",
       dw.c[0], dw.c[1], dw.c[2], dw.c[3],
       dw.c[4], dw.c[5], dw.c[6], dw.c[7]);

printf("Shorts 0-3 == [0x%x,0x%x,0x%x,0x%x]\n",
       dw.s[0], dw.s[1], dw.s[2], dw.s[3]);

printf("Ints 0-1 == [0x%x,0x%x]\n",
       dw.i[0], dw.i[1]);

printf("Long 0 == [0x%lx]\n",
       dw.l[0]);
```

# Byte Ordering on IA32

## Little Endian

f0	f1	f2	f3	f4	f5	f6	f7
c[0]	c[1]	c[2]	c[3]	c[4]	c[5]	c[6]	c[7]
s[0]		s[1]		s[2]		s[3]	
i[0]				i[1]			
l[0]							


LSB ← Print → MSB      LSB      MSB

## Output:

Characters	0-7	==	[0xf0,0xf1,0xf2,0xf3,0xf4,0xf5,0xf6,0xf7]
Shorts	0-3	==	[0xf1f0,0xf3f2,0xf5f4,0xf7f6]
Ints	0-1	==	[0xf3f2f1f0,0xf7f6f5f4]
Long	0	==	[0xf3f2f1f0]

# Byte Ordering on Sun

## Big Endian

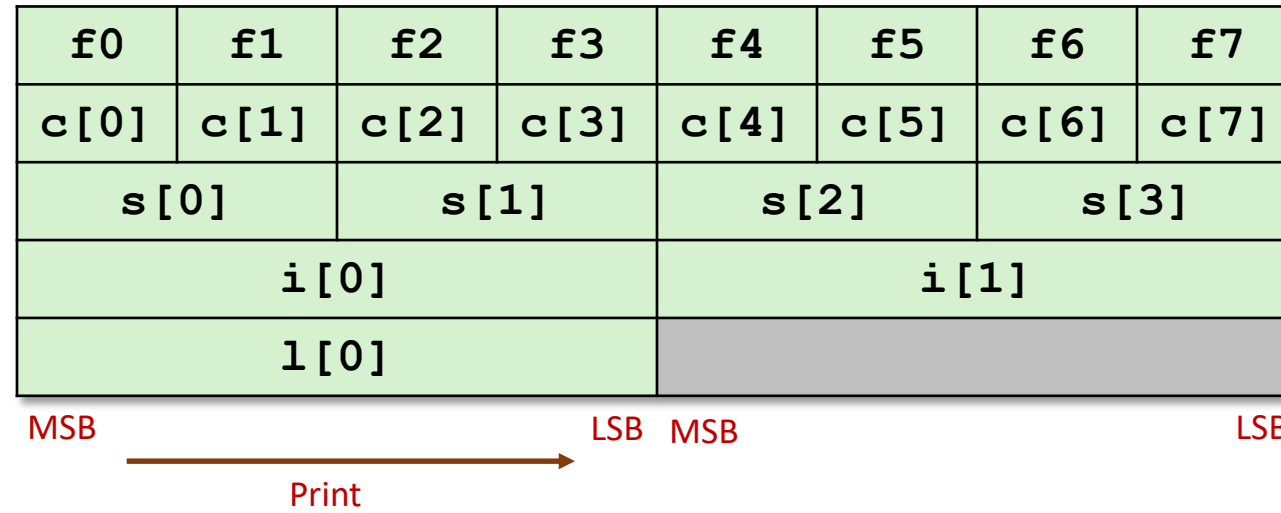


## Output on Sun:

```
Characters 0-7 == [0xf0,0xf1,0xf2,0xf3,0xf4,0xf5,0xf6,0xf7]
Shorts     0-3 == [0xf0f1,0xf2f3,0xf4f5,0xf6f7]
Ints       0-1 == [0xf0f1f2f3,0xf4f5f6f7]
Long       0    == [0xf0f1f2f3]
```

# Byte Ordering on x86-64

## Little Endian

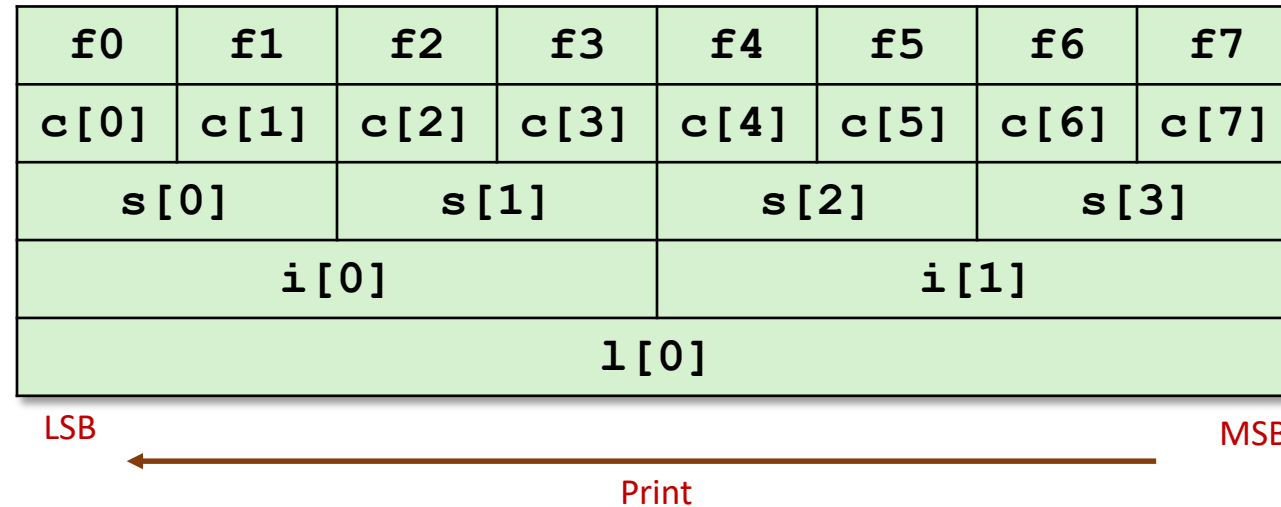

## Output on x86-64:

```
Characters 0-7 == [0xf0,0xf1,0xf2,0xf3,0xf4,0xf5,0xf6,0xf7]
Shorts     0-3 == [0xf1f0,0xf3f2,0xf5f4,0xf7f6]
Ints       0-1 == [0xf3f2f1f0,0xf7f6f5f4]
Long       0    == [0xf7f6f5f4f3f2f1f0]
```

# Summary of Compound Types in C

- Arrays
  - Contiguous allocation of memory
  - Aligned to satisfy every element's alignment requirement
  - Pointer to first element
  - No bounds checking
- Structures
  - Allocate bytes in order declared
  - Pad in middle and at end to satisfy alignment
- Unions
  - Overlay declarations
  - Way to circumvent type system