


The scCausal framework

NB likelihood-ratio conditional-independence testing replaces Fisher's z in the PC algorithm

One fair protocol: identical pre-filter, gene set and preprocessing for every test

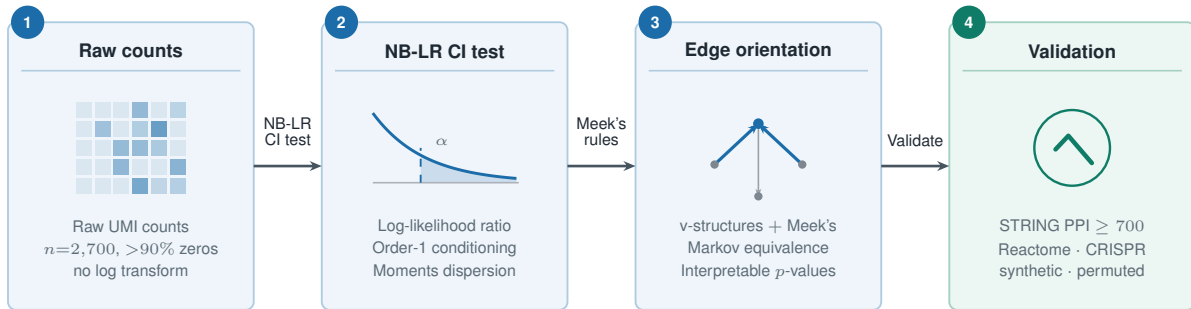

2 tissues · 4 cell types · 14 hematopoietic clusters · 100 simulation seeds · 5 comparison methods