

Demystifying ML, AI & Automation

Spyros Gkezerlis

24-25.10.2017

Intro

Spyros Gkezerlis - @sgez

About

BSc Automation Engineering – Telematic Applications

MSc Information Systems – Reinforcement Learning

Interests – Applied ML, RL especially in time domain

Experience

4 years Software Engineer in Greece

9 years Engineer and Manager in OTE

3 years Program Manager in DTAG




Ariadni Gkezerli
(c) 2017

Lecture Guidelines

- Stop for questions at any time! Be curious!!!
- Lunch all together for questions and NT
- Workflow to be used?
Kanban board with ToDo, Doing, Done
- First iteration through everything is a must
if more items:
put in ToDo
- Set as ToDo from the beginning

Basic understanding
of the landscape

- If noted, slides have links with extra source material
- TLAs can be explained whenever asked :-)

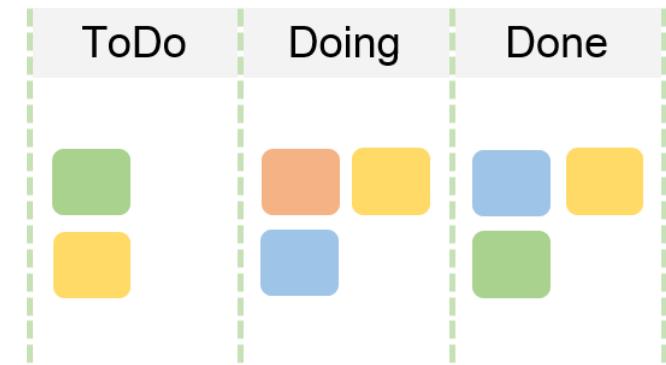

Why Lectures?

- Get a better overview of the current landscape in ML, AI & Automation
- "Set the record straight" sessions
- Create a common understanding of what ML, AI & Automation
- “Start with the problem” philosophy

Pros cons, Tools, etc. should not dictate what we should use!

- Identify what we want to solve
 - Work to the algorithms & models needed
 - Utilise best approach
- Assess ML potential



Do you want to
become an ML Jedi?

Why ML, AI, Automation?

- Why use Automation, Adv. Stats, Probability Theory, ML, AI?

Because it can help us:


- Reduce complexity of network
 - Improve experience by Time-to-market, Time-to-repair
 - Repetitive caused costs can be targeted and reduced
-
- Also... AI is another fun way to solve problems ☺
 - Keep in mind it can solve particular types of problems!!!



Landscape overview


Landscape and focus¹ areas vary:

- Automation
- Statistics & Probability
- Data Mining
- Artificial Intelligence
- Machine Learning
 - Supervised Learning
 - Unsupervised Learning
 - Reinforcement Learning
- Big Data Analytics

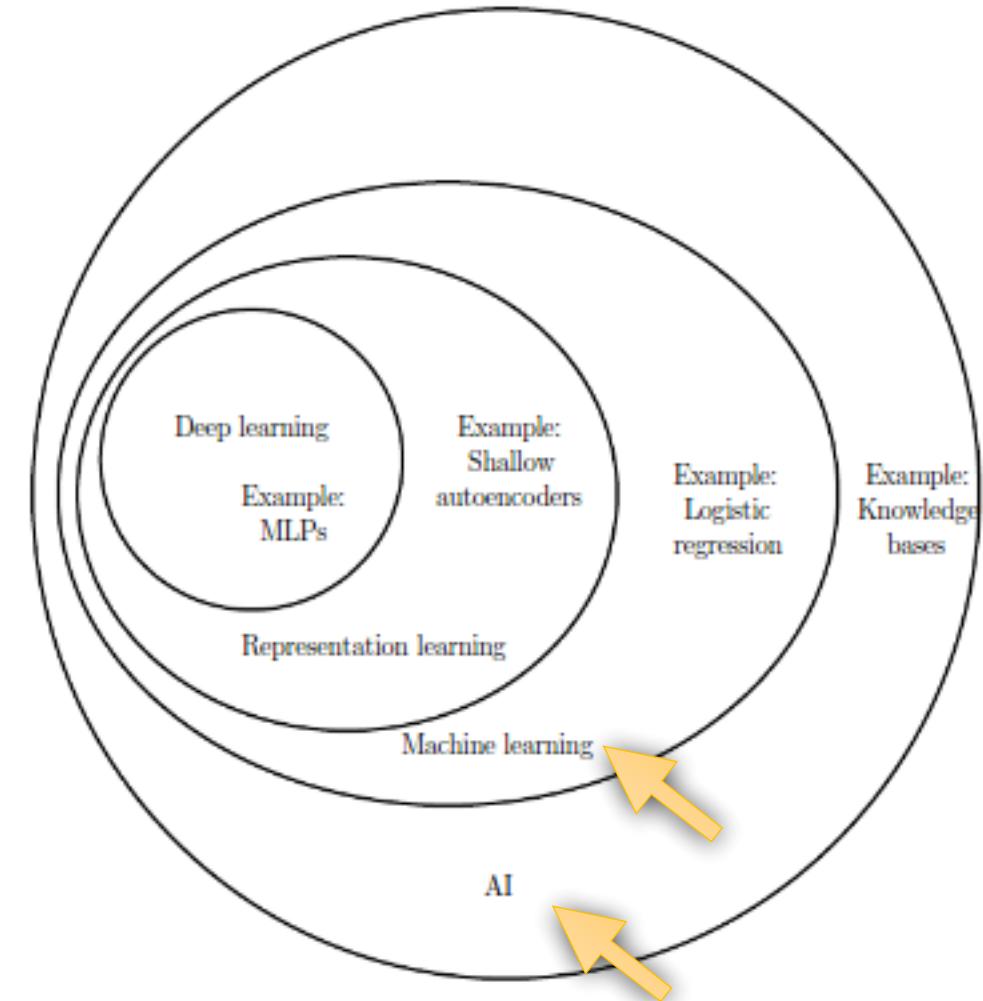


Automation

- Comes from ancient greek word which means the thing that wishes on its own or the has a will or fury by itself
- Describes the tasks that are or can be performed by machines autonomously
- It can be used to improve quality, accuracy, save costs and amplify precision

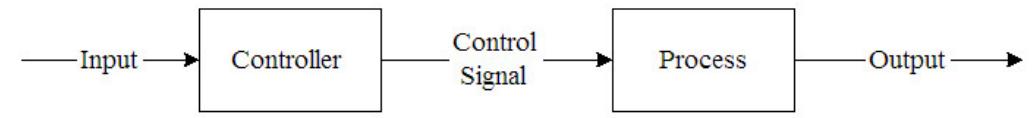

Open Loop System

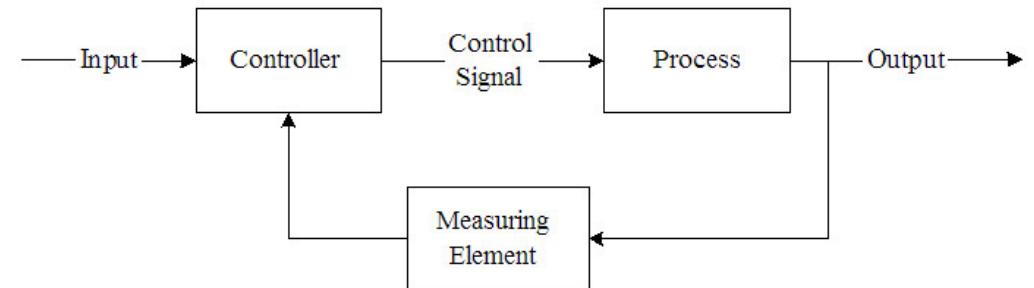

Closed Loop System

Bayes Theorem

- $P(A|B) \Rightarrow$ Probability of A given that B

- Exercise on Bayes²

Out of 3000 emails received over a certain period, 2000 are spam and 1000 are not. The word “Rolex” appeared in 250 out of the 2000 which are spam and in 5 out of the 1000. So, if an email is received, and contains the word “Rolex”, what is the possibility that it is a spam?

Let S be the event that the message is spam, and E be the event that the message contains the word w. Under our assumption from before, we have that:

$$p(S|E) = \frac{p(E|S)}{p(E|S) + p(E|\bar{S})}$$

Bayes Theorem exercise

- Example – Solution²:

Out of 3000 emails received over a certain period, 2000 are spam and 1000 are not. The word “Rolex” appeared in 250 out of the 2000 which are spam and in 5 out of the 1000.

So, if an email is received, and contains the word “Rolex”, what is the possibility that it is a spam?

Now $p(w)$ and $q(w)$ are empirical estimates of $p(EIS)$ and $p(EIS')$

$$r(Rolex) = \frac{p(Rolex)}{p(Rolex) + q(Rolex)} = \frac{0.125}{0.125 + .005} = \frac{0.125}{0.125 + .005} \approx 0.962$$

Markov Chains

- Statistics & Probability - Markov Chains³


Markov Chains is a probabilistic process, that relies on the current state to predict the next state. For Markov chains to be effective the current state has to be dependent on the previous state in some way; For instance, from experience we know that if it looks cloudy outside, the next state we expect is rain. We can also say that when the rain starts to subside into cloudiness, the next state will most likely be sunny.

Not every process has the Markov Property, such as the Lottery, this weeks winning numbers have no dependence to the previous weeks winning numbers.

MARKOV TABLE OF PROBABILITIES

STATE	NEXT STATE	PROBABILITY	%
CLOUDY	CLOUDY	0.1	10%
CLOUDY	RAIN	0.5	50%
CLOUDY	SUNNY	0.4	40%
RAIN	CLOUDY	0.3	30%
RAIN	RAIN	0.6	60%
RAIN	SUNNY	0.1	10%
SUNNY	CLOUDY	0.4	40%
SUNNY	RAIN	0.1	10%
SUNNY	SUNNY	0.5	50%

Markov State Diagram

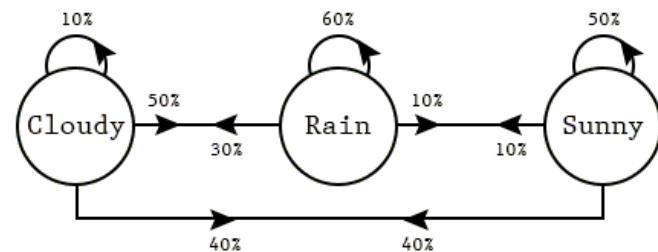

Current State Vector


C R S

1	0	0
---	---	---

Figure 4

Classifiers and Structures


- Other Topics
 - kNN⁴
 - Classifiers
- Structures
 - Trees
 - Graphs
 - Neural Networks⁴

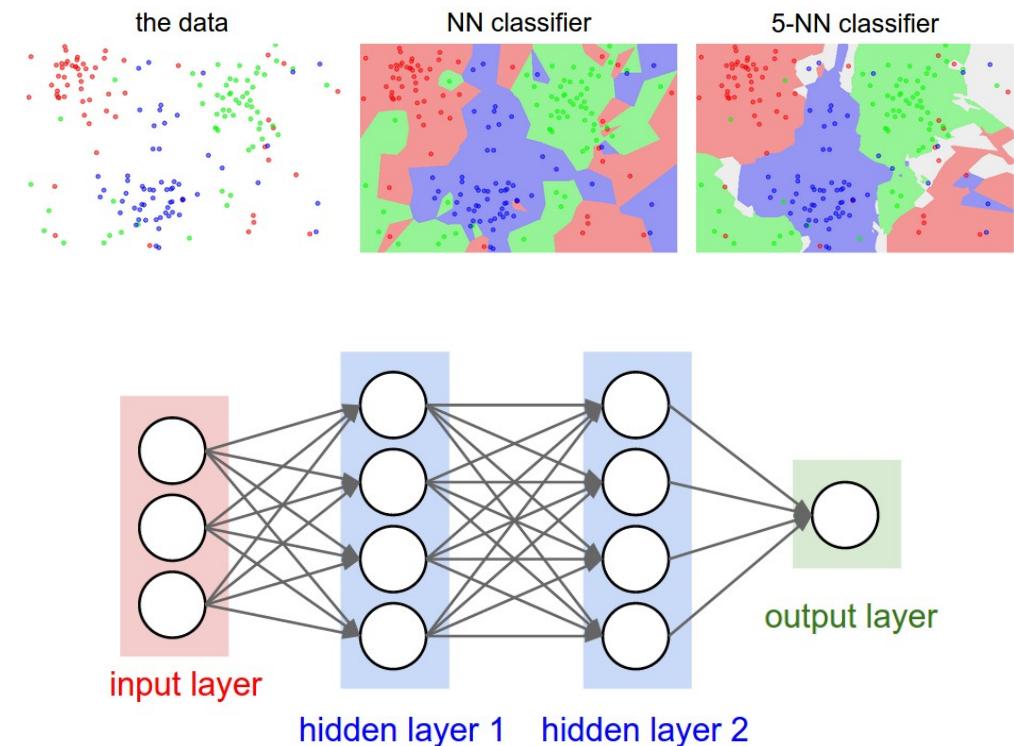

Supervised Learning - DTL


- Decision Tree Learning
DTL is method for approximating discrete valued target functions, in which the learned function is represented by a decision tree.
(Weka example will follow)
- Example⁵ dataset converted via algorithm to Decision tree

No.	1: outlook	2: temperature	3: humidity	4: windy	5: play
	Nominal	Numeric	Numeric	Nominal	Nominal
1	sunny	85.0	85.0	FALSE	no
2	sunny	80.0	90.0	TRUE	no
3	overcast	83.0	86.0	FALSE	yes
4	rainy	70.0	96.0	FALSE	yes
5	rainy	68.0	80.0	FALSE	yes
6	rainy	65.0	70.0	TRUE	no
7	overcast	64.0	65.0	TRUE	yes
8	sunny	72.0	95.0	FALSE	no
9	sunny	69.0	70.0	FALSE	yes
...	rainy	75.0	80.0	FALSE	yes
...	sunny	75.0	70.0	TRUE	yes
...	overcast	72.0	90.0	TRUE	yes
...	overcast	81.0	75.0	FALSE	yes
...	rainy	71.0	91.0	TRUE	no

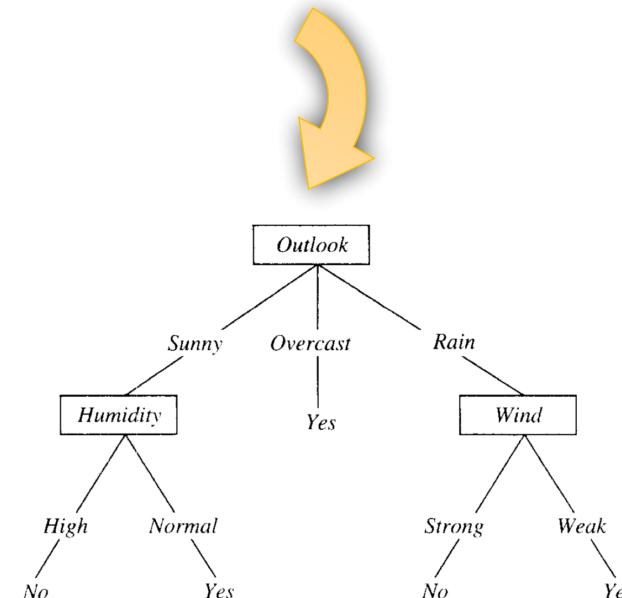


Reinforcement Learning (RL)

- Reinforcement Learning⁶ is learning what to do-- how to map situations to actions--so as to maximise a numerical reward signal.
- Reinforcement learning is defined not by characterising learning methods, but by characterising a learning problem.

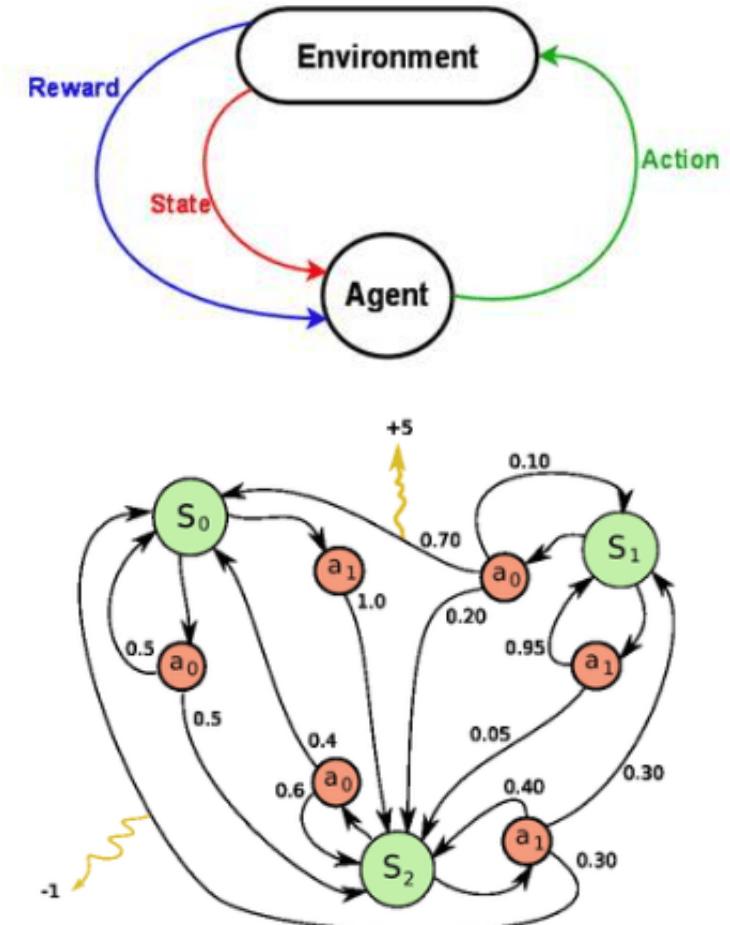

Workflow – The ML Pipeline⁷

- Start with the question or problem we want to solve
- Find proper data and sources
- Prepare & create a data set
- Choose a model e.g. Decision Tree, J48 Algorithm
- Train system & classify
- Evaluate the system and fine-tune
- Predict / Forecast
- Apply to workflow
- Automate into workflow

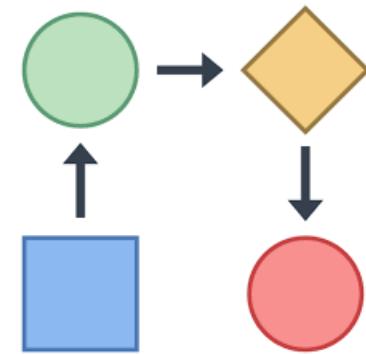


Prepare & create a dataset

- Dataset
 - Features or Attributes
 - Labels
 - Instances

Age	Nationality	Education	Job
25	Greek	MSc	Engineer
38	American	MSc	Analyst
35	Japanese	PhD	Assistant
...

Choose a model⁸

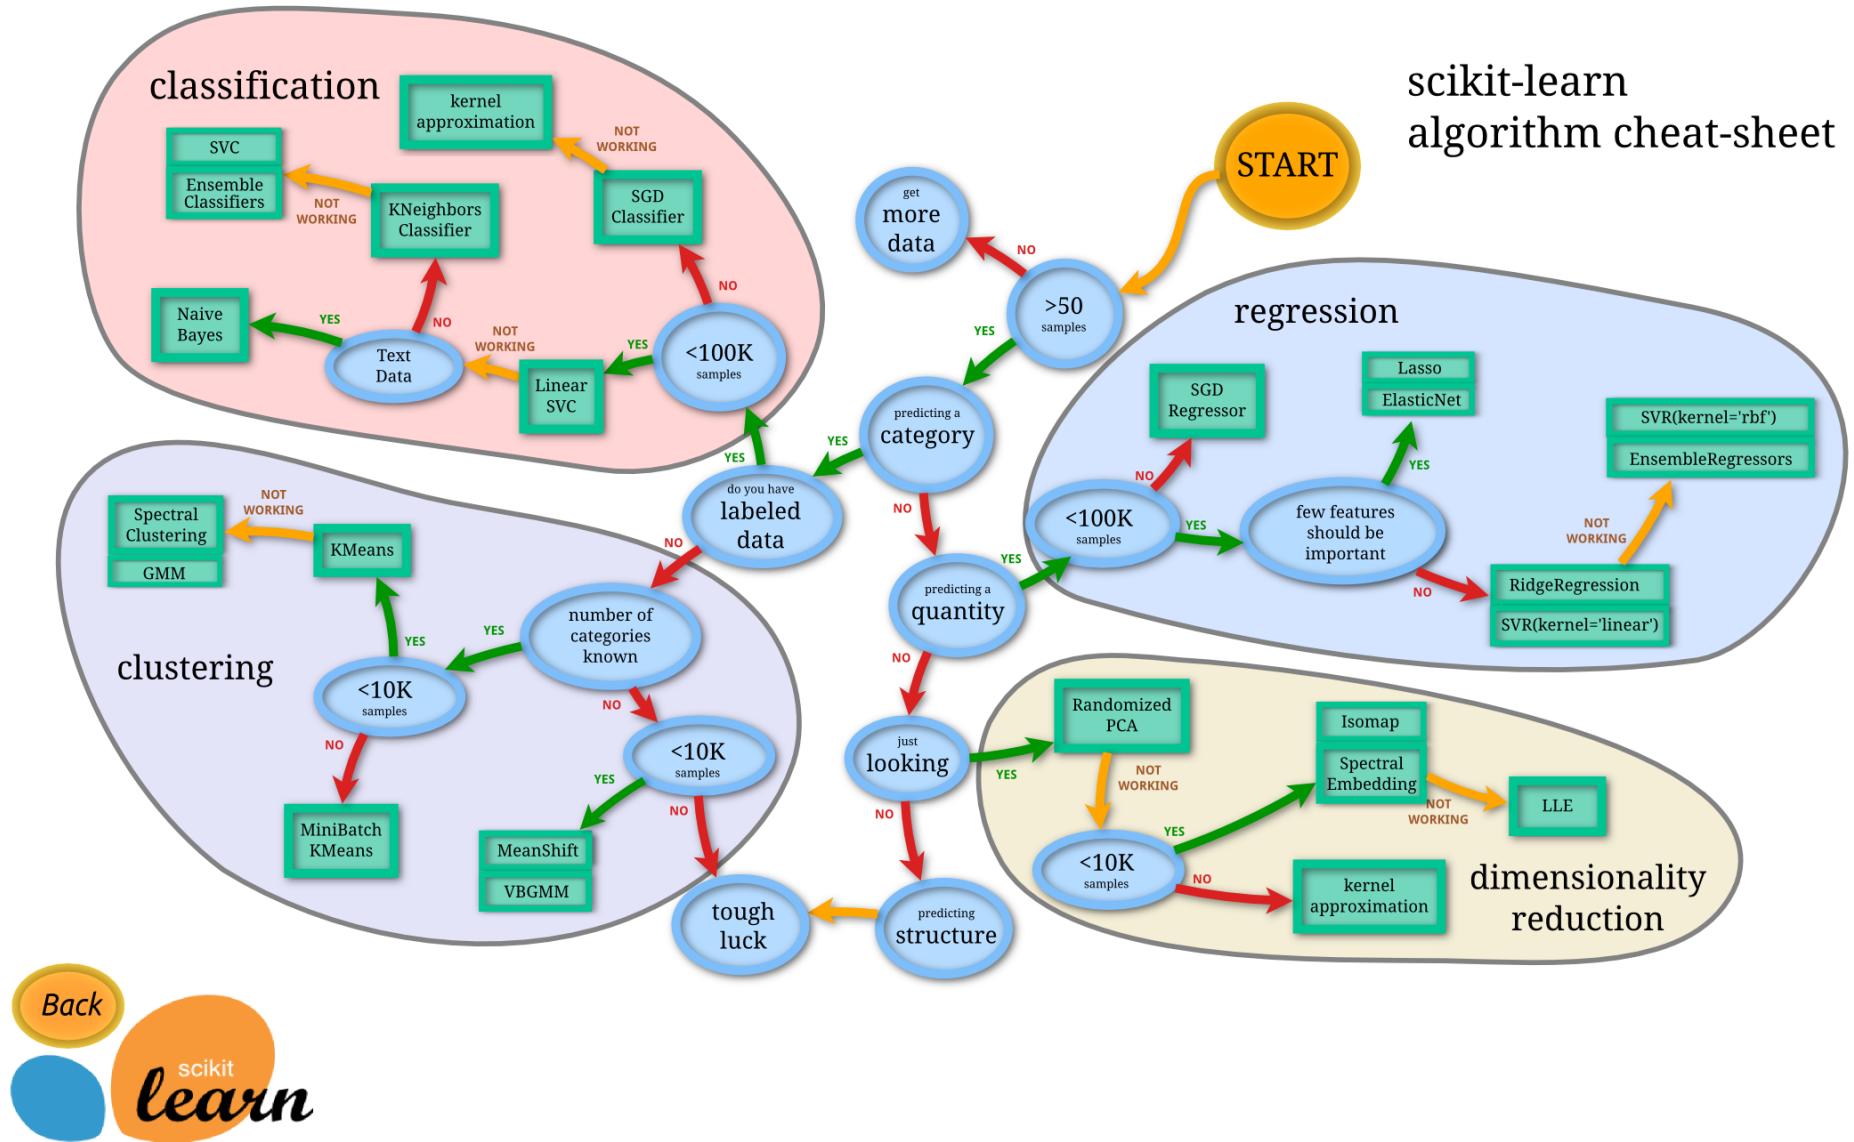


Tools – Landscape⁹

Category	Sub-category	Description	Examples
Packages of ML Implementations	Statistical Software Packages	Software toolkits with a large set of implementations of ML algorithms, typically with visualization support	SAS, R, Matlab, SPSS
	Data Mining Toolkits	Software toolkits with a relatively limited set of ML algorithms, typically over a data platform, possibly with incremental maintenance	Weka, AzureML, ODM, MADlib, Mahout, Hazy-Classify
	Developability-oriented Frameworks	Software frameworks and systems that aim to improve developability, typically from academic research	GraphLab, Bismarck, MLBase
	SRL Frameworks	Implementations of statistical relational learning (SRL)	DeepDive
	Deep Learning Systems	Implementations of deep neural networks	Google Brain, Microsoft Adam
	Bayesian Inference Systems	Systems providing scalable inference for Bayesian ML models	SimSQL, Elementary, Tuffy
Linear Algebra-based Systems	Statistical Software Packages	Systems offering an interactive statistical programming environment	SAS, R, Matlab
	R-based Analytics Systems	Systems that provide R or an R-like language for analytics, typically over a data platform, possibly with incremental maintenance	RIOT, ORE, SystemML, LINVIEW
Model Management Systems		Systems that provide querying, versioning, and deployment support	SAS, LongView, Velox
Systems for Feature Engineering		Systems that provide abstractions to make feature engineering easier	Columbus , DeepDive
Systems for Algorithm Selection		Systems that provide abstractions to make algorithm selection easier	MLBase, AzureML
Systems for Parameter Tuning		Systems that provide abstractions to make parameter tuning easier	SAS, R, MLBase, AzureML



Tools – Overview

- Weka
 - Data Mining GUI / basic ML
- Anaconda
 - Python
 - Dask
 - Scikit-Learn for ML/DL
 - Tensorflow for DL
 - R Studio
- Elasticsearch – Logstash - Kibana

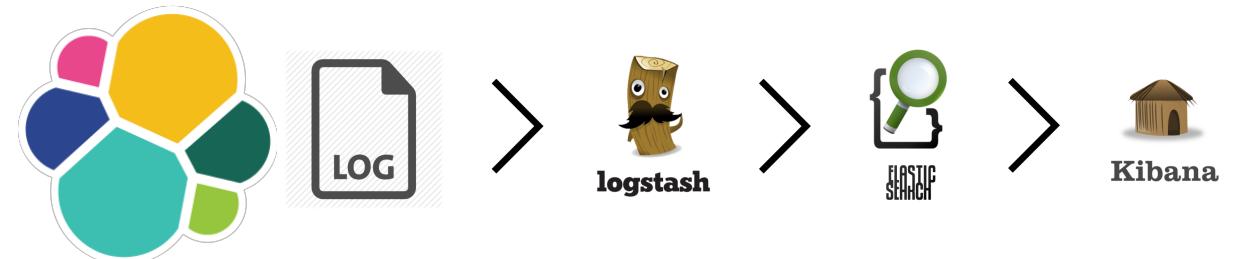

Example Datasets

- bitcoin
- cars
- flights
- milano_cells

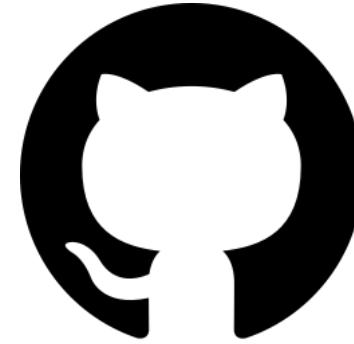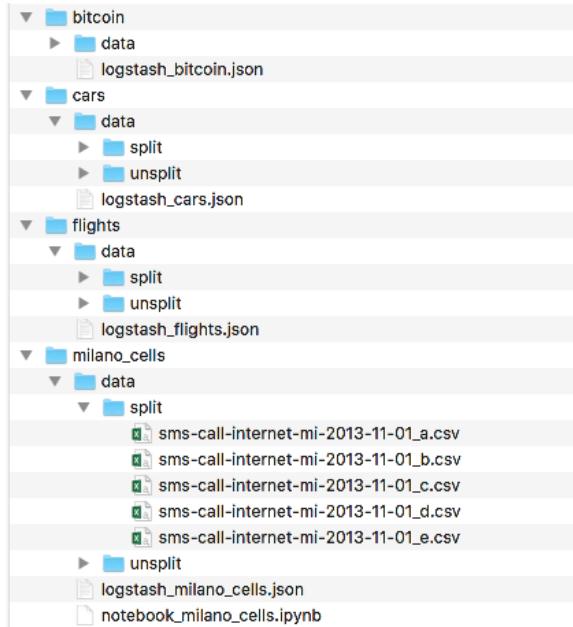

Lectures Page


<https://github.com/sgez/MLAI>

Practice (fun part :-)

- Weka For Data Mining / basic ML
- Anaconda Python & R for ML
- Elasticsearch (ELK) for Visualisation & ML

on:

- bitcoin
- cars
- flights
- milano_cells

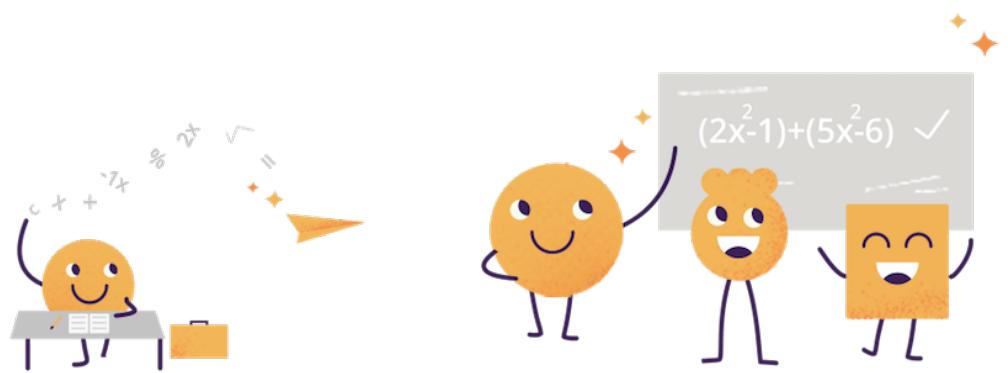

Special Thanks to Cosmote!

24.10.2017

- Diogenis Georgiadis
 - Zeta Papadopoulou
 - Christos Kavakopoulos

25.10.2017

- Christos Penitas
 - Antonis Galanakis
 - George Georgitselis



References

- [1] Ian Goodfellow and Yoshua Bengio and Aaron Courville, Deep Learning, 2016
<http://www.deeplearningbook.org>
- [2] CSE 240 Home Page, Todd S. Sproull, Spring 2016
https://www.arl.wustl.edu/~todd/cse240/cse240_lecture17_3-24-16.pdf
- [3] Joseph Armstrong, 2015
<http://techeffigytutorials.blogspot.com/2015/01/markov-chains-explained.html>
- [4] CS231n: Convolutional Neural Networks for Visual Recognition, Andrej Karpathy, 2017
<http://cs231n.github.io>
- [5] Machine Learning, Tom Mitchell, McGraw Hill, 1997.
<http://www.cs.princeton.edu/courses/archive/spr07/cos424/papers/mitchell-dectrees>
- [6] Reinforcement Learning: An Introduction, Sutton; Barto, 1998
<https://mitpress.mit.edu/0262193981>
- [7] ML Workflow - Loosely based on Yufeng G instructional series
<https://medium.com/towards-data-science/the-7-steps-of-machine-learning-2877d7e5548e>
- [8] Scikit-Learn Algorithm selection Procedure, Scikit-learn website
http://scikit-learn.org/stable/tutorial/machine_learning_map/index.html
- [9] A Survey of the Existing Landscape of ML Systems, Kumar, Arun; McCann, Robert; Naughton, Jeffrey; Patel, Jignesh M., Nov 27, 2015
<https://minds.wisconsin.edu/handle/1793/73834>

(citation).