


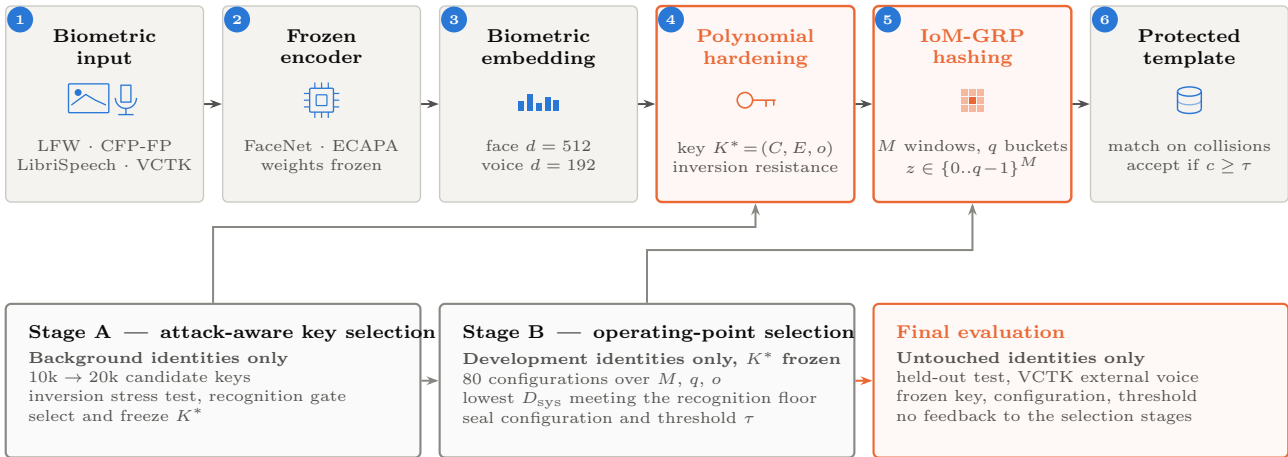

Background identities choose the key. Development identities choose the operating point.
Held-out and VCTK identities are read only for final evaluation.