


Protected-domain collision matching

1 PROTECTED TEMPLATES

2 COLLISION SCORE

3 FROZEN THRESHOLD

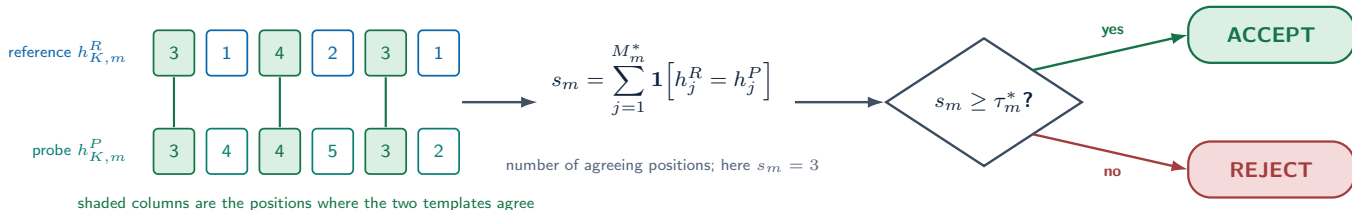

The threshold τ_m^* is chosen on development identities, alongside M_m^* , q_m^* and o_m^* of Figure 1, and is then frozen

Held-out and external identities are scored once at the frozen τ_m^* no re-tuning no threshold fitted on the evaluation data