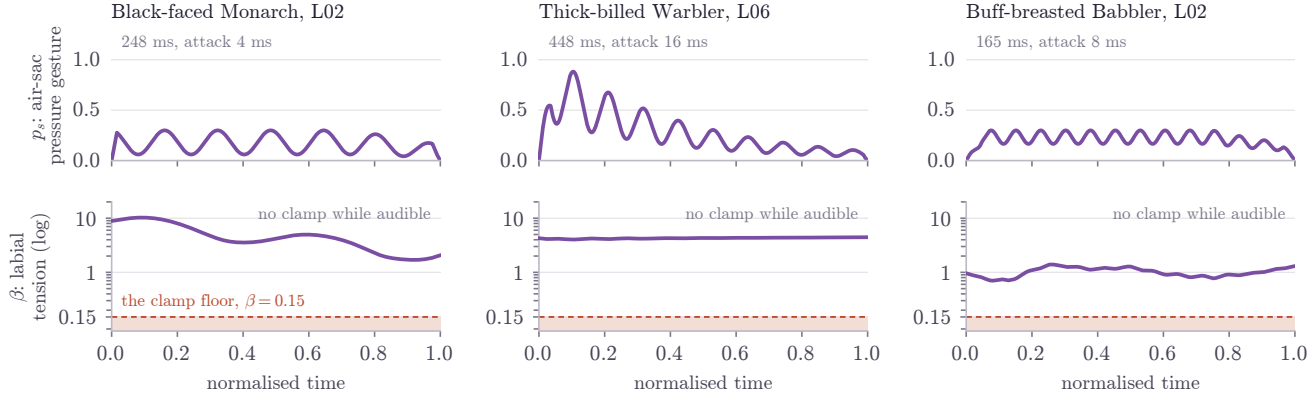

The two gestures the oscillator is driven by, for the same three types as the acoustic examples, read straight out of the shipped fit through the repository's own render planner and its measured tension table. This is what interpretable parameters buys: every sound in the corpus is two named physical contours and thirteen searched gesture axes, not a latent code. Pressure and tension are separate panels because they are separate units. The clamp annotation is measured per type, weighted by where the envelope is actually open; across the production learn the clamp bites in 6 617 of 12 724 types.