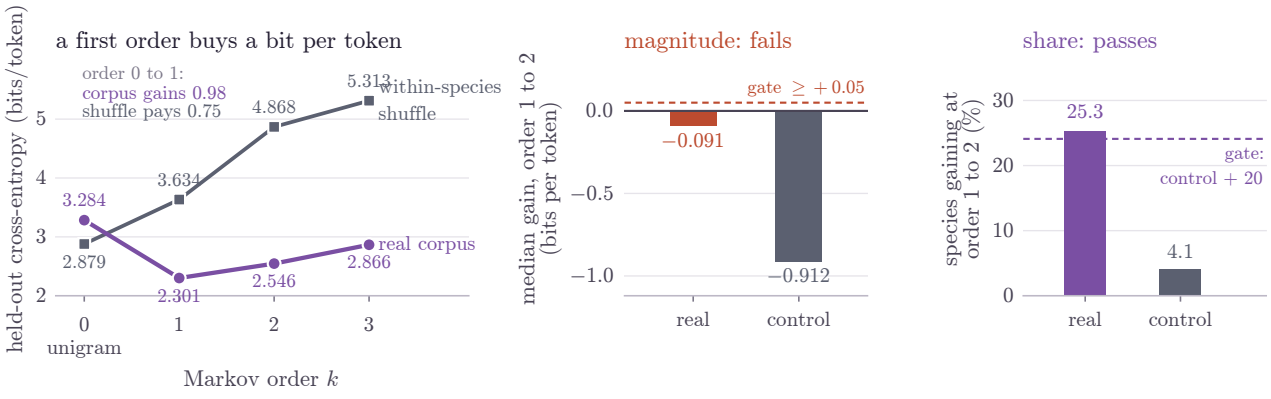

Lower is better on the left. Per species, an 80/20 split by bout, a k-order backoff model fitted on the train half, every held-out token scored. An unbiased estimator paying for parameters it cannot use is the clean form of the claim that the tokens are units: the model can only win if the transitions are real. A second order is not supported - the median species loses 0.091 bits per token at three independent splits - while a quarter of species gain something, six times the shuffle's rate. 217 of 2 421 species clear the 20-bout bar at which the question can be asked. Production scale.