


Shared pipeline (identical across all arms — only the mechanism box changes)

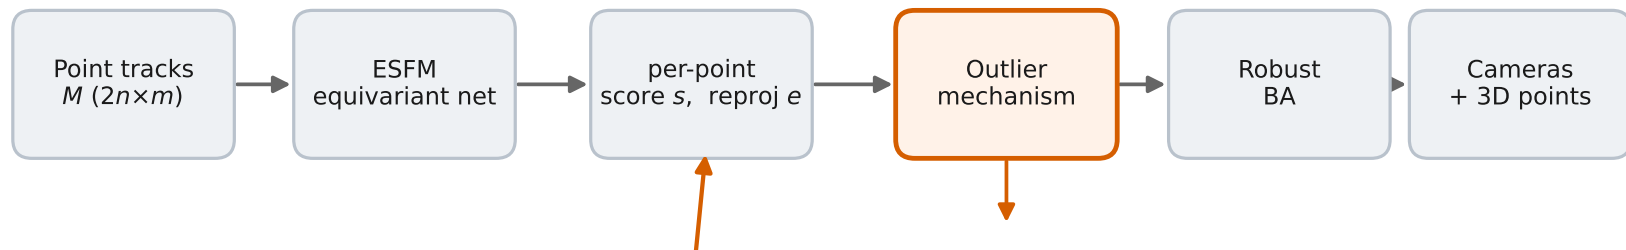

Only **madweight** uses the reprojection-error branch e — for its MAD removal step;
 its surviving points are then weighted by the head score s ($w = 1 - s$).
 remove / weight / hybrid use the head score s alone.

drop if $s > \tau$ ($\tau = 0.6$; 0.8 clean sets)
remove (RESfM analogue)

soft: $w = 1 - s$, keep all
weight (SS-RESfM, ours)

3-band: keep / soft / drop (percentiles)
hybrid (SS-RESfM, ours)

MAD-remove (reproj e) + soft $1 - s$
madweight (SS-RESfM, ours)

