


Shared pipeline (identical across all arms — only the mechanism box changes)

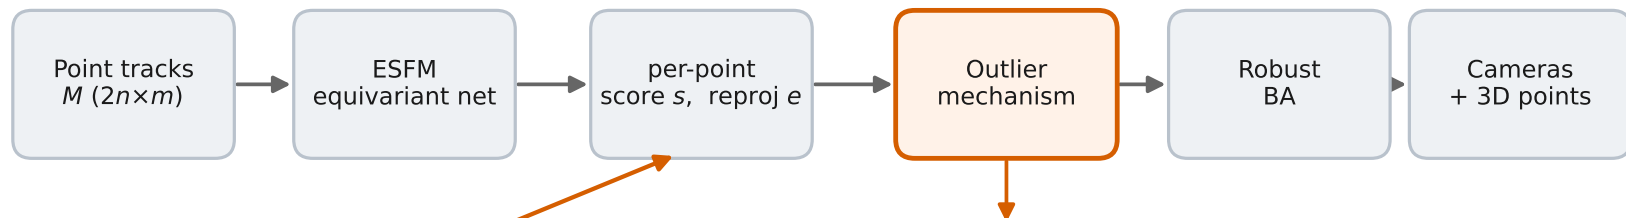

Only madweight uses the reprojection-error branch e (MAD removal); survivors are weighted by the head score s .

remove / weight / hybrid use the head score s alone.

drop if $s > \tau$ ($\tau = 0.6$; 0.8 clean sets)
remove (RESfM / SS, ours)

soft: $w = 1 - s$, keep all
weight (SS-RESfM, ours)

3-band: keep / soft / drop (percentiles)
hybrid (SS-RESfM, ours)

MAD-remove (reproj e) + soft $1 - s$
madweight (SS-RESfM, ours)

