


Lobster Profile: 01_PL_AGAT_RHD_OrderInterface_OrderImport_RHDPoland — Business Documentation

Generated: 2025-08-14 13:17
Source: Profile-01_PL_AGAT_RHD_OrderInterface_OrderImport_RHDPoland.xml

Workflow

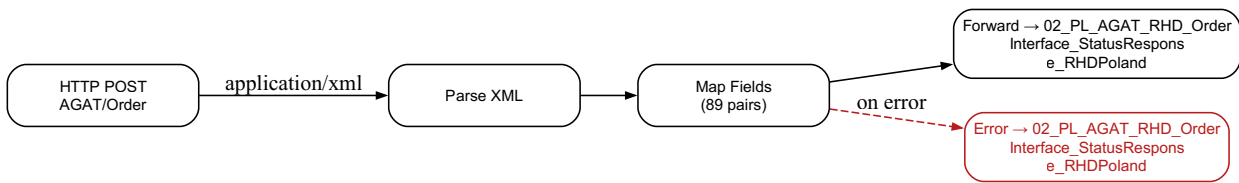

(Click the diagram to view full size)

Detailed Steps

- 1. Trigger**
Event-based HTTP POST to `AGAT/Order` with `application/xml` payload.
- 2. Parse XML**
Read and validate structure (record tag, encoding, namespaces).
- 3. Validate Data**
Check required fields and formats; reject incomplete or malformed payloads.
- 4. Map Fields**
Apply mapping rules from source → target (89 pairs discovered).
- 5. Forward / Handoff**
On success, hand off to
`02\_PL\_AGAT\_RHD\_OrderInterface\_StatusResponse\_RHDPoland`.
- 6. Error Handling**
On error, route to `02\_PL\_AGAT\_RHD\_OrderInterface\_StatusResponse\_RHDPoland` for diagnostics and notifications.

Profile Purpose

Overview
This profile receives POST requests at AGAT/Order and maps the incoming data to the internal format for downstream processing.

Input Data

Transport
API (POST)

Payload Type
application/xml
Endpoint (suffix)
AGAT/Order

Mapping

Source Structure	Target Structure
OrderNumber	OrderNumber
Remark	Remark
AmountValue-2	AmountValue#2
AmountValue-3	AmountValue#3
FreightTerm	FreightTerm
Salutation-1	Salutation#1
ServiceType	ServiceType
SequenceNumber	SequenceNumber
Street	Street
DesiredDate	DesiredDate
ReturnOrder-1_choice_1_val	ReturnOrder#1_choice_1_val
AmountValue-1	AmountValue#1
Fax-1	Fax#1
PostalCode-1	PostalCode#1
LocationCode	LocationCode
PackageQuantity	PackageQuantity
Volume	Volume
SenderAbbreviation	SenderAbbreviation
Country	Country
TransmissionCommand	TransmissionCommand
LocationType-2	LocationType#2
LocationType-1	LocationType#1
HouseNumber	HouseNumber
Street-1	Street#1
ArticleWeight	ArticleWeight
Salutation	Salutation
HouseNumber-1	HouseNumber#1
ItemBarcode_val	ItemBarcode_val
Phone3-1	Phone3#1
OrderNumber2	OrderNumber2
MessageDate	MessageDate
OrderNumber3	OrderNumber3
FirstName	FirstName
City-1	City#1
EMail	EMail
AmountValue	AmountValue
ServiceOnly-1_choice_1_val	ServiceOnly#1_choice_1_val

Source Structure	Target Structure
AttributeKey	AttributeKey
Country-1	Country#1
LatestTime	LatestTime
OrderInterfaceVersion_attr	OrderInterfaceVersion_attr
OrderCreation	OrderCreation
AmountCurrency-2	AmountCurrency#2
AttributeValue	AttributeValue
AmountCurrency-3	AmountCurrency#3
Remark-1	Remark#1
AmountCurrency-1	AmountCurrency#1
Remark-2	Remark#2
Name	Name
AdditionalAddressLine-1	AdditionalAddressLine#1
CustomerNumber	CustomerNumber
ArticleNumber	ArticleNumber
TransportType	TransportType
Client	Client
Phone2-1	Phone2#1
City	City
PositionNumber	PositionNumber
Weight	Weight
ArticleDescription	ArticleDescription
PostalCode	PostalCode
InjectionBordereau	InjectionBordereau
AdditionalAddressLine	AdditionalAddressLine
Phone1	Phone1
Phone3	Phone3
Phone2	Phone2
Floor-1	Floor#1
FirstName-1	FirstName#1
Quality	Quality
LocationCode-1	LocationCode#1
FixedDate	FixedDate
LocationCode-2	LocationCode#2
Phone1-1	Phone1#1
Floor	Floor
InjectionDate	InjectionDate
ReferenceOrderNumber	ReferenceOrderNumber
Title	Title
Quantity	Quantity
Quantity-1	Quantity#1
Title-1	Title#1
ArticleVolume	ArticleVolume

Source Structure	Target Structure
PositionNumber-1	PositionNumber#1
EMail-1	EMail#1
AmountCurrency	AmountCurrency
EarliestTime	EarliestTime
Name-1	Name#1
Fax	Fax
LocationType	LocationType
Hold	Hold
MessageId	MessageId

Output Data

Forwarding Type
 Internal profile handoff
Success Profile
 02_PL_AGAT_RHD_OrderInterface_StatusResponse_RHDPoland
Error Profile
 02_PL_AGAT_RHD_OrderInterface_StatusResponse_RHDPoland

Trigger

Mode
 Event-based (HTTP request received)
Method Allowed
 POST: true
API Enabled
 true
Incoming URL
 AGAT/Order

Generated offline.