



1. Script of the Marco.sh

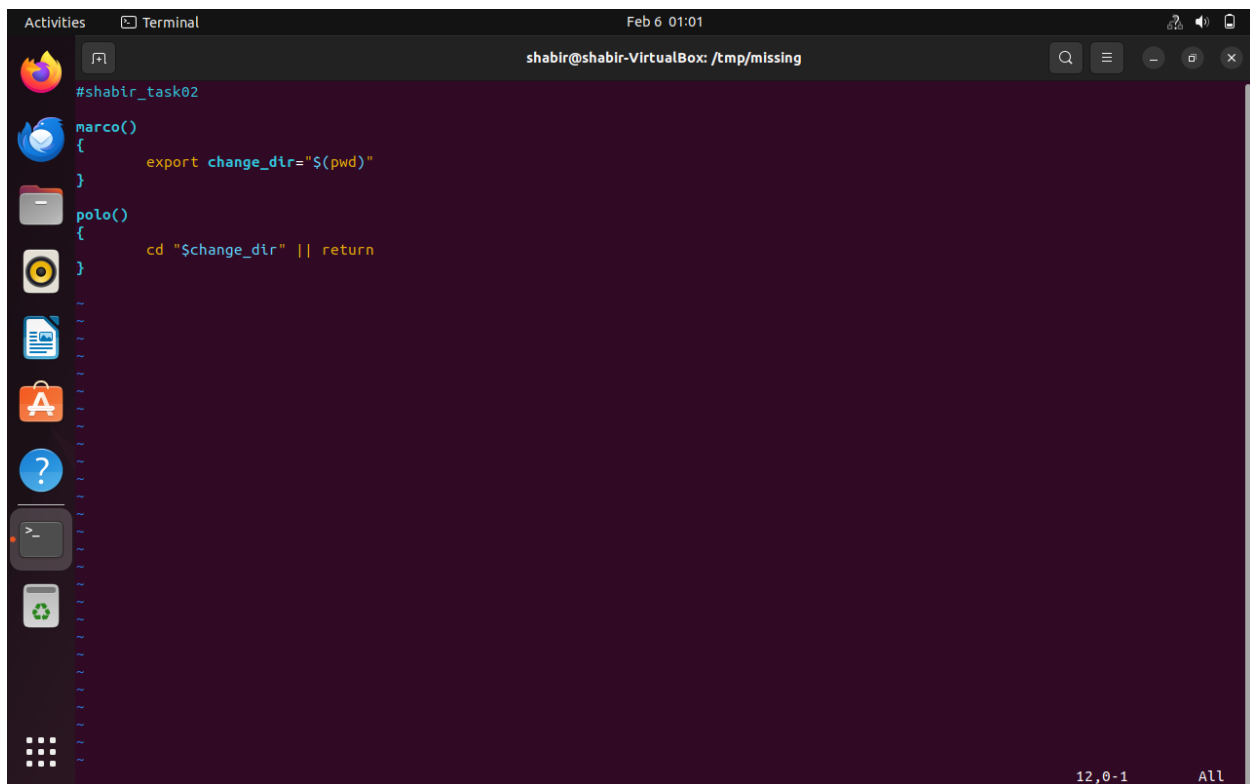

A terminal window titled "shabir@shabir-VirtualBox: /tmp/missing" showing the script content of marco.sh. The script defines two functions: marco() and polo(). The marco() function sets an environment variable change_dir to the current directory. The polo() function changes the directory to the value of change_dir and returns. The terminal shows the script content with line numbers 1 through 12 on the left margin.

```
#shabir_task02
marco()
{
    export change_dir="$(pwd)"
}
polo()
{
    cd "$change_dir" || return
}
1
2
3
4
5
6
7
8
9
10
11
12
```

2. Terminal output:

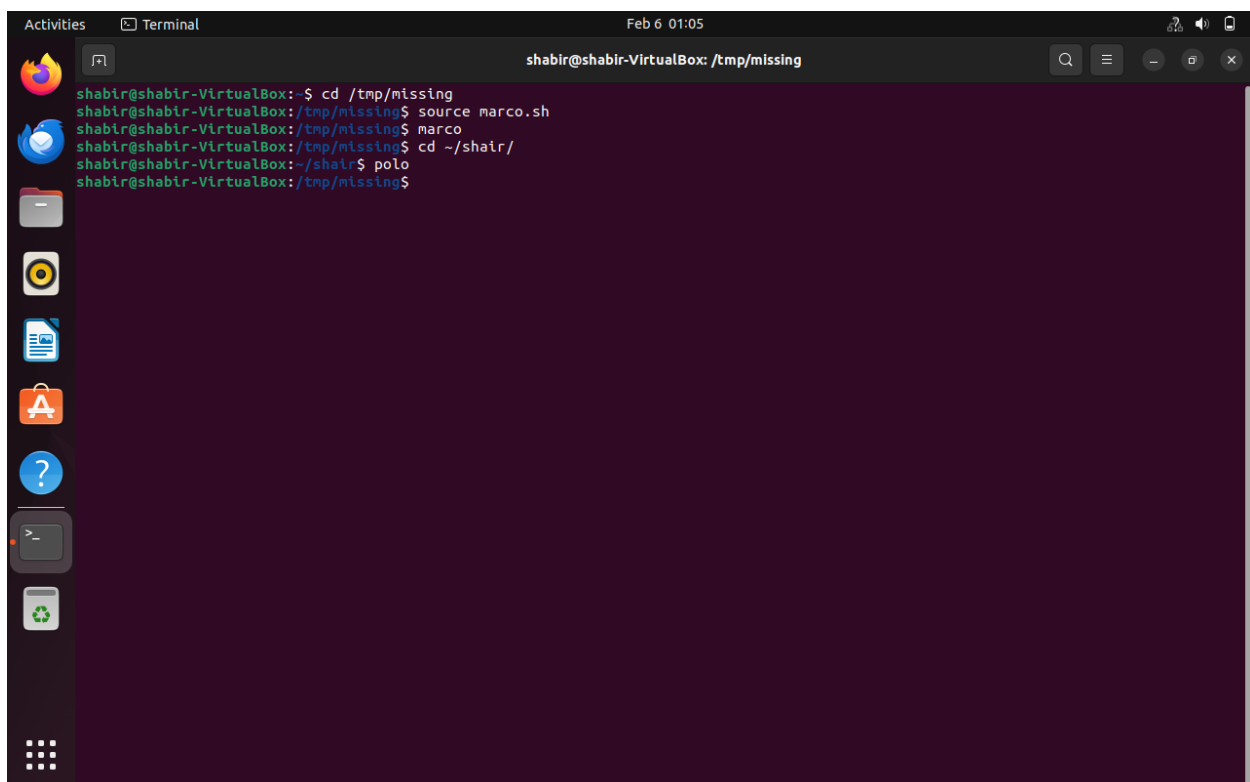

A terminal window titled "shabir@shabir-VirtualBox: /tmp/missing" showing the execution of the script. The user runs the following commands: cd /tmp/missing, source marco.sh, marco, cd ~/shair/, and polo. The terminal output shows the current directory changing to /tmp/missing and then to /shair/.

```
shabir@shabir-VirtualBox:~$ cd /tmp/missing
shabir@shabir-VirtualBox:/tmp/missing$ source marco.sh
shabir@shabir-VirtualBox:/tmp/missing$ marco
shabir@shabir-VirtualBox:/tmp/missing$ cd ~/shair/
shabir@shabir-VirtualBox:~/shair$ polo
shabir@shabir-VirtualBox:/tmp/missing$
```