CASCADING STYLE SHEETS (CSS)

BASICS OF CASCADING STYLE SHEETS

- CSS (Cascading Style Sheets) is a language used to define the visual presentation of HTML elements on a webpage.
- It allows developers to apply styles, such as colors, layouts, fonts, and spacing, to improve the aesthetics and user experience of web pages.

PURPOSE AND IMPORTANCE OF CSS

- **Separate Content from Presentation:** HTML structures content, while CSS defines how it looks.
- **Maintain Consistency:** CSS makes it easier to style multiple pages uniformly.
- **Improved Efficiency:** Reusable stylesheets reduce redundancy and enhance development speed.

HOW CSS WORKS

- CSS applies styles to HTML elements by using selectors, properties, and values.

```
selector {
    property: value;
}
```

- Selector: Targets an HTML element (e.g., <h1>, <p>).
- Property: The styling aspect to be defined (e.g., color, font-size).
- Value: Specifies the desired style for the property.

```
h1 {
    color: blue;
    font-size: 24px;
}
```

TYPES OF CSS

Type	Description	Syntax Example
Inline CSS	CSS defined directly within an HTML tag using the style attribute.	This is inline CSS
Internal CSS	CSS written within the <style> tag in the <head> section of an HTML document.	<style> p { color: red; }</style>
External CSS	CSS stored in a separate .css file, linked to the HTML document.	<link rel="stylesheet" href="styles.css">

CSS SELECTORS

- CSS selectors define which HTML elements are styled.

Selector Type	Description	Example
Universal Selector	Selects all elements.	* { margin: 0; }
Element Selector	Selects elements by tag name.	p { color: blue; }
Class Selector	Targets elements with a specific class attribute.	.example { color: red; }
ID Selector	Targets an element with a specific id attribute.	#header { font-size: 20px; }
Group Selector	Applies styles to multiple elements at once.	h1, h2 { color: green; }
Pseudo-classes	Targets elements in specific states (e.g., hover, focus).	a:hover { text-decoration: underline; }

KEY COMPONENTS OF CSS SYNTAX

Component	Description	Example
Selector	Identifies the HTML element(s) to be styled.	h1 for <h1> elements.
Property	Specifies the style attribute to modify.	color, font-size.
Value	Specifies the setting for the property.	red, 20px.
Declaration	A property-value pair that determines the styling.	color: blue;.
Declaration Block	Groups one or more declarations within curly braces {}.	{ color: blue; font-size: 18px; }.

COMMENTS IN CSS

- CSS comments are used to explain code and are ignored by browsers.

  - /* This is a comment */
  - h1 {
  - color: blue; /* This will style all h1 elements */
  - }

VALUE TYPES FOR COLOR:

Value Type	Example
Named Colors	color: red;
HEX Codes	color: #ff5733;
RGB Values	color: rgb(255, 87, 51);
RGBA Values	color: rgba(255, 87, 51, 0.7);
HSL Values	color: hsl(11, 100%, 60%);
HSLA Values	color: hsla(11, 100%, 60%, 0.5);

```
<!DOCTYPE html>
<html>
<head>
  <style>
    h1 {
      color: red; /* Named color */
    }
    p {
      color: #0073e6; /* HEX color */
    }
    span {
      color: rgba(0, 128, 0, 0.5); /* Transparent green */
    }
  </style>
</head>
<body>
  <h1>This is a heading</h1>
  <p>This is a paragraph.</p>
  <span>This is semi-transparent text.</span>
</body>
</html>
```

COMMON PROPERTIES WITH VALUES

Property	Description	Example Value
color	Sets the text color.	red, #ff0000, rgb(255,0,0)
background-color	Sets the background color.	yellow, #0000ff.
font-size	Sets the size of text.	16px, 1.2em.
margin	Defines space around an element.	10px, auto.
padding	Defines space inside an element.	5px, 10px 15px.

BOX MODEL

- CSS treats every HTML element as a rectangular box. The box model consists of the following layers:

Layer	Description
Content	The actual content inside the element.
Padding	Space between the content and the border.
Border	Surrounds the content and padding, forming the outer edge of the element.
Margin	The space outside the border, creating distance from neighboring elements.

EXAMPLE BOX MODEL STYLING:

```
div {
    width: 300px;
    padding: 20px;
    border: 5px solid black;
    margin: 15px;
}
```

ADVANTAGES OF CSS

- **A. Presentation Control**
  - **Customizable Designs:** Enables fine-tuned control over the appearance of webpages.
  - **Consistency:** Ensures uniform styles across multiple web pages using a single stylesheet.
- **B. Efficiency**
  - **Reusable Code:** Styles can be defined once in an external stylesheet and reused across multiple pages.
  - **Faster Development:** Allows rapid prototyping and simplifies editing.
- **C. Improved Performance**
  - **Smaller HTML Files:** Offloading style information to external files reduces HTML clutter.
  - **Faster Loading Times:** Browsers cache external CSS, minimizing redundant downloads.
- **D. Enhanced User Experience**
  - **Responsive Design:** Facilitates adaptation to different screen sizes and resolutions.
  - **Animations and Transitions:** Adds interactivity and enhances visual appeal.
- **E. Compatibility**
  - **Cross-Browser Support:** CSS is supported by all modern browsers.
  - **Accessibility:** Enhances readability and usability for people with disabilities using assistive technologies.

DISADVANTAGES OF CSS (LIMITATIONS)

Limitation	Explanation
Cross-Browser Issues	Variations in browser implementations can lead to inconsistencies in style rendering.
Complex Debugging	Large stylesheets or conflicting rules can make debugging difficult.
Dependence on HTML	Styles depend on accurate HTML markup; poorly written HTML can affect the design.

EXTERNAL STYLESHEETS IN CSS

- An **external stylesheet** is a separate file containing CSS code.
- It allows developers to apply styles consistently across multiple HTML documents by linking the stylesheet to each document.
- This separation of content (HTML) from presentation (CSS) enhances maintainability and reusability.

HOW TO CREATE AND LINK AN EXTERNAL STYLESHEET

- Create a CSS File:
  - Save the CSS code in a file with a .css extension, e.g., styles.css.
- Link the CSS File to an HTML Document:
  - Use the <link> tag in the <head> section of the HTML document.

EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
    <title>External CSS Example</title>
    <link rel="stylesheet" href="styles.css">
</head>
<body>
    <h1>Welcome to External Stylesheets</h1>
    <p>This is an example of using an external CSS file.</p>
</body>
</html>
```

CSS FILE (STYLES.CSS):CSS

```
h1 {
    color: blue;
    font-size: 36px;
    text-align: center;
}

p {
    color: gray;
    font-size: 18px;
    line-height: 1.6;
}
```

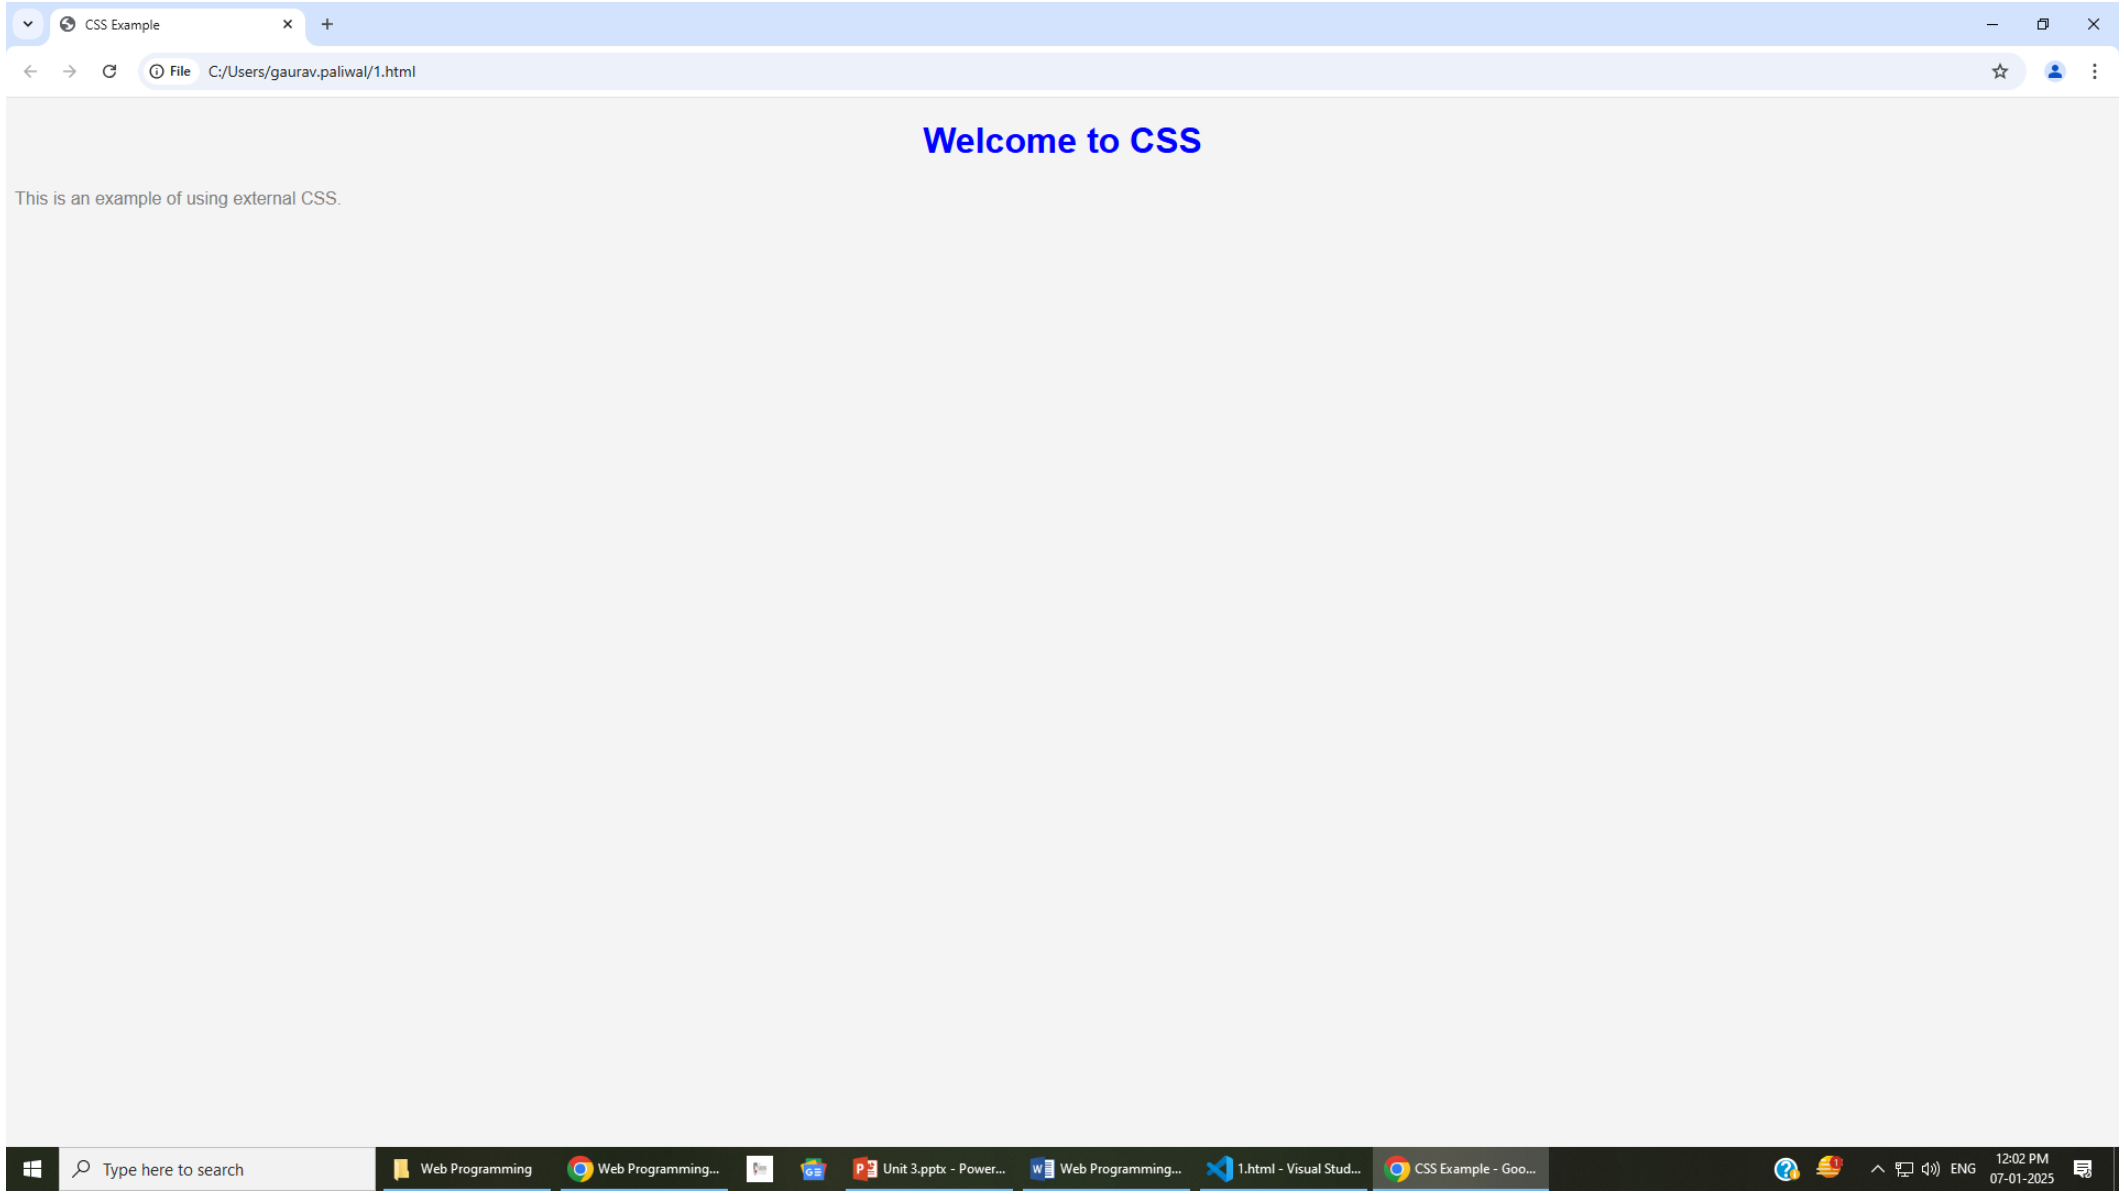
CSS Example
File
C:/Users/gaurav.paliwal/1.html
Welcome to CSS
This is an example of using external CSS.
Type here to search
Web Programming
Web Programming...
Unit 3.pptx - Power...
Web Programming...
1.html - Visual Stud...
CSS Example - Goo...
ENG
12:02 PM
07-01-2025

ADVANTAGES OF USING EXTERNAL STYLESHEETS

Advantage	Description
Code Reusability	A single stylesheet can be applied to multiple HTML documents.
Separation of Concerns	Content (HTML) and presentation (CSS) are kept separate, improving maintainability.
Reduced File Size	HTML files are smaller, making them easier to read and faster to load.
Ease of Maintenance	Changes made to the CSS file affect all linked pages, saving time and effort.
Browser Caching	Browsers cache CSS files, improving page load speed for subsequent visits.

RULES FOR LINKING EXTERNAL STYLESHEETS

- Use the <link> Tag:
  - It must be placed in the <head> section of the HTML document.
    - <link rel="stylesheet" href="styles.css">
- Correct href Attribute:
  - Use the proper relative or absolute path to the CSS file.
- Multiple Stylesheets:
  - You can link more than one stylesheet:
    - <link rel="stylesheet" href="layout.css">
    - <link rel="stylesheet" href="theme.css">
- Avoid Circular Dependencies:
  - Avoid linking one CSS file to another using @import in external files excessively, as this can increase load times.

STRUCTURE OF AN EXTERNAL CSS FILE

- A CSS file contains selectors, properties, and values but does not include any HTML or <style> tags.
  - /* Header styles */
  - h1 {
  - color: navy;
  - font-family: 'Arial', sans-serif;
  - font-size: 32px;
  - text-align: center;
  - }

  - /* Paragraph styles */
  - p {
  - color: #333;
  - font-size: 16px;
  - line-height: 1.5;
  - }

EXAMPLE: APPLYING EXTERNAL STYLESHEETS

- HTML Document (index.html):
  - <!DOCTYPE html>
  - <html>
  - <head>
  - <title>External Stylesheets</title>
  - <link rel="stylesheet" href="styles.css">
  - </head>
  - <body>
  - <h1>Hello World</h1>
  - This paragraph demonstrates an external stylesheet.
  -
  - This is a styled div.
  -
  - </body>
  - </html>

CSS FILE (STYLES.CSS):

```
/* Style for the heading */
h1 {
    color: darkblue;
    text-align: center;
    font-size: 36px;
}

/* Style for the paragraph */
p {
    color: #444;
    font-family: 'Georgia', serif;
    margin: 10px 20px;
}
```

```
/* Style for the box */
.box {
    width: 300px;
    height: 100px;
    background-color: #f4f4f4;
    border: 2px solid #ccc;
    margin: 20px auto;
    text-align: center;
    line-height: 100px;
}
```

RENDERED OUTPUT:

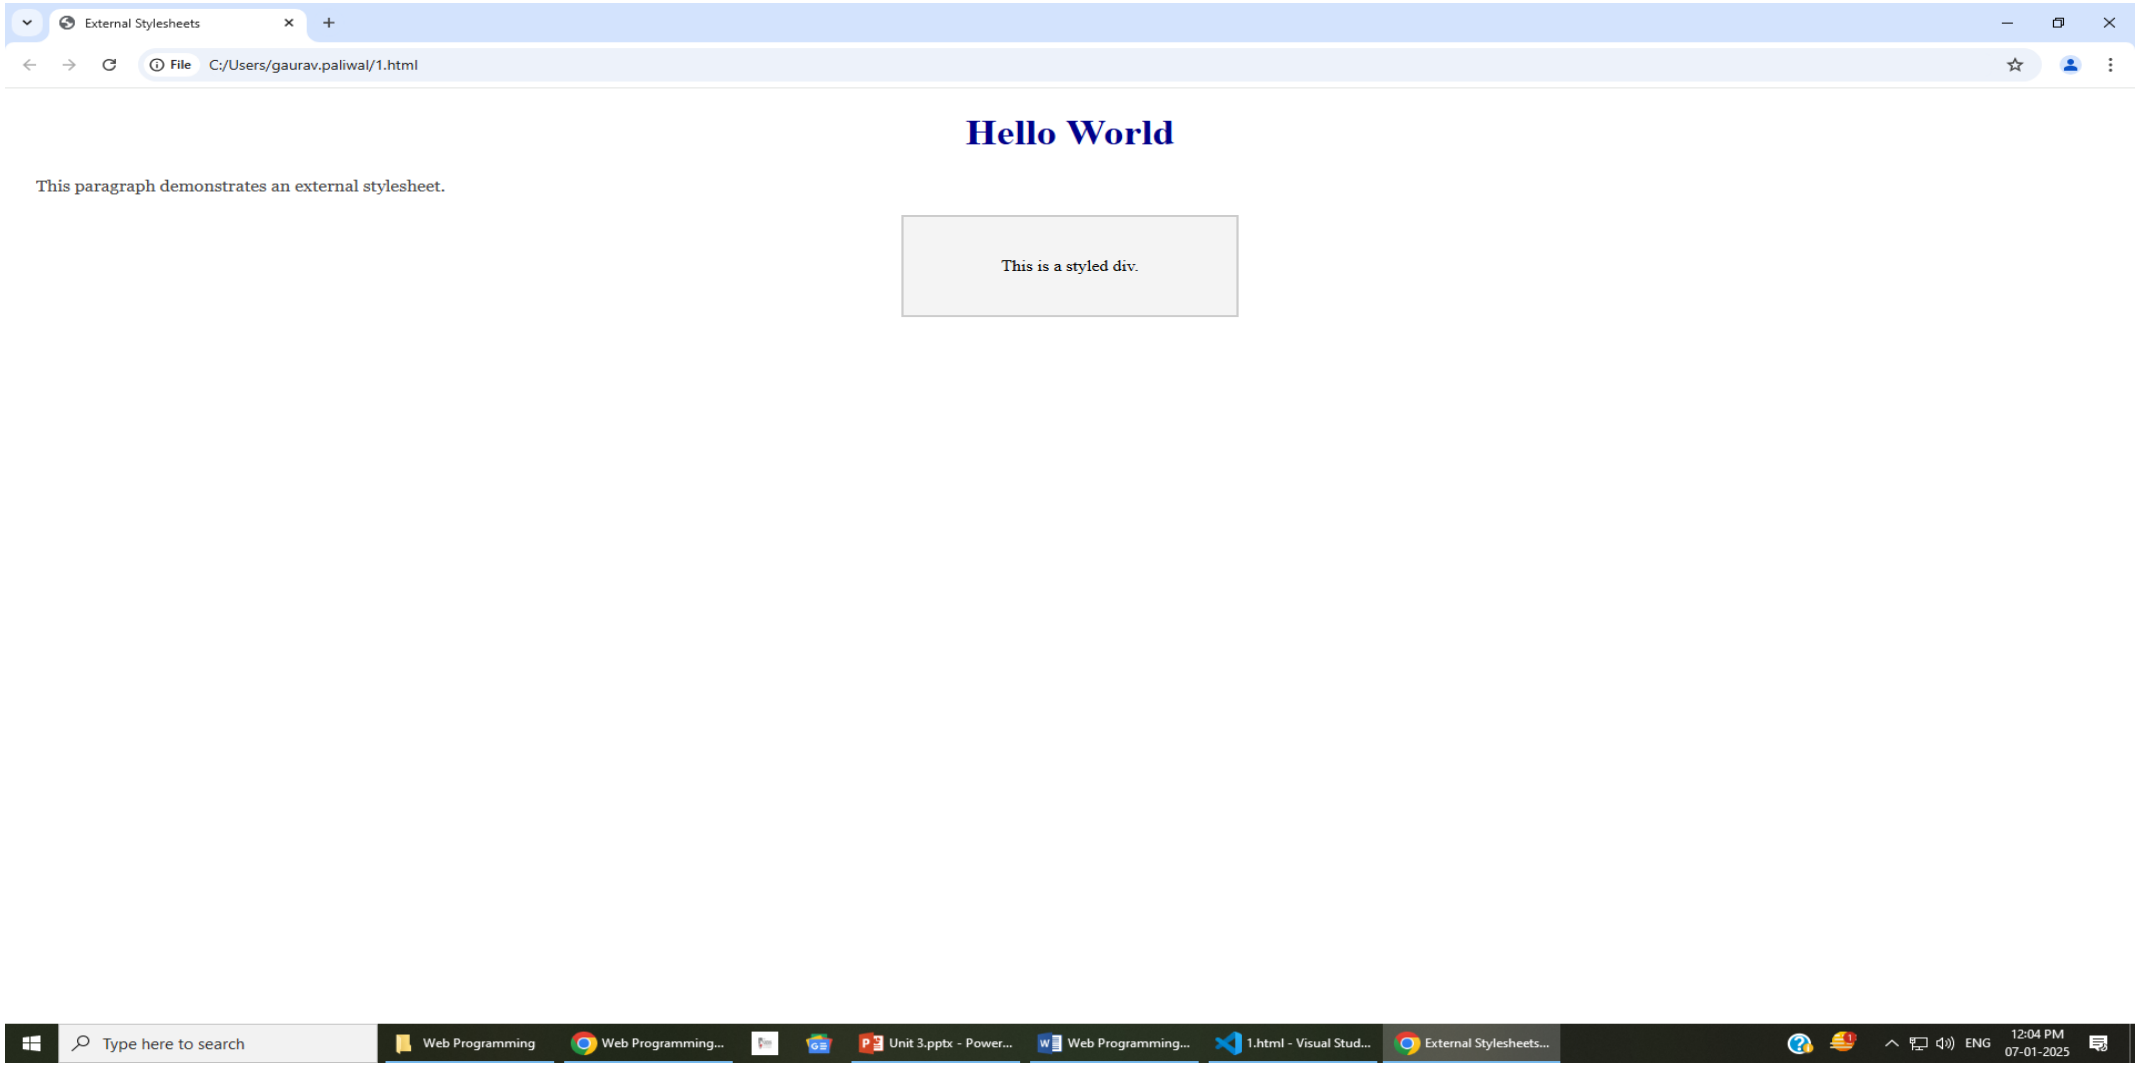

ORGANIZING CSS FILES FOR LARGER PROJECTS

- In larger projects, you can organize CSS into multiple files based on their purpose.
- For example:
  - reset.css: Normalizes browser default styles.
  - layout.css: Handles structural and layout styles.
  - theme.css: Manages theme-specific styles like colors and typography.

  - <link rel="stylesheet" href="reset.css">
  - <link rel="stylesheet" href="layout.css">
  - <link rel="stylesheet" href="theme.css">

BEST PRACTICES FOR USING EXTERNAL STYLESHEETS

- Minimize HTTP Requests: Combine multiple CSS files into one when possible.
- Minify CSS Files: Remove unnecessary spaces and comments for faster loading.
- Example tools: CSS Minifier, UglifyCSS.
- Use Logical File Naming: Organize CSS files based on functionality (e.g., buttons.css, layout.css).
- Optimize Media Queries: Implement responsive design directly in external stylesheets using media queries.
  - @media (max-width: 768px) {
  - body {
  - background-color: lightgray;
  - }
  - }

INTERNAL STYLE SHEET IN CSS

- Internal Style Sheet in CSSAn internal style sheet is a block of CSS code written directly within an HTML document using the <style> tag.
- It is typically placed inside the <head> section of the page and affects the styles of elements in that specific HTML document.

STRUCTURE OF AN INTERNAL STYLE SHEET

```
<!DOCTYPE html>
<html>
<head>
  <title>Internal CSS Example</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      background-color: #f4f4f4;
    }
    h1 {
      color: navy;
      text-align: center;
    }
 p {
      color: gray;
      font-size: 16px;
    }
  </style>
</head>
<body>
  <h1>Welcome to Internal CSS</h1>
  <p>This is an example of using internal styles.</p>
</body>
</html>
```

Internal CSS Example

File C:/Users/gaurav.paliwal/1.html

Welcome to Internal CSS

This is an example of using internal styles.

Type here to search

Web Programming | Web Programming... | Unit 3.pptx - Power... | Web Programming... | 1.html - Visual Stud... | Internal CSS Examp...

ENG 01:54 PM 07-01-2025

ADVANTAGES OF INTERNAL STYLE SHEETS

Advantage	Explanation
Easy to Implement	No need for external files; CSS is written directly within the HTML document.
Better Control	Style rules only affect the current HTML page.
Useful for Single Pages	Ideal for small websites or single-page projects that don't require multiple stylesheets.

DISADVANTAGES OF INTERNAL STYLE SHEETS

Disadvantage	Explanation
Not Reusable	Cannot be reused across multiple pages, leading to redundancy.
Increased File Size	Styles in the HTML file increase its overall size, potentially slowing down loading.
Overwrites Inline Styles	Inline styles take precedence if explicitly declared for an element.

COMBINING INTERNAL STYLE SHEETS WITH HTML

```
<!DOCTYPE html>
<html>
<head>
    <title>Internal CSS Example</title>
    <style>
        /* Styling the header */
        h1 {
            color: darkgreen;
            font-size: 30px;
            text-align: center;
        }

        /* Styling the paragraph */
        p {
            color: #333;
            line-height: 1.5;
            margin: 20px;
        }

        /* Styling a class */
        .highlight {
            background-color: yellow;
            font-weight: bold;
        }

        /* Styling an ID */
        #footer {
            color: white;
            background-color: black;
            padding: 10px;
            text-align: center;
        }
    </style>
</head>
<body>
    <h1>Welcome to the Styled Page</h1>
    <p>This paragraph is styled using <span class="highlight">internal CSS</span>.</p>
    <div id="footer">This is the footer section.</div>
</body>
</html>
```

Internal CSS Example
File C:/Users/gaurav.paliwal/1.html
Google Lens

Welcome to the Styled Page

This paragraph is styled using **internal CSS**.

This is the footer section.

Type here to search
Web Programming
Web Programming...
Unit 3.pptx - Power...
Web Programming...
1.html - Visual Stud...
Internal CSS Examp...
ENG
01:59 PM
07-01-2025

OVERRIDING PRECEDENCE

- When multiple CSS styles are applied, the following order of precedence is maintained:
  - Inline CSS: Styles applied directly within an HTML element using the style attribute.
  - Internal CSS: Styles defined in the <style> tag within the <head>.
  - External CSS: Styles applied from an external file using the <link> tag.

EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
    <title>CSS Precedence</title>
    <style>
        p {
            color: blue;
        }
    </style>
</head>
<body>
    <p style="color: red;">This text is red because of inline styles.</p>
</body>
</html>
```

CSS Precedence

File C:/Users/gaurav.paliwal/1.html

This text is red because of inline styles.

Type here to search

Web Programming | Web Programming... | Unit 3.pptx - Power... | Web Programming... | 1.html - Visual Stud... | CSS Precedence - G...

ENG 02:02 PM 07-01-2025

INLINE STYLE IN HTML

- Inline Style in HTML An inline style is used to apply CSS directly within an HTML element using the style attribute.
- It allows specific and immediate styling for a single element.

SYNTAX OF INLINE STYLE

- The style attribute is added to an HTML tag, and the CSS properties and values are defined as a string.
  - <element style="property: value; property: value;">

EXAMPLE OF INLINE STYLES

- <!DOCTYPE html>
- <html>
- <head>
- <title>Inline CSS Example</title>
- </head>
- <body>
- <h1 style="color: blue; font-size: 30px;">Welcome to Inline CSS</h1>
- This is a paragraph styled using inline CSS.
- </body>
- </html>

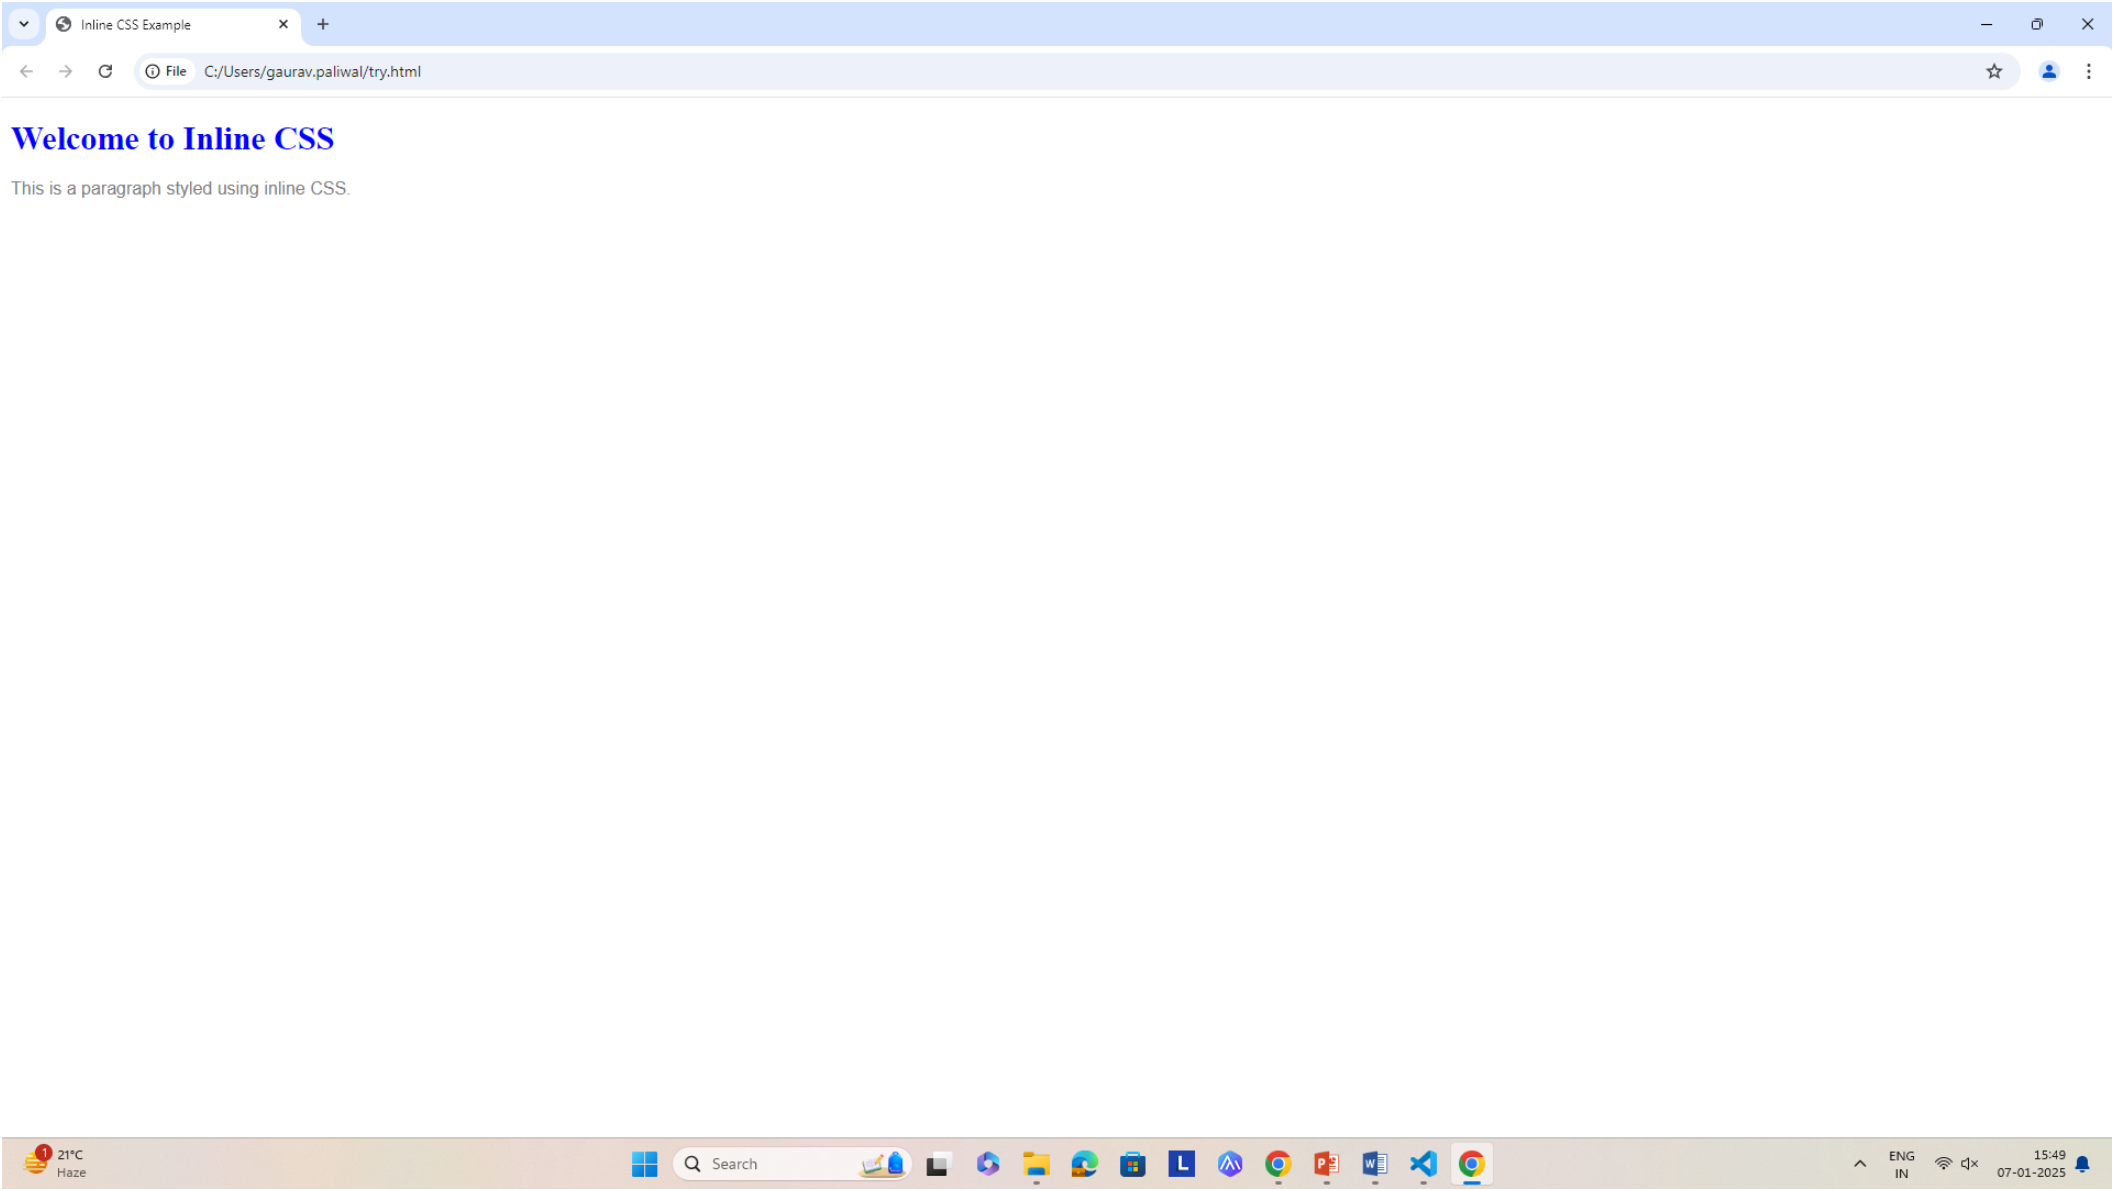
Inline CSS Example
File
C:/Users/gaurav.paliwal/try.html
Welcome to Inline CSS
This is a paragraph styled using inline CSS.
21°C
Haze
Search
ENG
IN
15:49
07-01-2025

ADVANTAGES OF INLINE STYLES

Advantage	Explanation
Quick Implementation	Ideal for quick, one-off styling for a single element.
Overrides External/Internal	Inline styles have the highest precedence over internal or external styles.
Simple Testing	Useful for testing or debugging small styling changes.

DISADVANTAGES OF INLINE STYLES

Disadvantage	Explanation
Not Reusable	The style cannot be reused for other elements, leading to redundant code.
Poor Maintainability	Difficult to manage when applied to many elements in larger projects.
Clutters HTML	Mixing style with content violates the principle of separating content and presentation.
Lack of Scalability	Inefficient for multi-element or multi-page projects.

COMMON SCENARIOS FOR USING INLINE STYLES

- One-off Style Adjustments: Quick changes for specific elements.
- Dynamic Styling via JavaScript: Inline styles can be added dynamically using JavaScript.
- Email Templates: Inline styles are often used in emails because not all email clients support external stylesheets.

EXAMPLE: INLINE STYLES FOR MULTIPLE ELEMENTS

```
<!DOCTYPE html>
<html>
<head>
    <title>Inline CSS Example</title>
</head>
<body>
    <h1 style="color: darkblue; text-align: center;">Header Styled with Inline CSS</h1>
    <p style="font-family: Verdana; font-size: 18px;">This is a paragraph with inline styling.</p>
    <button style="background-color: green; color: white; padding: 10px; border: none;">Click Me</button>
</body>
</html>
```

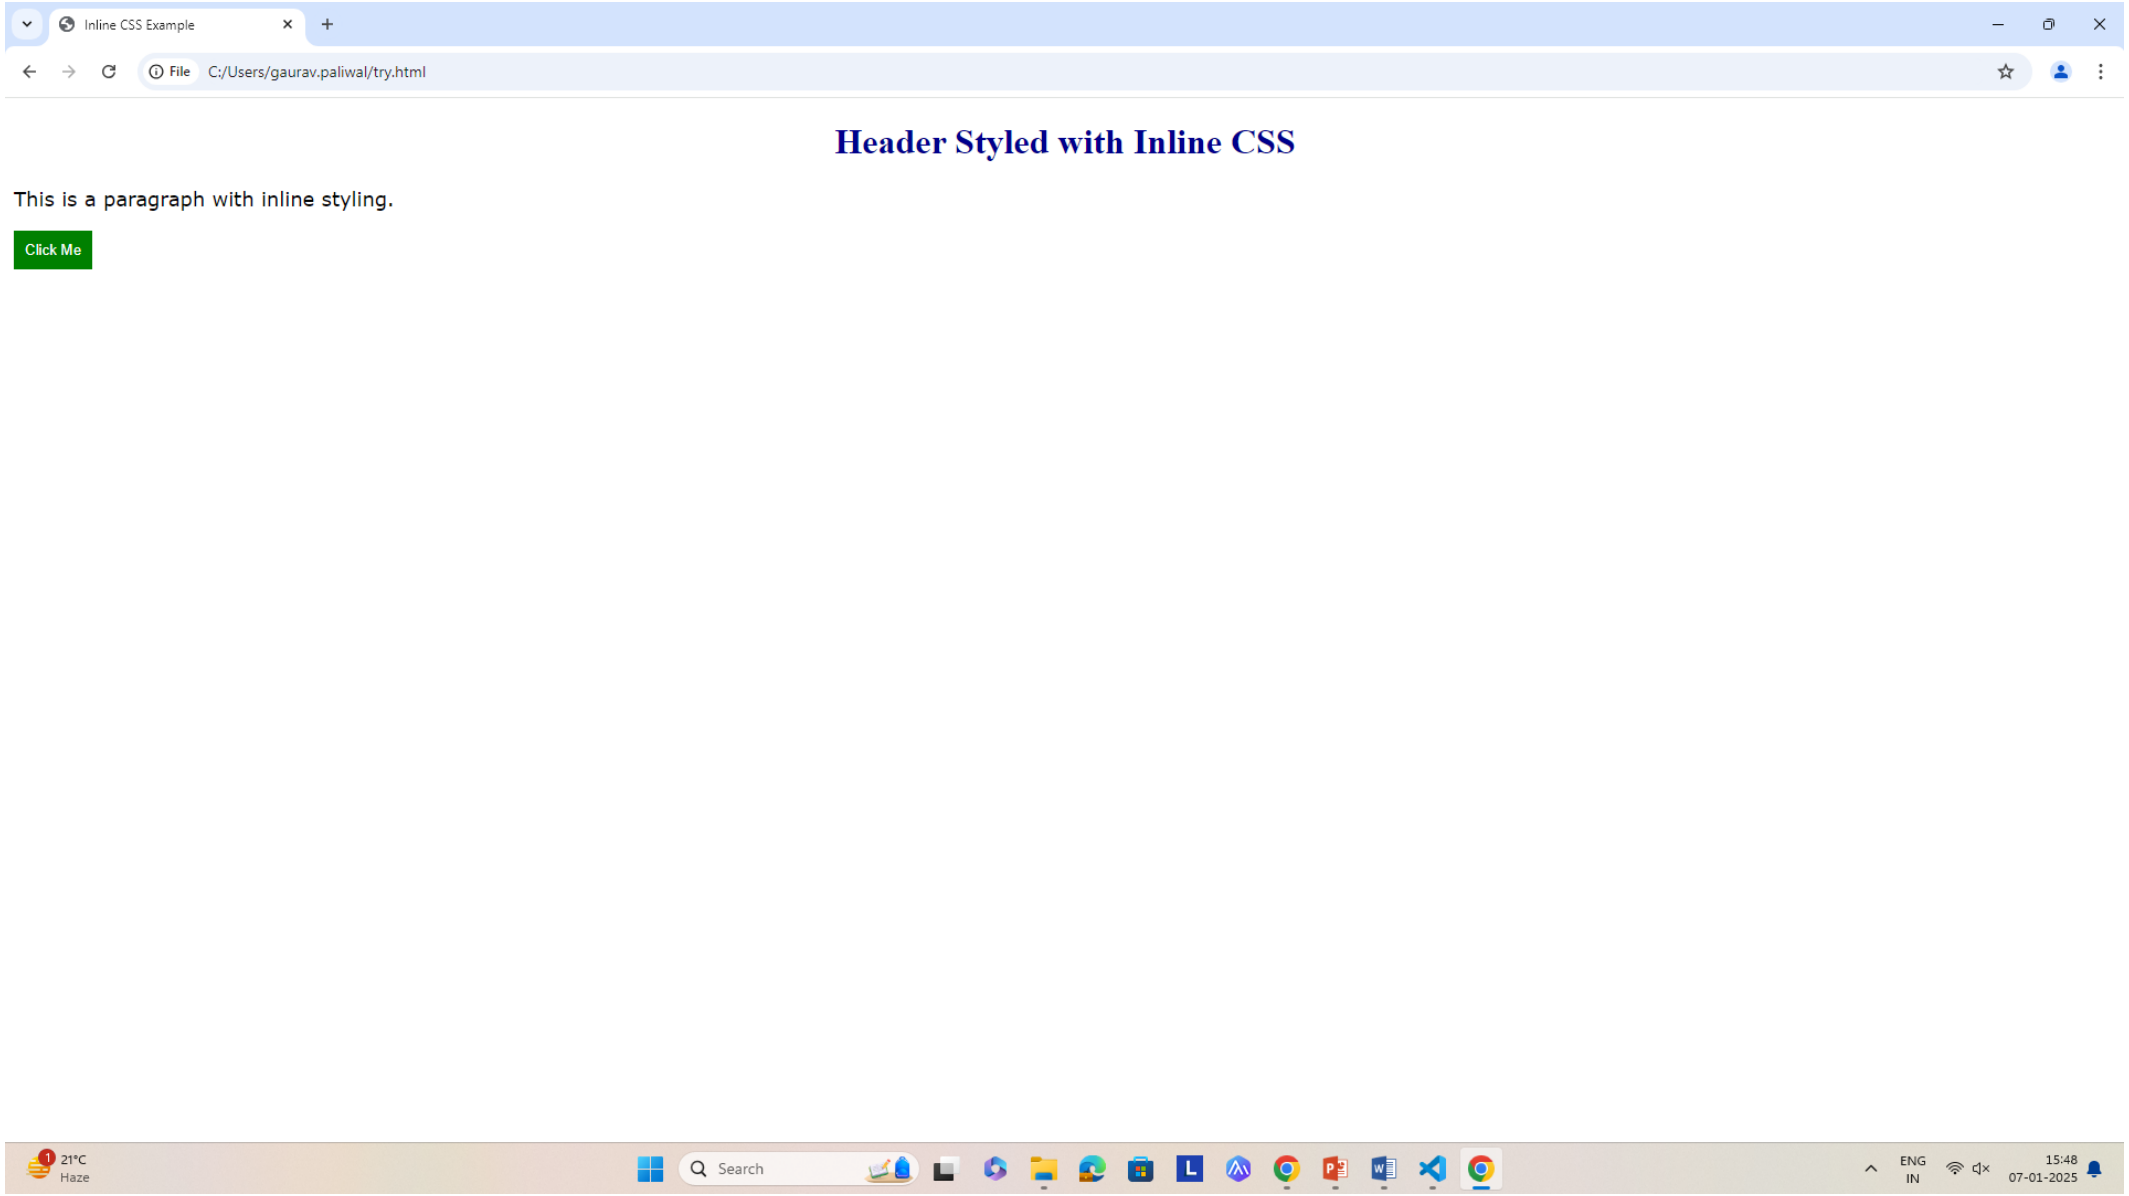
Inline CSS Example
File
C:/Users/gaurav.paliwal/try.html
Header Styled with Inline CSS
This is a paragraph with inline styling.
Click Me
21°C
Haze
Search
ENG
IN
15:48
07-01-2025

INLINE STYLES VS INTERNAL AND EXTERNAL STYLES

Aspect	Inline Style	Internal Style	External Style
Placement	Inside the element's style attribute.	In the <head> within <style>.	In a separate CSS file linked with <link>.
Reusability	Not reusable.	Only for the same HTML document.	Reusable across multiple HTML documents.
Maintenance	Hard to maintain for large projects.	Easier but limited to single pages.	Easiest for large projects.

BACKGROUND PROPERTY

- CSS provides various background-related properties to style the backgrounds of elements.
- Sets the background color of an element.
  - selector {
  - background-color: value;
  - }

EXAMPLES:

```
<!DOCTYPE html>
<html>
<head>
    <style>
        body {
            background-color: #f4f4f4; /* Light gray background */
        }
        div {
            background-color: rgb(173, 216, 230); /* Light blue */
            padding: 20px;
        }
 </style>
</head>
<body>
    <div>This div has a light blue background.</div>
</body>
</html>
```

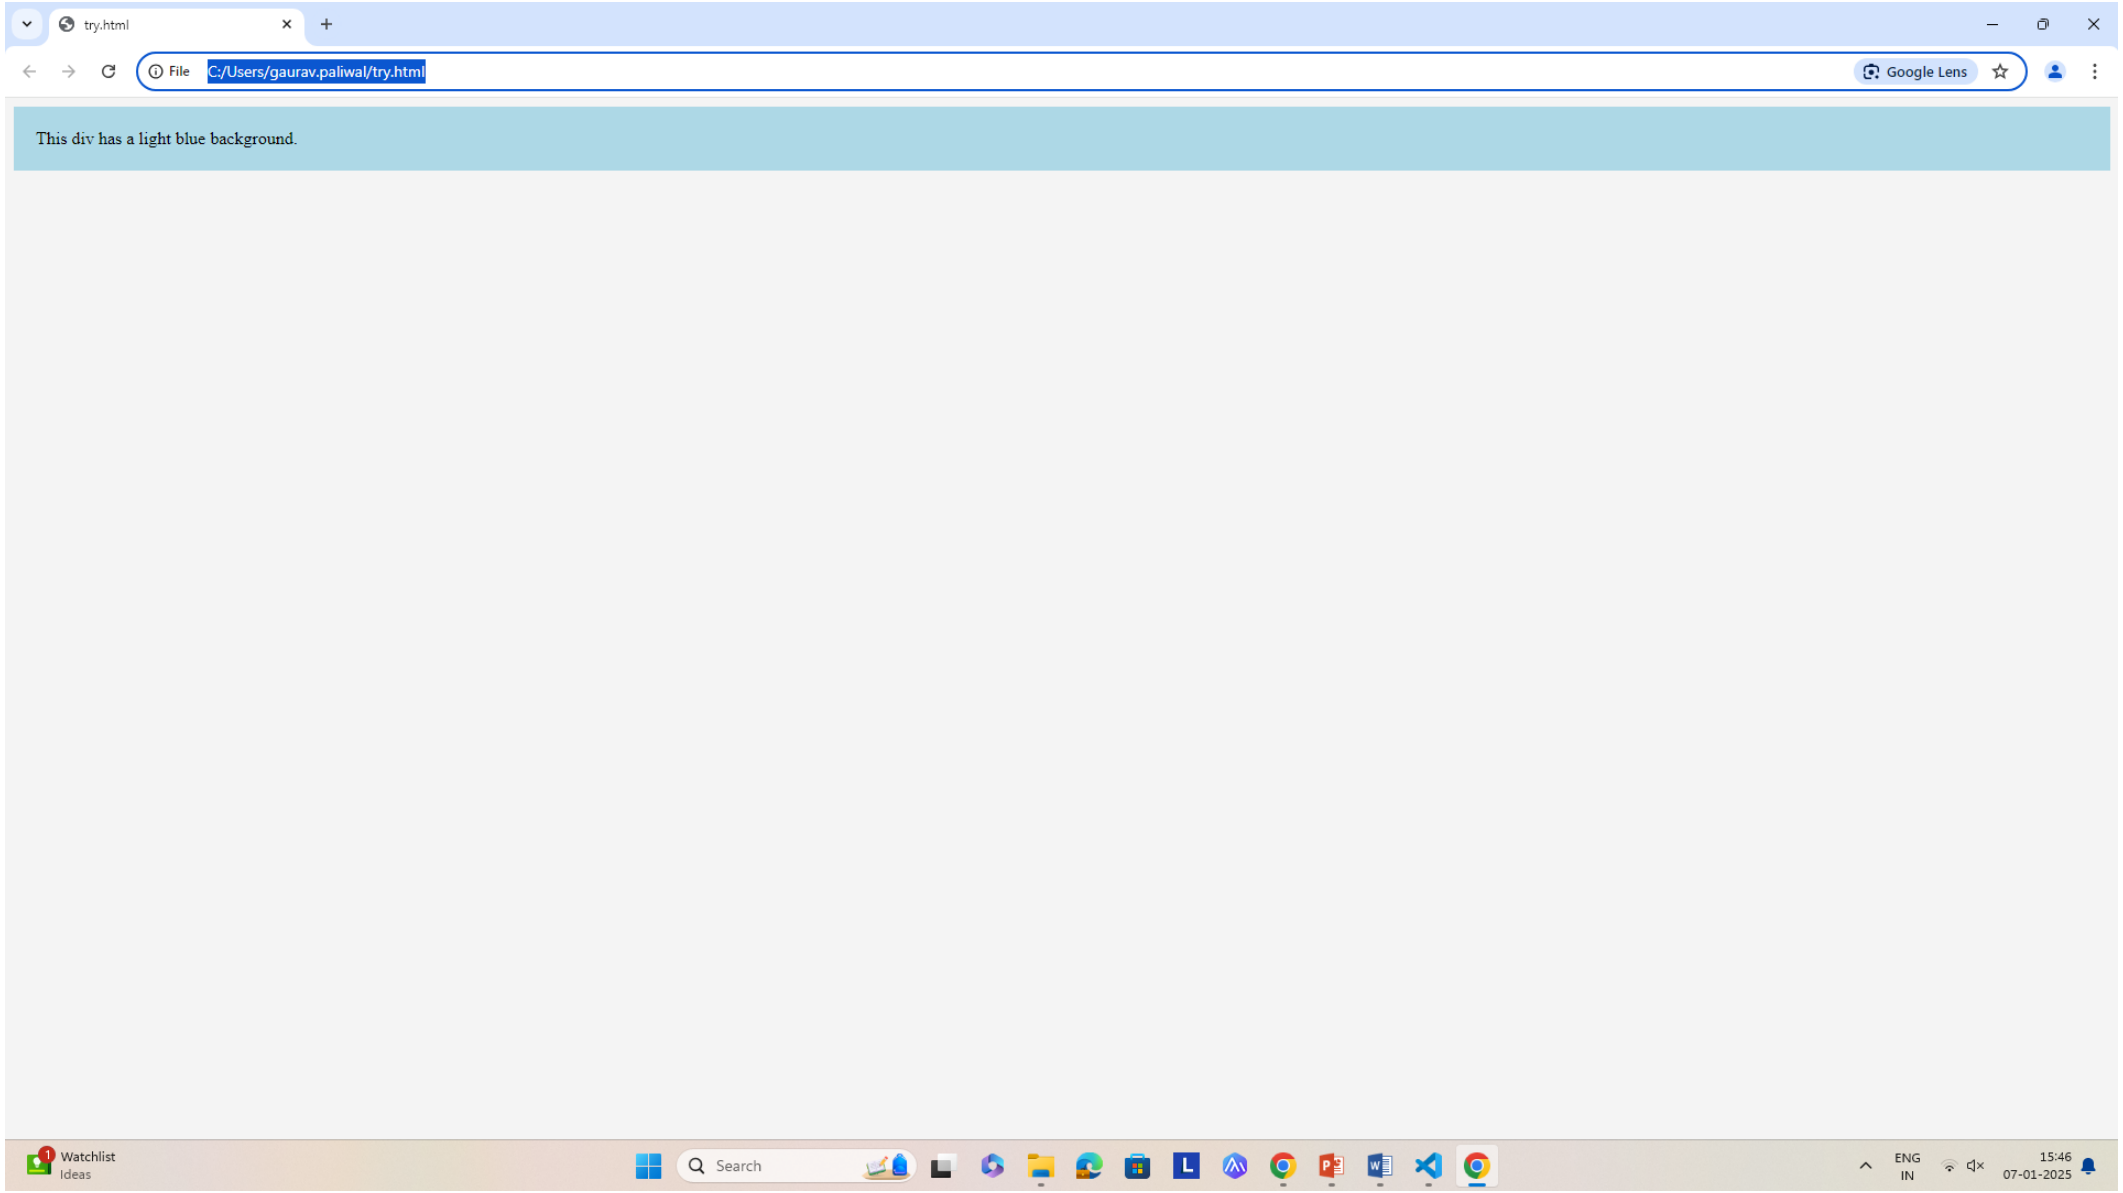
try.html
File
C:/Users/gaurav.paliwal/try.html
Google Lens
This div has a light blue background.
Watchlist
Ideas
Search
ENG
IN
15:46
07-01-2025

BACKGROUND-IMAGE

```
<!DOCTYPE html>
<html>
<head>
  <style>
    body {
      background-image: url('background.jpg');
      background-repeat: no-repeat;
      background-size: cover;
    }
  </style>
</head>
<body>
  <h1>Hello World</h1>
</body>
</html>
```

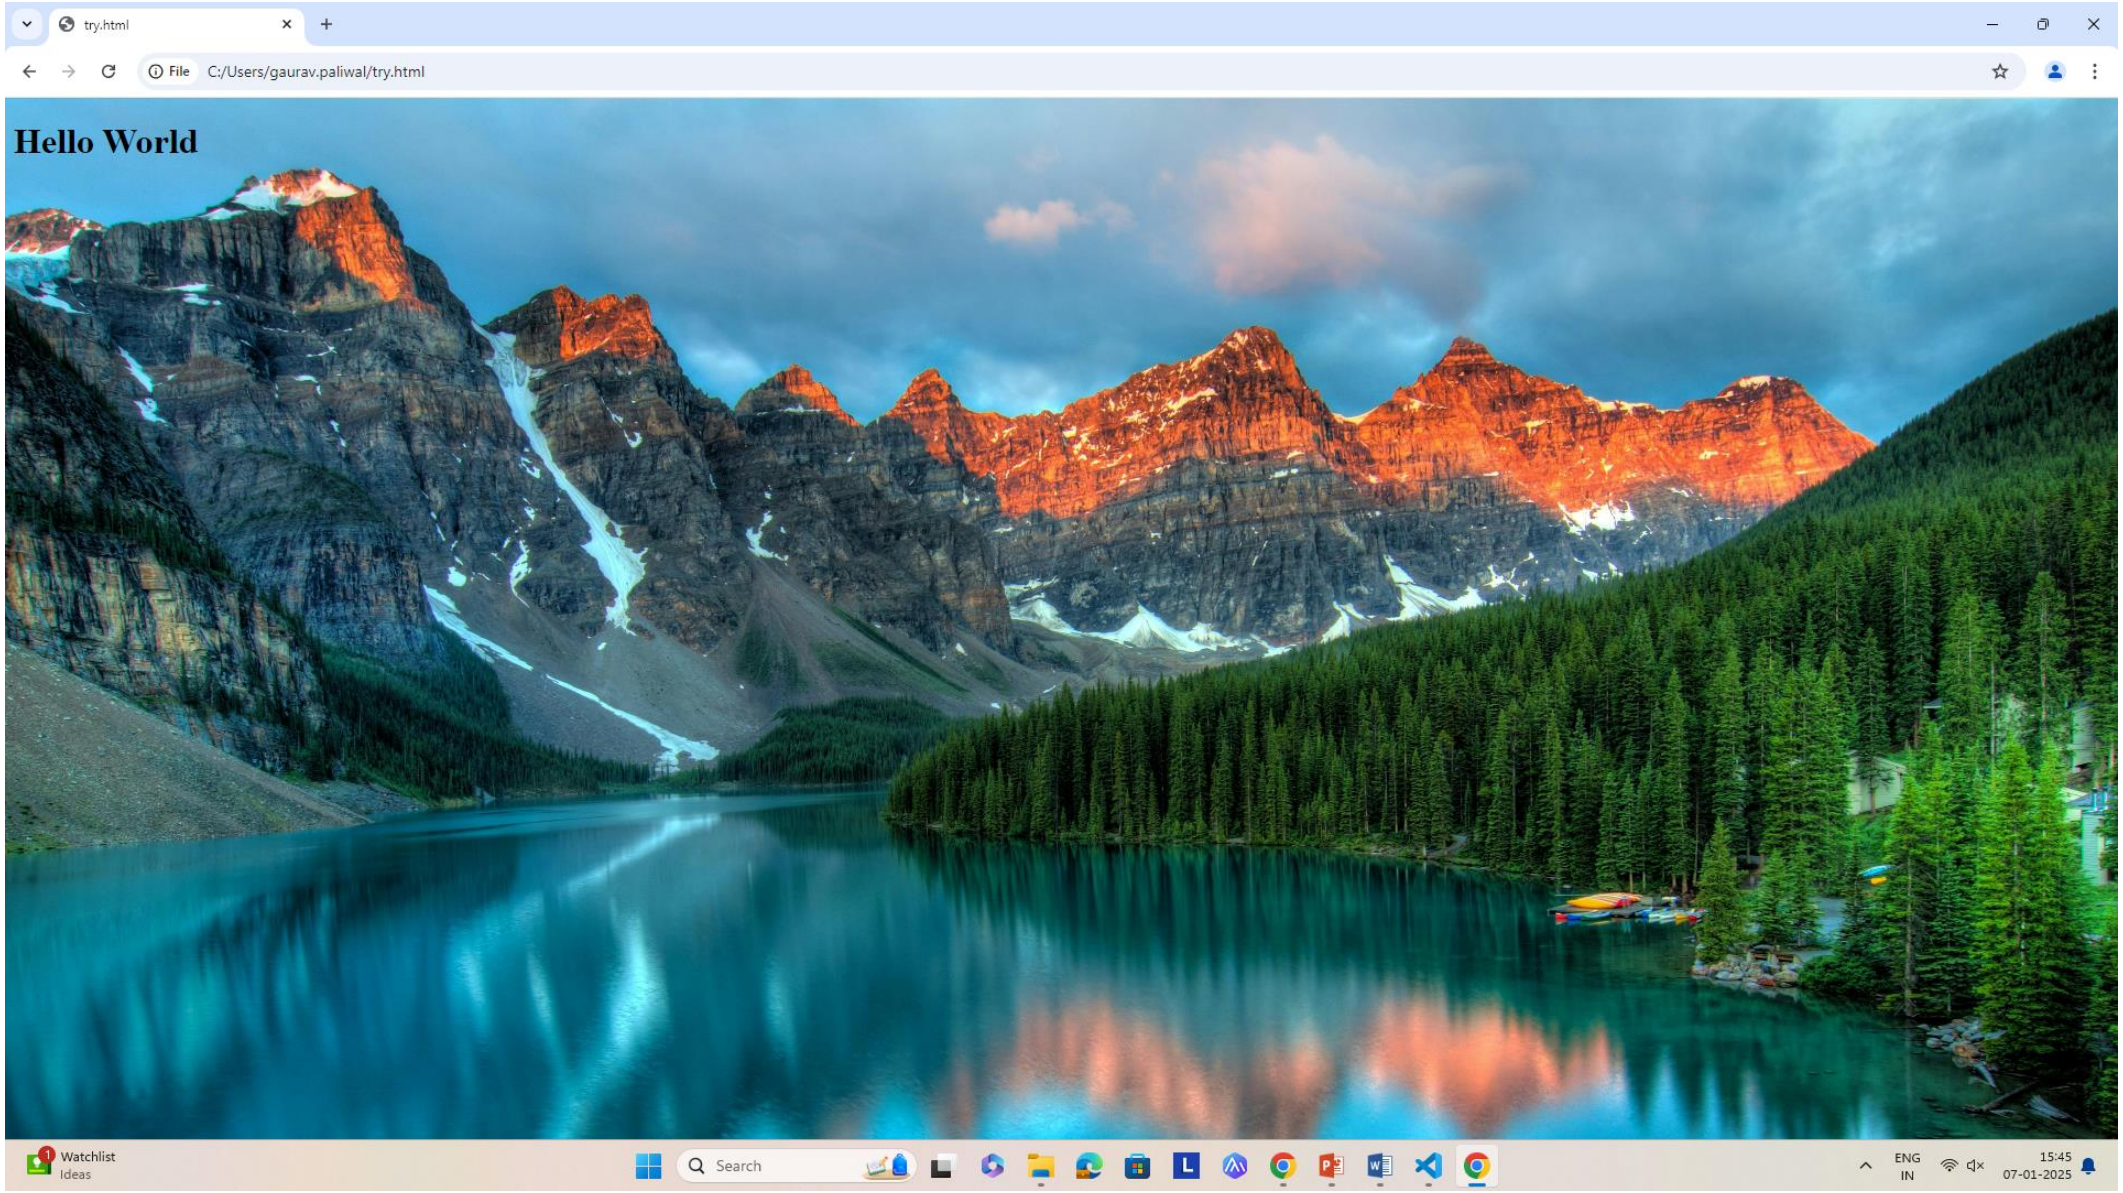
try.html
File
C:/Users/gaurav.paliwal/try.html
Hello World
Watchlist
Ideas
Search
ENG
IN
15:45
07-01-2025

KEY PROPERTIES FOR BACKGROUND IMAGES:

Property	Description	Example
background-repeat	Controls image repetition.	no-repeat, repeat, repeat-x, repeat-y
background-size	Scales the image.	cover, contain, auto, 100% 100%
background-position	Specifies the position of the image.	center, top right, 50% 50%
background-attachment	Fixes the background relative to the viewport.	scroll, fixed

BACKGROUND-GRADIENT

- Creates a gradient as the background of an element.
- **Linear Gradient**:
  - div {
  - background: linear-gradient(to right, red, yellow);
  - }

- **Radial Gradient**:
  - div {
  - background: radial-gradient(circle, red, yellow);
  - }

EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
    <style>
        div {
            height: 200px;
            background: linear-gradient(to bottom, #33ccff, #ff99cc);
        }
    </style>
</head>
<body>
    <div></div>
</body>
</html>
```

SHORTHAND FOR BACKGROUND

- CSS allows multiple background properties to be written in shorthand.
- **Syntax**:
  - selector {
  - background: [color] [image] [repeat] [attachment] [position] / [size];
  - }
- **Example**:
  - div {
  - background: #fff url('pattern.png') no-repeat fixed center / cover;
  - }

CSS FONTS

- CSS provides properties to define and customize fonts used in HTML elements.
- This includes setting font families, size, weight, style, spacing, and more.

COMMON FONT PROPERTIES

Property	Description	Example
font-family	Specifies the typeface or font.	font-family: Arial, sans-serif;
font-size	Sets the size of the font.	font-size: 16px;
font-style	Makes text italic, normal, or oblique.	font-style: italic;
font-weight	Adjusts the boldness of the font.	font-weight: bold;
line-height	Sets the space between lines.	line-height: 1.5;
letter-spacing	Sets the space between letters.	letter-spacing: 2px;
text-transform	Controls text capitalization (uppercase, lowercase, capitalize).	text-transform: uppercase;

FONT FAMILY

- The font-family property sets the font for text.
- Fonts are specified as a prioritized list, starting with the preferred font and including generic fallback fonts.
- Syntax:
  - font-family: "Preferred Font", "Fallback Font", generic-family;
- Example:
  - p {
  - font-family: "Arial", "Helvetica", sans-serif;
  - }

GENERIC FONT FAMILIES:

Generic Font Family	Description
serif	Fonts with small strokes (e.g., Times New Roman).
sans-serif	Clean fonts without strokes (e.g., Arial).
monospace	Fixed-width fonts (e.g., Courier New).
cursive	Stylized fonts (e.g., Comic Sans MS).
fantasy	Decorative or playful fonts.

FONT SIZE

Unit	Example	Description
px	font-size: 16px;	Absolute size in pixels.
%	font-size: 150%;	Relative to the parent element's font size.
em	font-size: 1.2em;	Relative to the parent font size (1em = 100%).
rem	font-size: 1.5rem;	Relative to the root font size.
vw	font-size: 5vw;	Relative to the viewport width.

EXAMPLE:

```
h1 {
    font-size: 24px;
}
p {
    font-size: 1.2em; /* 1.2 times the parent font size */
}
```

FONT STYLE

- The font-style property specifies the style of the text.

Value	**Description**
normal	Default text style.
italic	Italicizes the text.
oblique	Slanted version of text.

FONT WEIGHT

- The font-weight property specifies the thickness of the font.

Value	**Description**
normal	Standard weight (default).
bold	Makes text bold.
bolder	Bolder than the parent element's weight.
lighter	Lighter than the parent element's weight.
100 to 900	Numeric values (100=thin, 900=bold).

SHORTHAND FOR FONT PROPERTIES

- The font property is a shorthand for several font properties.
- Syntax:
  - font: font-style font-variant font-weight font-size/line-height font-family;
- Example:
  - h1 {
  - font: italic small-caps bold 18px/24px "Times New Roman", serif;
  - }

PRACTICAL EXAMPLE

```
<!DOCTYPE html>
<html>
<head>
  <title>Font Properties Example</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      font-size: 16px;
      line-height: 1.6;
    }
    h1 {
      font-family: 'Georgia', serif;
      font-size: 32px;
      font-weight: bold;
      text-transform: capitalize;
    }
p {
      font-size: 14px;
      color: gray;
      letter-spacing: 1px;
    }
  </style>
</head>
<body>
  <h1>CSS Fonts</h1>
  <p>This is an example of applying font properties in CSS.</p>
</body>
</html>
```

CSS AND HTML: WORKING WITH IMAGES

- Images enhance the visual appeal and content of a webpage.
- Using HTML and CSS, you can embed, style, and optimize images effectively.

ADDING IMAGES IN HTML

- The <img> tag is used to embed images in an HTML document.
- It is an empty tag and requires the src attribute to define the image's source.
  - <img src="image.jpg" alt="Description of Image">
- Key Attributes of the <img> Tag:

Attribute	**Description**
src	Specifies the path (relative or absolute) to the image.
alt	Provides alternative text for the image, useful for accessibility and SEO.
width	Specifies the width of the image in pixels or percentages.
height	Specifies the height of the image in pixels or percentages.
title	Adds a tooltip when the user hovers over the image.

STYLING IMAGES WITH CSS

- Setting Image Dimensions
  - <img src="image.jpg" alt="Image" style="width: 300px; height: auto;">

- Adding Borders
  - img {
  - border: 5px solid #000; /* Black solid border */
  - border-radius: 10px; /* Rounded corners */
  - }

- Adding Images as Links
  - <a href="https://example.com">
  - <img src="image.jpg" alt="Clickable Image" width="200">
  - </a>

ADVANCED EXAMPLE: RESPONSIVE GALLERY WITH HOVER EFFECTS

```
<!DOCTYPE html>
<html>
<head>
    <title>Image Gallery</title>
    <link rel="stylesheet" href="styles.css">
</head>
<body>
    <div class="gallery">
        <img src="image1.jpg" alt="Gallery Image 1">
        <img src="image2.jpg" alt="Gallery Image 2">
        <img src="image3.jpg" alt="Gallery Image 3">
    </div>
</body>
</html>
```

```
.gallery {
    display: flex;
    gap: 10px;
}
.gallery img {
    width: 200px;
    height: 150px;
    border-radius: 5px;
    transition: transform 0.3s ease-in-out;
}
.gallery img:hover {
    transform: scale(1.1); /* Zoom effect on hover */
    box-shadow: 0 4px 10px rgba(0, 0, 0, 0.5);
}
```

COMPLETE EXAMPLE

```
<!DOCTYPE html>
<html>
<head>
  <title>Image Example</title>
  <style>
    body {
      font-family: Arial, sans-serif;
    }
    .banner {
      width: 100%;
      height: 300px;
      background-image: url('banner.jpg');
      background-size: cover;
      background-position: center;
    }
.responsive-img {
      width: 100%;
      max-width: 600px;
      height: auto;
      border: 2px solid #ccc;
      border-radius: 10px;
    }
  </style>
</head>
<body>
  <div class="banner"></div>
  <h1>Welcome to the Image Example</h1>
  <p>This image is responsive:</p>
  <img class="responsive-img" src="landscape.jpg" alt="Beautiful Landscape">
</body>
</html>
```

Image Example

File C:/Users/gaurav.paliwal/try.html

Welcome to the Image Example

This image is responsive:

Breaking news
Election Commis...

Search

ENG
IN

15:43
07-01-2025