


# Training TR-102 Day 3 Report

13<sup>th</sup> June, 2024

The eighth day of the training focused on introducing OWL, along with VOWL, and creating RDFs using it.

## Introduction to OWL

The W3C Web Ontology Language (OWL) is a Semantic Web language designed to represent rich and complex knowledge about things, groups of things, and relations between things.

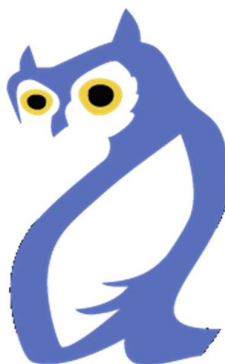

- There are two versions of OWL available:
  - **OWL1(Web Ontology Language 1.0):**
    - Enables ontology creation and sharing on the Semantic Web; more expressive than RDF Schema (RDFS).
    - Features include defining classes, properties (object and datatype), member restrictions, and RDF/RDFS compatibility.
  - **OWL2(Web Ontology Language 2.0):**
    - Extends OWL1 with new constructors (property chains, disjoint unions) and enhanced datatype support.

- Introduces better metadata annotations, profiles (EL, QL, RL), and maintains backward compatibility with OWL1.
- OWL2 is presently used.
- **Ontologies:** Ontologies are described as a way of showing the properties of a subject area and how they are related, by defining a set of concepts and categories that represent the subject.
- **Triples of OWL:** OWL also uses triples similar to RDF, covering concepts, relationships, and instances.
  - **Concepts** represent a set of classes or entities or things within a domain, which are used to classify individuals or other classes or a combination of both.
  - **Instances** are used to refer to the things represented by the concept. It may include concrete objects such as people, animals, tables or abstract individuals such as numbers and words.
  - **Relationship** specifies how objects are related to one another.

## Introduction to VOWL

VOWL (Visual Notations for OWL Ontologies) is a graphical approach to represent OWL ontologies visually. It uses symbols and shapes to show classes, properties, relationships, and complex chains of properties. VOWL enhances understanding, communication, and collaboration among stakeholders by providing an intuitive way to navigate and comprehend complex ontological structures. It's widely used in Semantic Web applications to make ontology development and usage more accessible and effective.

- Various architectural level RDFs were created using VOWL.