

```
addition.R x
Source on Save
Run
Source

1 num1 = as.integer(readline(prompt = "Enter first number: "))
2 num2 = as.integer(readline(prompt = "Enter second number: "))
3 num3 = num1 + num2
4 print(num3)

4:12 (Top Level) R Script

Console Terminal Background Jobs
R - R 4.6.1 - ~/
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[Workspace loaded from ~/.RData]

> source("D:/SSE/DWDM/addition.R", echo = TRUE)

> num1 = as.integer(readline(prompt = "Enter first number: "))
Enter first number: 5

> num2 = as.integer(readline(prompt = "Enter second number: "))
Enter second number: 8

> num3 = num1 + num2

> print(num3)
[1] 13
> |
```

```
subtraction.R x
Source on Save
Run
Source

1 num1 = as.integer(readline(prompt = "Enter first number: "))
2 num2 = as.integer(readline(prompt = "Enter second number: "))
3 num3 = num1-num2
4 print(num3)

4:12 (Top Level) R Script

Console Terminal Background Jobs
R - R 4.6.1 - ~/

> num3 = num1 + num2

> print(num3)
[1] 13
> source("D:/SSE/DWDM/subtraction.R", echo = TRUE)

> num1 = as.integer(readline(prompt = "Enter first number: "))
Enter first number: 3

> num2 = as.integer(readline(prompt = "Enter second number: "))
Enter second number: 2

> num3 = num1-num2

> print(num3)
[1] 1
> |
```

```
multiplication.R
1 a = 10
2 b = 3
3 mul = a * b
4 print(paste("Multiplication:", mul))

4:37 (Top Level) R Script

Console Terminal Background Jobs
R 4.6.1 · ~/
Enter second number: 2

> num3 = num1-num2

> print(num3)
[1] 1
>
> source("D:/SSE/DWDM/multiplication.R", echo = TRUE)

> a = 10

> b = 3

> mul = a * b

> print(paste("Multiplication:", mul))
[1] "Multiplication: 30"
>
```

```
division.R
1 a = 10
2 b = 3
3 div = a / b
4 print(paste("Division:", div))

4:29 (Top Level) R Script

Console Terminal Background Jobs
R 4.6.1 · ~/

> b = 3

> mul = a * b

> print(paste("Multiplication:", mul))
[1] "Multiplication: 30"
> source("D:/SSE/DWDM/division.R", echo = TRUE)

> a = 10

> b = 3

> div = a / b

> print(paste("Division:", div))
[1] "Division: 3.33333333333333"
>
```

```
odd_even.R x
Source on Save
Run
Source

1 num=as.integer(readline(prompt="Enter a number:"))
2 if(num%%2==0)
3 {
4   print("Even")
5 }else{
6   print("Odd")
7 }
```

5:6 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 ~/\

```
> div = a / b

> print(paste("Division:", div))
[1] "Division: 3.33333333333333"
> source("D:/SSE/DWDM/odd_even.R", echo = TRUE)

> num=as.integer(readline(prompt="Enter a number:"))
Enter a number:5

> if(num%%2==0)
+ {
+   print("Even")
+ }else{
+   print("Odd")
+ }
[1] "Odd"
> |
```

```
mean.R x
Source on Save
Run
Source

1 names=c("siri","mahi","chimu")
2 age=c(23,24,25)
3 marks=c(88,78,25)
4 df=data.frame(names,age,marks)
5 mean(df$age)
6 write.csv(df,"datafr.csv")
```

6:27 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 ~/\

```
+ print("Odd")
+ }
[1] "Odd"
> source("D:/SSE/DWDM/mean.R", echo = TRUE)

> names=c("siri","mahi","chimu")

> age=c(23,24,25)

> marks=c(88,78,25)

> df=data.frame(names,age,marks)

> mean(df$age)
[1] 24

> write.csv(df,"datafr.csv")
> |
```

```
mean.R × median.R ×
Source on Save
Run
Source

1 names=c("siri","mah","chimu")
2 age=c(23,24,25)
3 marks=c(88,78,25)
4 df=data.frame(names,age,marks)
5 median(df$age)
6 write.csv(df,"datafr.csv")

6:1 (Top Level) R Script

Console Terminal Background Jobs
R 4.6.1 ~
[1] 24

> write.csv(df,"datafr.csv")
> source("D:/SSE/DWM/median.R", echo = TRUE)

> names=c("siri","mah","chimu")

> age=c(23,24,25)

> marks=c(88,78,25)

> df=data.frame(names,age,marks)

> median(df$age)
[1] 24

> write.csv(df,"datafr.csv")
>
```

```
mean.R × median.R × mode.R ×
Source on Save
Run
Source

1 names=c("siri","mah","chimu")
2 age=c(23,24,25)
3 marks=c(88,78,25)
4 df=data.frame(names,age,marks)
5
6 age_mode = names(table(df$age))[table(df$age) == max(table(df$age))]
7 marks_mode = names(table(df$marks))[table(df$marks) == max(table(df$marks))]
8
9 as.numeric(age_mode)
10 as.numeric(marks_mode)
11

11:1 (Top Level) R Script

Console Terminal Background Jobs
R 4.6.1 ~
> names=c("siri","mah","chimu")

> age=c(23,24,25)

> marks=c(88,78,25)

> df=data.frame(names,age,marks)

> age_mode = names(table(df$age))[table(df$age) == max(table(df$age))]

> marks_mode = names(table(df$marks))[table(df$marks) == max(table(df$marks))]

> as.numeric(age_mode)
[1] 23 24 25

> as.numeric(marks_mode)
[1] 25 78 88

>
```

```
summary.R x
Source on Save
Run
Source

1 names=c("siri","mah","chimu")
2 age=c(23,24,25)
3 marks=c(88,78,25)
4 df=data.frame(names,age,marks)
5
6 summary(df)
7

6:12 (Top Level) R Script

Console Terminal Background Jobs

R R 4.6.1 ~ /

> names=c("siri","mah","chimu")
> age=c(23,24,25)
> marks=c(88,78,25)
> df=data.frame(names,age,marks)
> summary(df)
      names      age      marks
Length :3      Min. :23.0   Min. :25.00
N.unique :3      1st Qu.:23.5   1st Qu.:51.50
N.blank :0      Median :24.0   Median :78.00
Min.nchar:4      Mean :24.0   Mean :63.67
Max.nchar:5      3rd Qu.:24.5   3rd Qu.:83.00
                        Max. :25.0   Max. :88.00
> |
```

```
go3.R x
Source on Save
Run
Source

1 x <- as.integer(readline(prompt = "Enter first number :"))
2 y <- as.integer(readline(prompt = "Enter second number :"))
3 z <- as.integer(readline(prompt = "Enter third number :"))
4 if (x > y && x > z) {
5   print(paste("Greatest is :", x))
6 } else if (y > z) {
7   print(paste("Greatest is :", y))
8 } else{
9   print(paste("Greatest is :", z))
10 }
11

3:48 (Top Level) R Script

Console Terminal Background Jobs

R R 4.6.1 ~ /

> x <- as.integer(readline(prompt = "Enter first number :"))
Enter first number :2
> y <- as.integer(readline(prompt = "Enter second number :"))
Enter second number :6
> z <- as.integer(readline(prompt = "Enter third number :"))
Enter third number :7
> if (x > y && x > z) {
+   print(paste("Greatest is :", x))
+ } else if (y > z) {
+   print(paste("Greatest is :", y))
+ } else{
+   print(paste("Gre ..." ... [TRUNCATED])
[1] "Greatest is : 7"
> |
```

```
ct.R x
Source on Save
Run
Source

1 names<-c("siri","mahi","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 IQR(df $age)
6 write.csv(df,"datafr.csv")
7

6:1 (Top Level) R Script

Console Terminal Background Jobs
R R 4.6.1 ~ /
+ } else{
+ print(paste("Gre ..." ... [TRUNCATED])
[1] "Greatest is : 7"
> source("D:/SSE/DWDM/ct.R", echo = TRUE)

> names<-c("siri","mahi","chiru")

> age<-c(23,24,25)

> marks<-c(88,78,25)

> df<-data.frame(names,age,marks)

> IQR(df $age)
[1] 1

> write.csv(df,"datafr.csv")
> |
```

```
ct.R x ct2.R x
Source on Save
Run
Source

1 names<-c("siri","mahi","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 quantile(df $age)
6 write.csv(df,"datafr.csv")
7

6:1 (Top Level) R Script

Console Terminal Background Jobs
R R 4.6.1 ~ /
> write.csv(df,"datafr.csv")
> source("D:/SSE/DWDM/ct2.R", echo = TRUE)

> names<-c("siri","mahi","chiru")

> age<-c(23,24,25)

> marks<-c(88,78,25)

> df<-data.frame(names,age,marks)

> quantile(df $age)
 0% 25% 50% 75% 100%
23.0 23.5 24.0 24.5 25.0

> write.csv(df,"datafr.csv")
> |
```

```
ct.R x ct2.R x ct3.R x
Source on Save Run Source
1 names<-c("siri","mahi","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 mid_range <- function(x) (max(x) + min(x)) / 2
6 mid_range(df$age)
7 write.csv(df,"datafr.csv")
8

7:1 (Top Level) R Script
Console Terminal Background Jobs
R - R 4.6.1 - ~/
> write.csv(df,"datafr.csv")
> source("D:/SSE/DWDM/ct3.R", echo = TRUE)

> names<-c("siri","mahi","chiru")

> age<-c(23,24,25)

> marks<-c(88,78,25)

> df<-data.frame(names,age,marks)

> mid_range <- function(x) (max(x) + min(x)) / 2

> mid_range(df$age)
[1] 24

> write.csv(df,"datafr.csv")
> |
```

```
zscore.R x
Source on Save Run Source
1 diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")
2 A <- c(diabetest1$Age)
3 Mean <- mean(A)
4 Std <- sd(A)
5 Zscore <- (A - Mean) / Std
6 Zscore
7

1:1 (Top Level) R Script
Console Terminal Background Jobs
R - R 4.6.1 - ~/
[66/] 3.125/1351 0.574/4333 0.82984034 0.99990502 1.34003438 -1.0408/112
[673] 1.16996970 -0.95583878 2.95564883 -0.19054773 1.68016374 -0.70074177
[679] -0.70074177 -0.87080644 -0.95583878 -0.61570943 -0.95583878 -0.53067709
[685] 3.04068117 -0.70074177 -0.95583878 -0.36061241 -0.87080644 1.08493736
[691] 0.06454929 0.91487268 -0.87080644 0.82984034 -0.70074177 0.82984034
[697] -0.19054773 -0.95583878 -0.44564475 -0.61570943 -0.61570943 1.34003438
[703] 1.59513140 0.65977566 -0.53067709 -0.44564475 -0.27558007 -0.95583878
[709] 0.99990502 -0.87080644 -0.78577411 0.57474333 0.40467865 -1.04087112
[715] -0.10551539 0.06454929 -0.19054773 1.93526076 -0.78577411 1.59513140
[721] 0.06454929 -1.04087112 0.74480800 0.74480800 0.99990502 0.40467865
[727] -0.70074177 -0.95583878 -0.95583878 -0.95583878 0.06454929 -0.95583878
[733] -0.78577411 -0.95583878 1.68016374 -0.44564475 -1.04087112 0.74480800
[739] -1.04087112 0.74480800 1.25500204 -0.61570943 -0.95583878 0.99990502
[745] 0.48971099 1.08493736 -0.53067709 -0.10551539 0.23461397 1.42506672
[751] -0.95583878 -0.44564475 -0.70074177 -0.61570943 0.99990502 0.31964631
[757] 0.48971099 1.59513140 -0.61570943 2.78558415 -0.95583878 0.82984034
[763] -0.02048305 2.53048713 -0.53067709 -0.27558007 1.16996970 -0.87080644
> |
```

```
minz.R
1 diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")
2 A <- c(diabetest1$Age)
3 Min <- min(A)
4 Min
5

1:1 (Top Level) R Script

Console Terminal Background Jobs
R 4.6.1 ~
[727] -0.70074177 -0.95583878 -0.95583878 -0.95583878 0.06454929 -0.95583878
[733] -0.78577411 -0.95583878 1.68016374 -0.44564475 -1.04087112 0.74480800
[739] -1.04087112 0.74480800 1.25500204 -0.61570943 -0.95583878 0.99990502
[745] 0.48971099 1.08493736 -0.53067709 -0.10551539 0.23461397 1.42506672
[751] -0.95583878 -0.44564475 -0.70074177 -0.61570943 0.99990502 0.31964631
[757] 0.48971099 1.59513140 -0.61570943 2.78558415 -0.95583878 0.82984034
[763] -0.02048305 2.53048713 -0.53067709 -0.27558007 1.16996970 -0.87080644
> source("D:/SSE/DWDM/minz.R", echo = TRUE)

> diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")

> A <- c(diabetest1$Age)

> Min <- min(A)

> Min
[1] 21
>
```

```
minz.R maxz.R
1 diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")
2 A <- c(diabetest1$Age)
3 Max <- max(A)
4 print(Max)

4:11 (Top Level) R Script

Console Terminal Background Jobs
R 4.6.1 ~
> A <- c(diabetest1$Age)

> Min <- min(A)

> Min
[1] 21
> source("D:/SSE/DWDM/maxz.R", echo = TRUE)

> diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")

> A <- c(diabetest1$Age)

> Max <- max(A)

> print(Max)
[1] 81
>
```



```
minz.R x maxz.R x minmaxz.R x
Source on Save Run
1 diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")
2 A <- c(diabetest1$Age)
3 Min <- min(A)
4 Max <- max(A)
5 MinMax <- (A - Min) / (Max - Min)
6 MinMax
7 |

7:1 (Top Level) R Script

Console Terminal Background Jobs
R 4.6.1 ~ /
[652] 0.10000000 0.11666667 0.10000000 0.01666667 0.06666667 0.01666667 0.33333333
[659] 0.50000000 0.10000000 0.55000000 0.01666667 0.36666667 0.31666667 0.31666667
[666] 0.05000000 0.81666667 0.31666667 0.36666667 0.40000000 0.46666667 0.00000000
[673] 0.43333333 0.01666667 0.78333333 0.16666667 0.53333333 0.06666667 0.06666667
[680] 0.03333333 0.01666667 0.08333333 0.01666667 0.10000000 0.80000000 0.06666667
[687] 0.01666667 0.13333333 0.03333333 0.41666667 0.21666667 0.38333333 0.03333333
[694] 0.36666667 0.06666667 0.36666667 0.16666667 0.01666667 0.11666667 0.08333333
[701] 0.08333333 0.46666667 0.51666667 0.33333333 0.10000000 0.11666667 0.15000000
[708] 0.01666667 0.40000000 0.03333333 0.05000000 0.31666667 0.28333333 0.00000000
[715] 0.18333333 0.21666667 0.16666667 0.58333333 0.05000000 0.51666667 0.21666667
[722] 0.00000000 0.35000000 0.35000000 0.40000000 0.28333333 0.06666667 0.01666667
[729] 0.01666667 0.01666667 0.21666667 0.01666667 0.05000000 0.01666667 0.53333333
[736] 0.11666667 0.00000000 0.35000000 0.00000000 0.35000000 0.45000000 0.08333333
[743] 0.01666667 0.40000000 0.30000000 0.41666667 0.10000000 0.18333333 0.25000000
[750] 0.48333333 0.01666667 0.11666667 0.06666667 0.08333333 0.40000000 0.26666667
[757] 0.30000000 0.51666667 0.08333333 0.75000000 0.01666667 0.36666667 0.20000000
[764] 0.70000000 0.10000000 0.15000000 0.43333333 0.03333333
> |
```

```
minz.R x maxz.R x minmaxz.R x meanz.R x
Source on Save Run
1 diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")
2 A <- c(diabetest1$Age)
3 Mean <- mean(A)
4 Mean
5 |

5:1 (Top Level) R Script




Console Terminal Background Jobs
R 4.6.1 ~ /
[722] 0.00000000 0.35000000 0.35000000 0.40000000 0.28333333 0.06666667 0.01666667
[729] 0.01666667 0.01666667 0.21666667 0.01666667 0.05000000 0.01666667 0.53333333
[736] 0.11666667 0.00000000 0.35000000 0.00000000 0.35000000 0.45000000 0.08333333
[743] 0.01666667 0.40000000 0.30000000 0.41666667 0.10000000 0.18333333 0.25000000
[750] 0.48333333 0.01666667 0.11666667 0.06666667 0.08333333 0.40000000 0.26666667
[757] 0.30000000 0.51666667 0.08333333 0.75000000 0.01666667 0.36666667 0.20000000
[764] 0.70000000 0.10000000 0.15000000 0.43333333 0.03333333
> source("D:/SSE/DWDM/meanz.R", echo = TRUE)

> diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")

> A <- c(diabetest1$Age)

> Mean <- mean(A)

> Mean
[1] 33.24089
> |
```

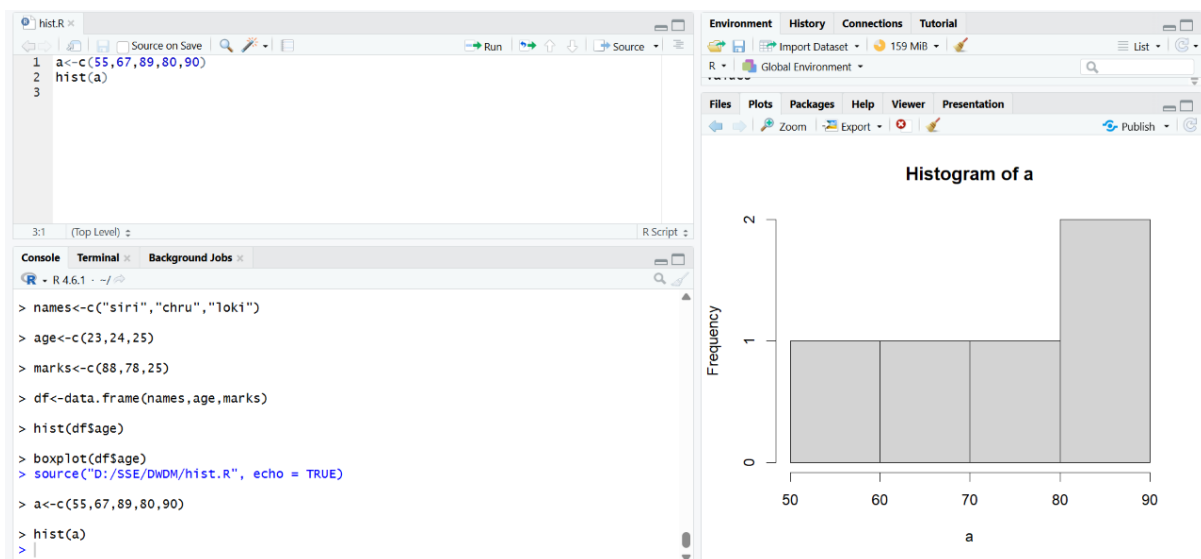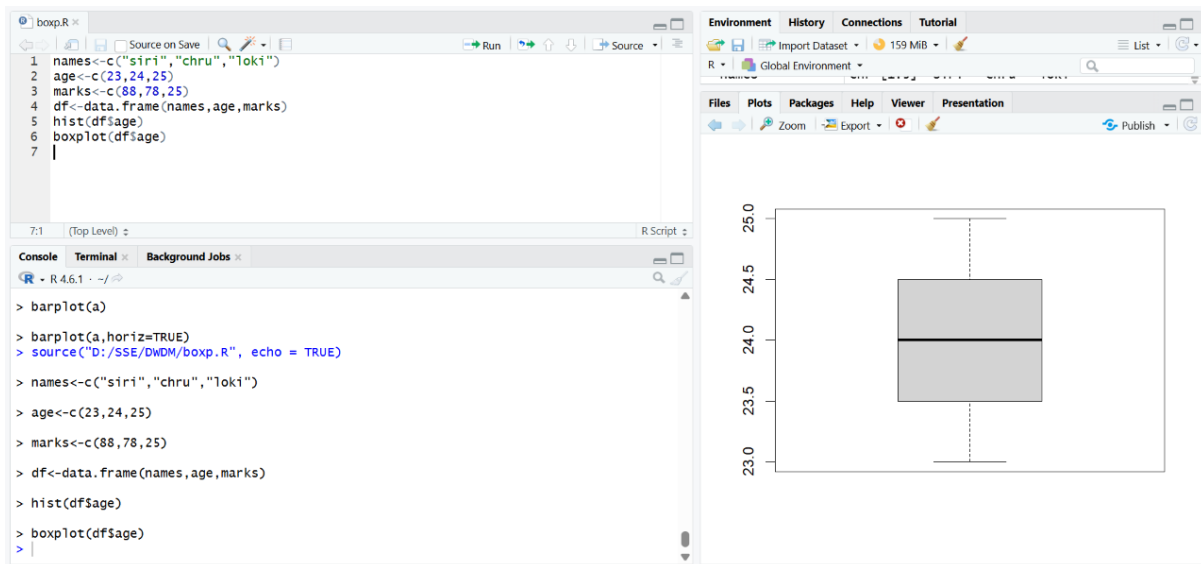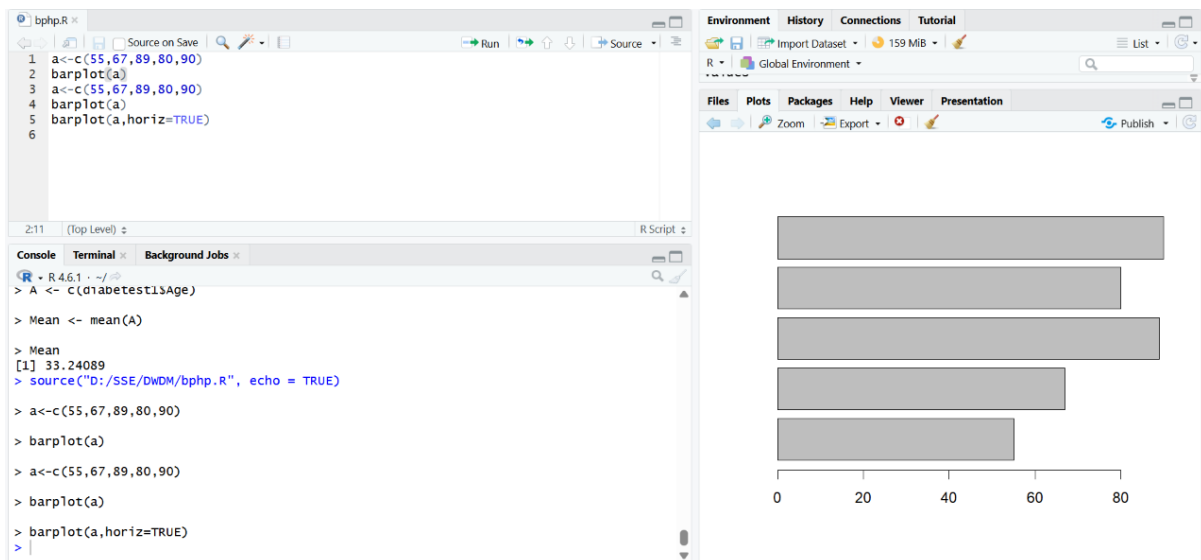

```
corr.R
1 diabetest1 <- read.csv("C:/Users/DELL/Downloads/diabetes.csv")
2 diabetest1<-table(diabetest1 $Age,diabetest1 $Insulin)
3 diabetest1
4 chisq.test(diabetest1)
5
```

1:63 (Top Level) R Script

Console Terminal Background Jobs


R - R 4.6.1 - ~/


```
> diabetest1
```

	0	14	15	16	18	22	23	25	29	32	36	37	38	40	41	42	43	44	45	46	48	49	50	51	52	53
21	28	0	0	0	1	0	1	1	0	0	0	0	0	1	0	0	0	0	1	0	0	0	1	1	0	0
22	29	0	0	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1	1	0	0	0	1	0	0	1
23	10	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	1	1	0	2	0	0	0	0	0
24	15	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	1	0	0	0	0	0	1	0	0	1
25	18	1	0	0	1	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	0

	54	55	56	57	58	59	60	61	63	64	65	66	67	68	70	71	72	73	74	75	76	77	78	79	81	82
21	0	0	1	0	0	0	0	1	0	1	0	1	0	0	0	1	0	0	0	0	2	0	1	0	0	1
22	1	0	0	0	1	0	1	0	1	1	0	1	0	0	0	0	0	0	0	1	1	0	0	0	0	1
23	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
24	0	1	1	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	1	0	0	0	1
25	0	0	1	1	0	1	0	0	1	0	0	1	0	0	0	0	0	1	0	1	0	0	0	0	0	0

	83	84	85	86	87	88	89	90	91	92	94	95	96	99	100	105	106	108	110	112	114	115	116
21	0	0	0	0	1	0	1	0	0	0	2	0	0	0	0	1	0	0	0	0	0	1	0

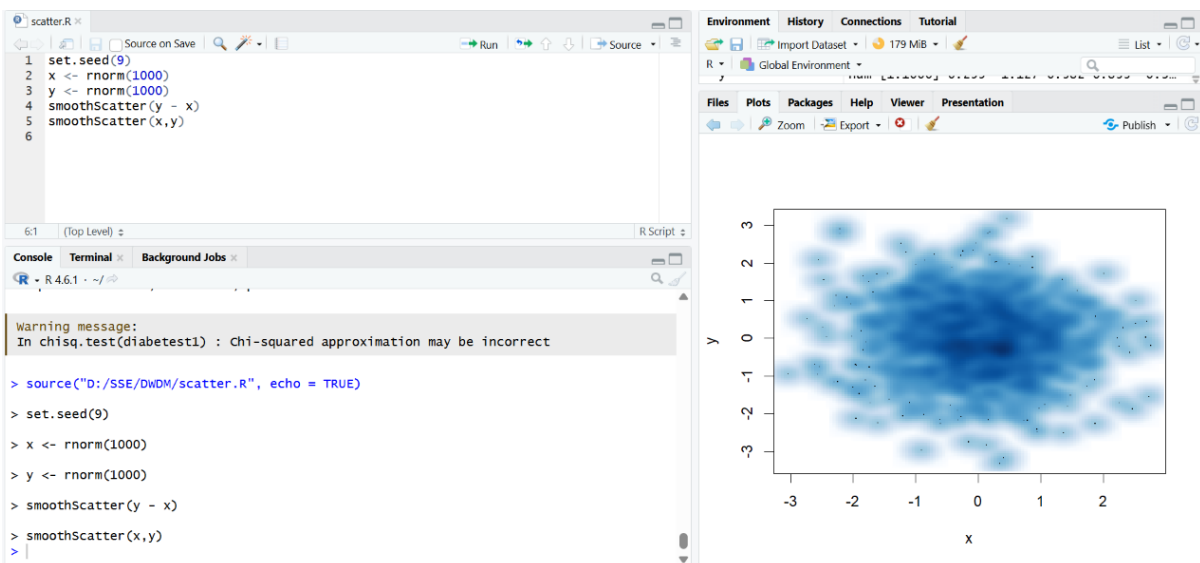

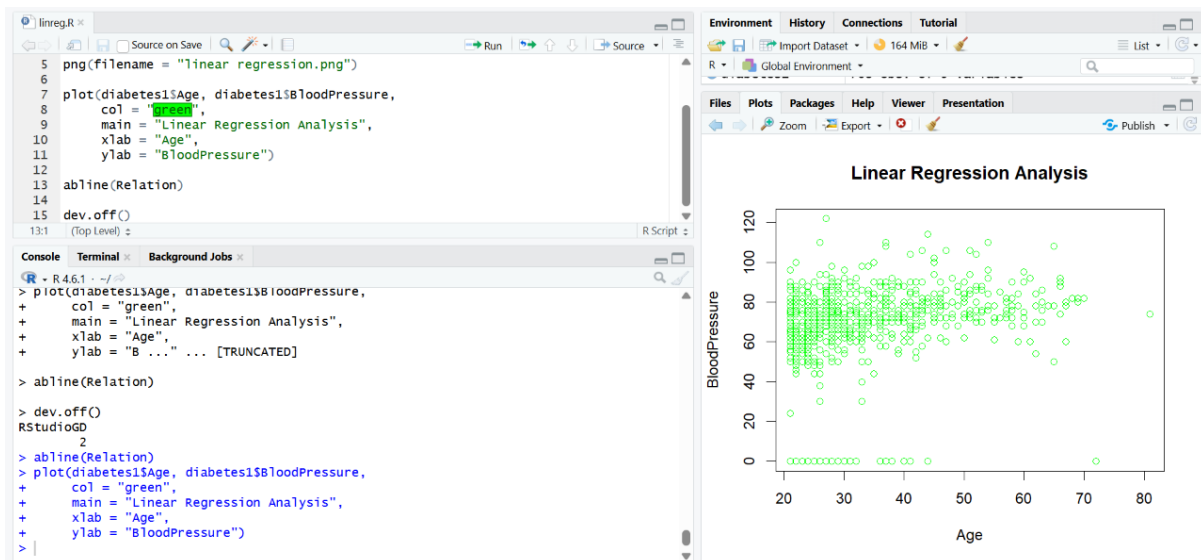

mulreg.R

```
1 Input <- diabetes1[, c("Age", "BloodPressure", "Glucose")]
2 Model <- lm(Age ~ BloodPressure + Glucose, data = Input)
3 print(Model)
4
```

4:1 (Top Level)

Console

```
+      ylab = "BloodPressure")
> source("D:/SSE/DWDM/mulreg.R", echo = TRUE)

> Input <- diabetes1[, c("Age", "BloodPressure", "Glucose")]

> Model <- lm(Age ~ BloodPressure + Glucose, data = Input)

> print(Model)

Call:
lm(formula = Age ~ BloodPressure + Glucose, data = Input)

Coefficients:
(Intercept)  BloodPressure    Glucose
  14.33937      0.12399      0.08547

> print(Model)
```