



RT by trial order, per subject/session

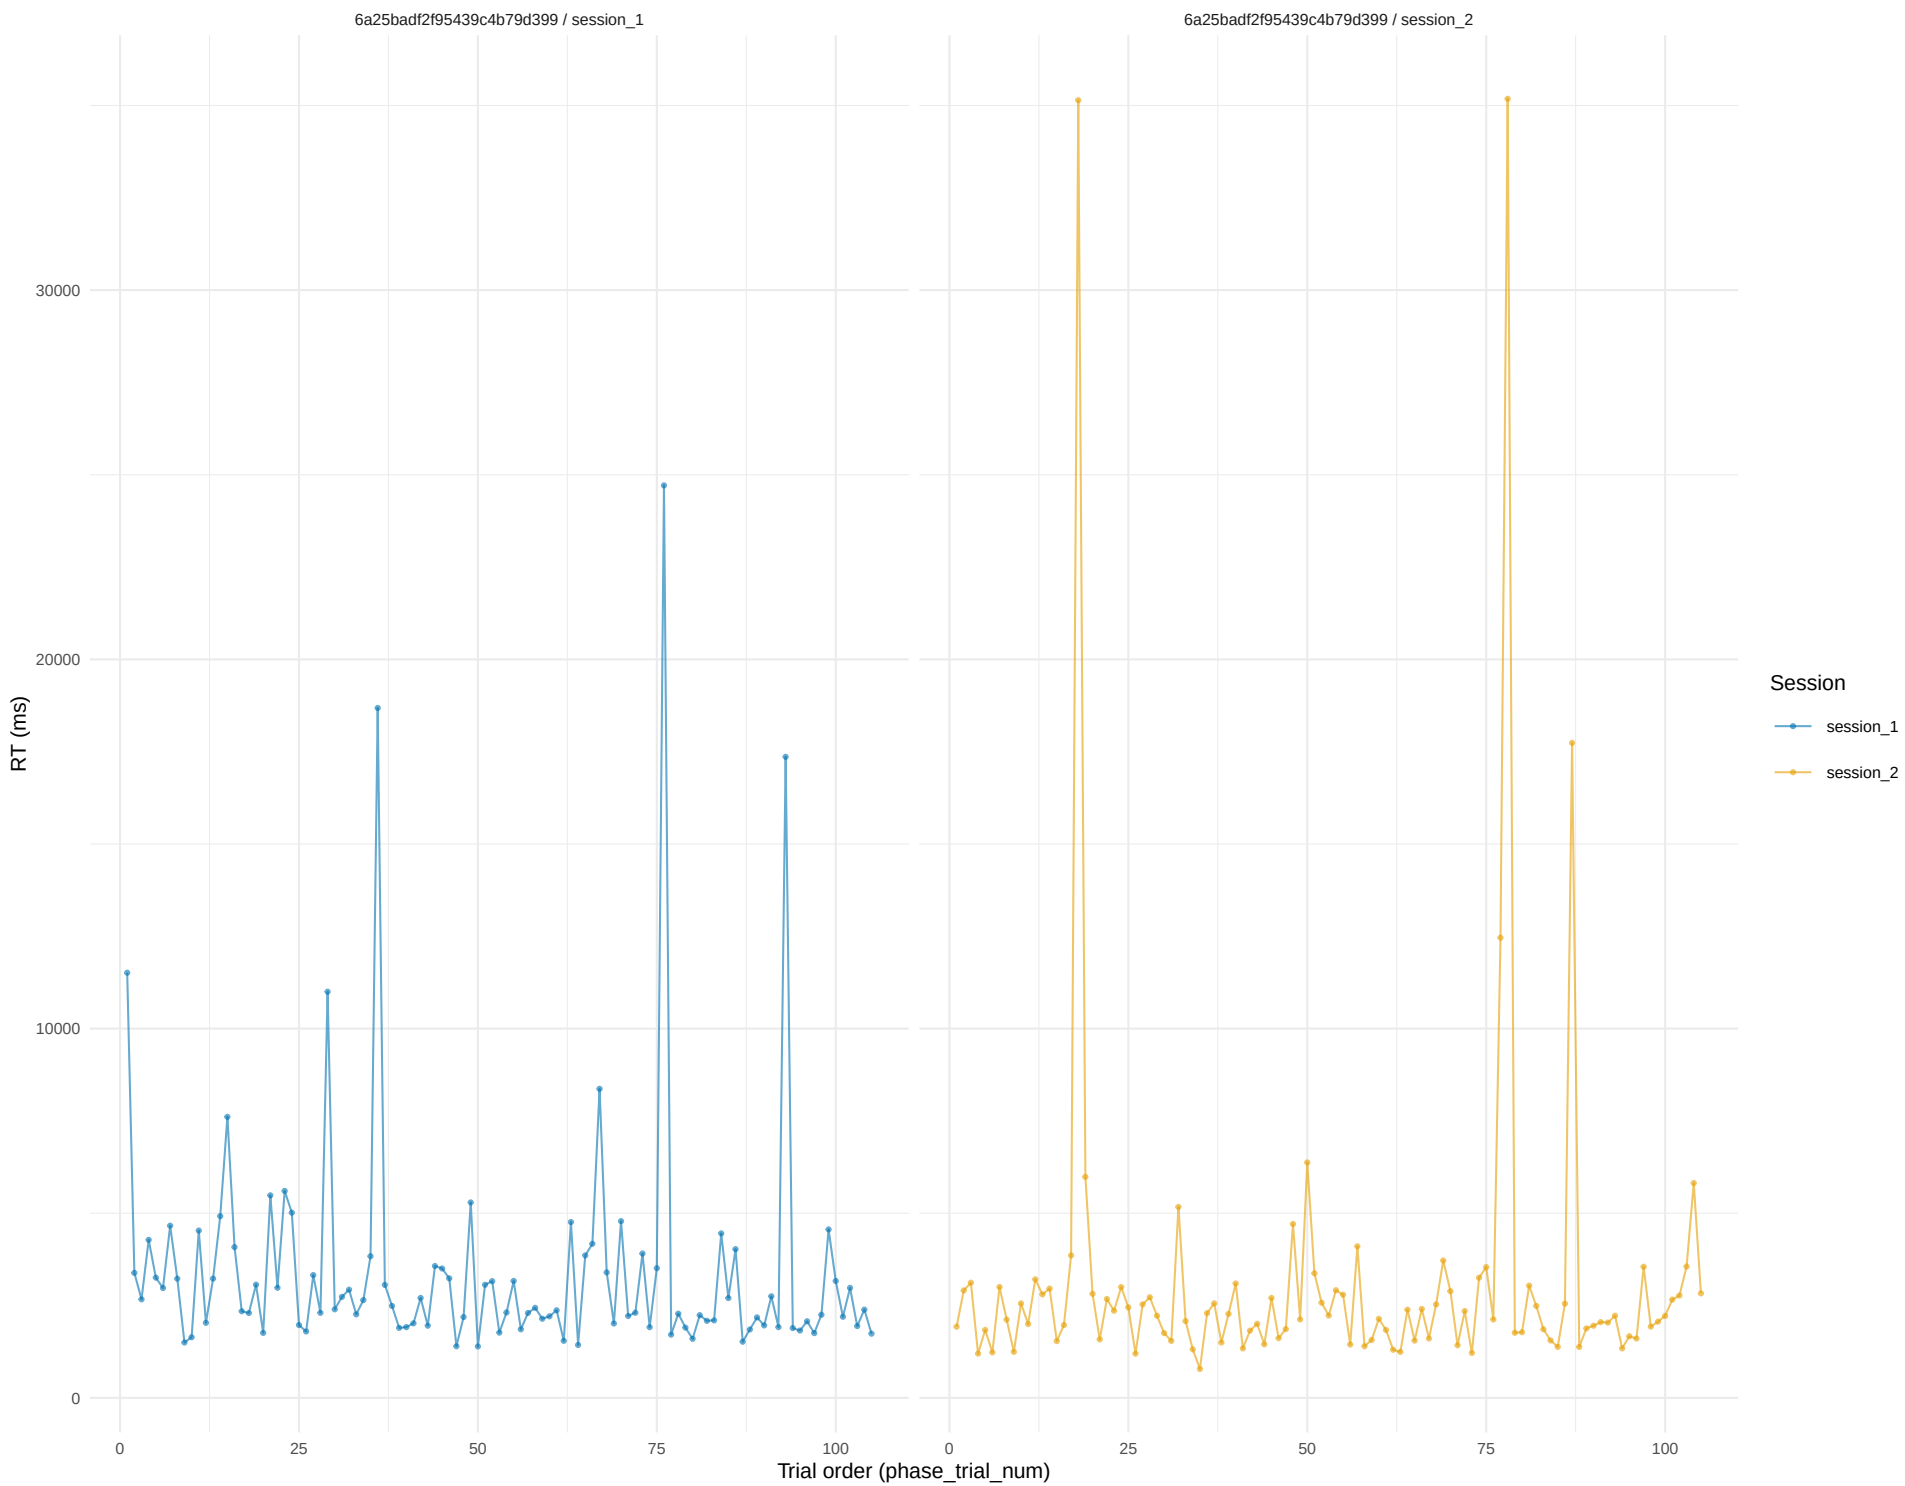

RT distribution, per subject/session (log10 x-axis)

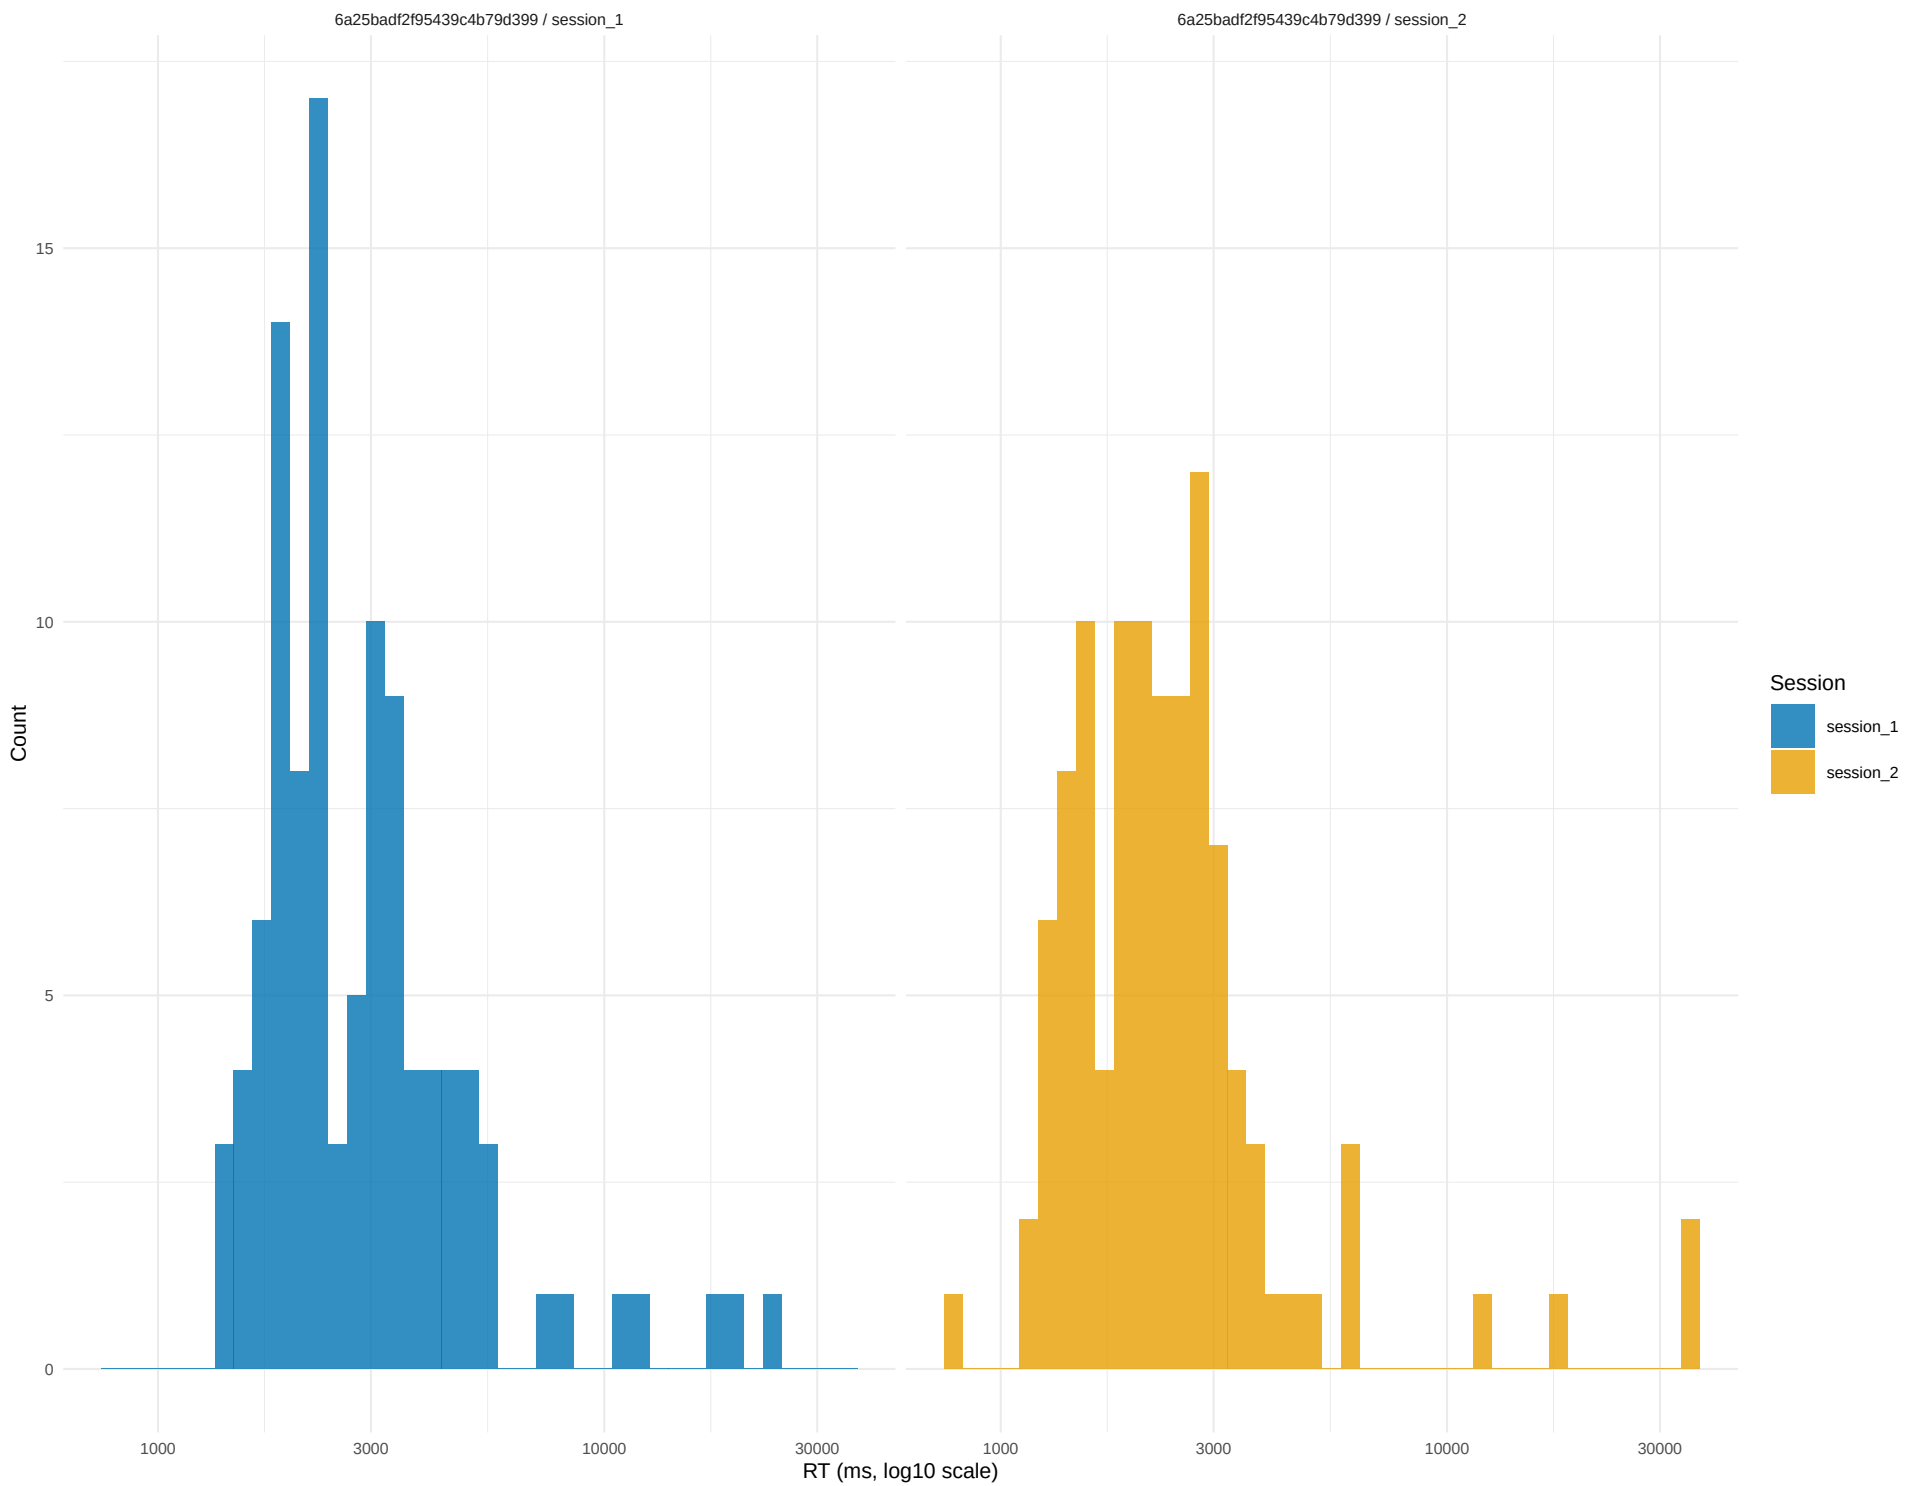

RT outlier frequency — cutoffs used: fast < 200 ms, slow > 10000 ms

prolific_pid	study_session	n_trials	n_fast	pct_fast	n_slow	pct_slow
6a25badf2f95439c4b79d399	session_1	105	0	0	5	4.8
6a25badf2f95439c4b79d399	session_2	105	0	0	4	3.8

Skipped trials — 'Neither bothered me' responses (a legitimate answer choice, NOT missing data)

prolific_pid	study_session	n_trials	n_skipped	pct_skipped
6a25badf2f95439c4b79d399	session_1	105	19	18.1
6a25badf2f95439c4b79d399	session_2	105	24	22.9

True missing data (rt or chosen_side NA) — distinct from skipped trials above

prolific_pid	study_session	n_trials	n_missing_rt	n_missing_choice
6a25badf2f95439c4b79d399	session_1	105	0	0
6a25badf2f95439c4b79d399	session_2	105	0	0

Trial-count sanity check (expected = 105 pairwise trials)

prolific_pid	study_session	n_trials_found	expected	mismatch
6a25badf2f95439c4b79d399	session_1	105	105	FALSE
6a25badf2f95439c4b79d399	session_2	105	105	FALSE

Window departures — n_departures = contiguous non-'ok' runs (see ASSUMED note in code)

prolific_pid	study_session	n_departures	total_window_left_ms	mean_window_left_ms
6a25badf2f95439c4b79d399	session_1	0	0	0
6a25badf2f95439c4b79d399	session_2	0	0	0