Web Technologies

Lab Task 2:

Name: Shahmina Zia
Roll no: Fa24-bcs-104


Lab 2 — Responsive Navbar and Grid Drill

Difficulty: Easy–Medium · **Covers:** Lectures 7–10 · **Folder:** `lab-2/`


A focused, smaller-scale rehearsal for Assignment 2: build **just** a responsive navbar (logo left, links center, cart icon right, collapsing into a hamburger menu below 768px) and a 4-column-desktop / 2-column-tablet / 1-column-phone product grid, using Flexbox or Grid plus Bootstrap or Tailwind. Content can be placeholder text/images — the point is the responsive mechanics, not the final design.

Deliverables in `lab-2/`: `index.html`, your CSS/framework files, and your completion PDF (with screenshots at phone/tablet/desktop widths).

SCREENSHOTS:

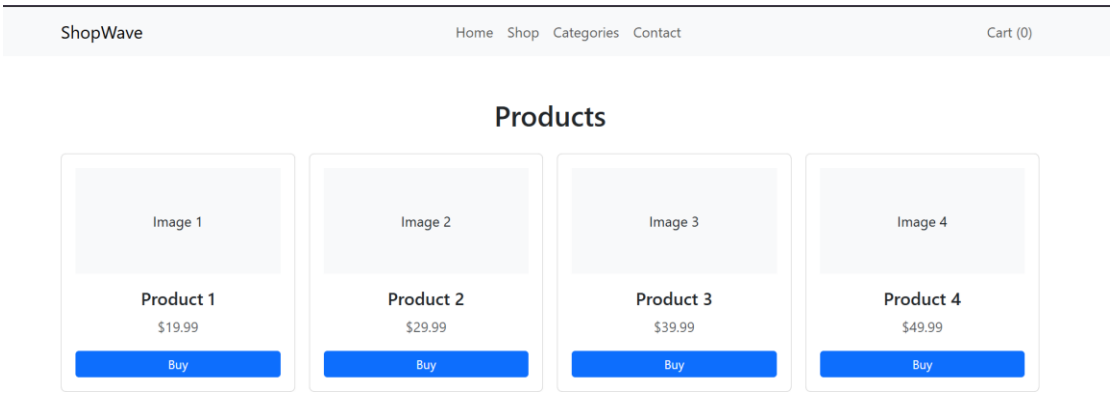


Products

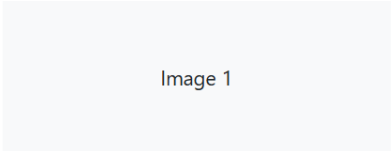

Product 1

$19.99

Buy

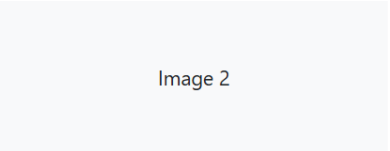

Product 2

$29.99


Buy



Product 3

$39.99


Buy

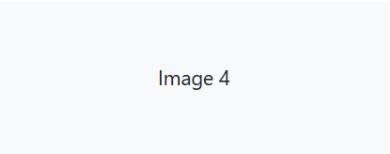

Product 4

$49.99

Buy

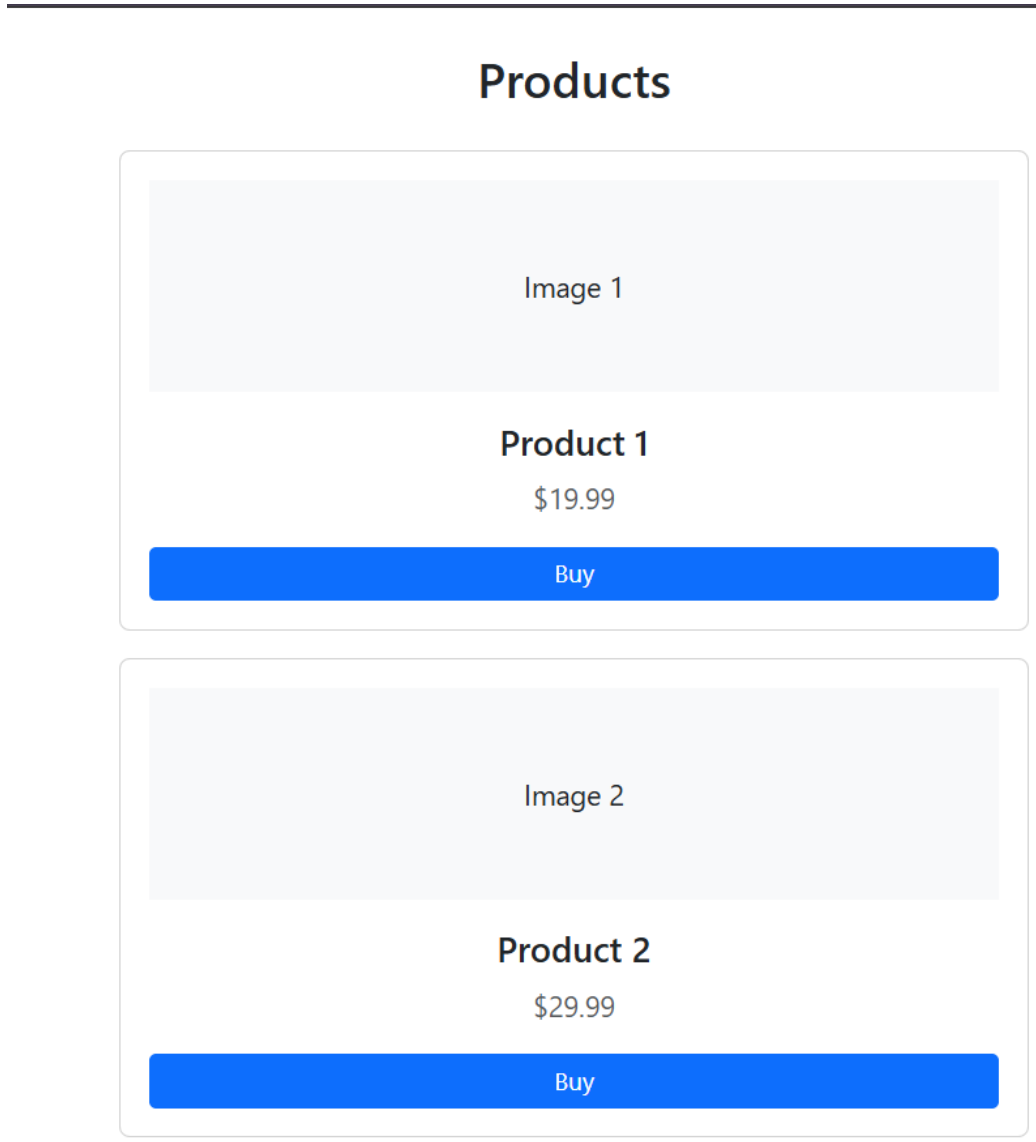

CODE:

INDEX.HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Lab 2 – Simplified Responsive Layout</title>

    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css" rel="stylesheet">
</head>
<body>


    <nav class="navbar navbar-expand-md navbar-light bg-light">
        <div class="container">

            <a class="navbar-brand" href="#">ShopWave</a>
```

```
            <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-
target="#navMenu">
                <span class="navbar-toggler-icon"></span>
            </button>

            <div class="collapse navbar-collapse" id="navMenu">

                <ul class="navbar-nav mx-auto">
                    <li class="nav-item"><a class="nav-link" href="#">Home</a></li>
                    <li class="nav-item"><a class="nav-link" href="#">Shop</a></li>
                    <li class="nav-item"><a class="nav-link" href="#">Categories</a></li>
                    <li class="nav-item"><a class="nav-link" href="#">Contact</a></li>
                </ul>
```

```
                <ul class="navbar-nav">
                    <li class="nav-item"><a class="nav-link" href="#">Cart (0)</a></li>
                </ul>
            </div>
        </div>
    </nav>
```

```
    <main class="container my-5">
        <h2 class="text-center mb-4">Products</h2>
```

```
        <div class="row g-3">

            <div class="col-12 col-md-6 col-lg-3">
                <div class="card p-3 text-center">
                    <div class="bg-light py-5 mb-3">Image 1</div>
                    <h5>Product 1</h5>
                    <p class="text-muted">$19.99</p>
                    <button class="btn btn-primary btn-sm">Buy</button>
                </div>
            </div>
```

```
            <div class="col-12 col-md-6 col-lg-3">
                <div class="card p-3 text-center">
                    <div class="bg-light py-5 mb-3">Image 2</div>
                    <h5>Product 2</h5>
                    <p class="text-muted">$29.99</p>
                    <button class="btn btn-primary btn-sm">Buy</button>
                </div>
            </div>
```

```
            <div class="col-12 col-md-6 col-lg-3">
                <div class="card p-3 text-center">
                    <div class="bg-light py-5 mb-3">Image 3</div>
                    <h5>Product 3</h5>
                    <p class="text-muted">$39.99</p>
                    <button class="btn btn-primary btn-sm">Buy</button>
                </div>
            </div>
```

```
            <div class="col-12 col-md-6 col-lg-3">
                <div class="card p-3 text-center">
                    <div class="bg-light py-5 mb-3">Image 4</div>
                    <h5>Product 4</h5>
                    <p class="text-muted">$49.99</p>
                    <button class="btn btn-primary btn-sm">Buy</button>
                </div>
            </div>
```

```
        </div>
    </main>
```

```
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js"></script>
```

```
</body>
</html>
```