


Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

 0–49

50–89

90–100

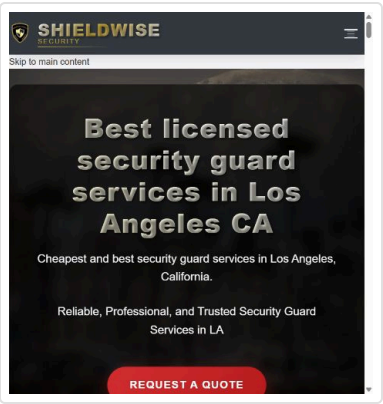

METRICS

Expand view

First Contentful Paint

0.6 s

Largest Contentful Paint

1.3 s

Total Blocking Time


0 ms

Cumulative Layout Shift

0.006

Speed Index

1.5 s

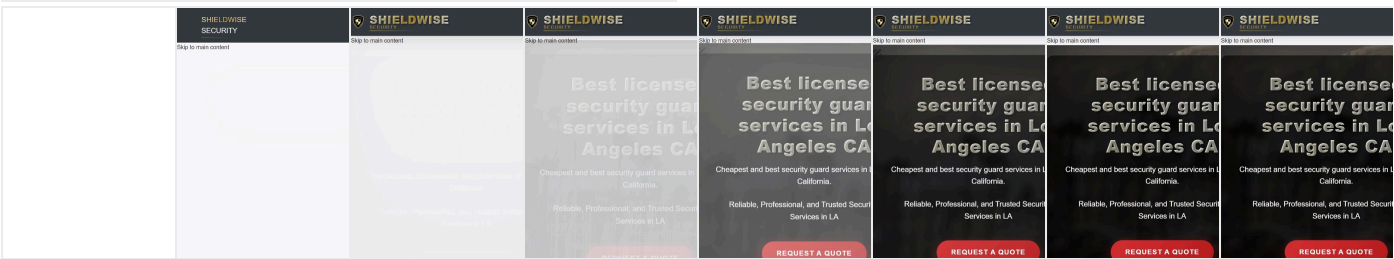

Later this year, insights will replace performance audits. [Learn more and provide feedback here.](#)

Go back to audits

Show audits relevant to: All FCP LCP TBT CLS

INSIGHTS

▲ Modern HTTP — Est savings of 80 ms

HTTP/2 and HTTP/3 offer many benefits over HTTP/1.1, such as multiplexing. [Learn more about using modern HTTP.](#) FCP
LCP

URL	Protocol
replit.dev 1st Party	
/los-angeles (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/style.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/style456.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/style-cities.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/favicon.ico (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/header-fix.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/JS/header-fix.js (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1

URL	Protocol
/JS/accessible-nav.js (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/JS/back-to-top.js (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/sanbardino12.webp (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/security-pattern-light.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/map-pattern.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/manifest.json (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
...icons/icon-144x144.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
...screenshots/desktop-home.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1

| ▲ Font display — Est savings of 160 ms ^ Consider setting [font-display](#) to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with [font metric overrides](#). FCP | URL | Est Savings | |--|-------------| | Cloudflare CDN Cdn | 310 ms | | ...webfonts/fa-solid-900.woff2 (cdnjs.cloudflare.com) | 160 ms | | ...webfonts/fa-brands-400.woff2 (cdnjs.cloudflare.com) | 160 ms | | |
| ▲ Render blocking requests — Est savings of 220 ms ^ Requests are blocking the page's initial render, which may delay LCP. [Deferring or inlining](#) can move these network requests out of the critical path. FCP LCP ☒ Show 3rd-party resources (2) | |

URL	Transfer Size	Duration
replit.dev 1st Party	27.8 KiB	580 ms
/css/style.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	10.4 KiB	170 ms
/css/style-cities.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	7.5 KiB	210 ms
/css/style456.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	10.0 KiB	210 ms
Cloudflare CDN Cdn	18.6 KiB	300 ms
...css/all.min.css (cdnjs.cloudflare.com)	18.6 KiB	300 ms
Bootstrap CDN Cdn	24.6 KiB	280 ms
...css/bootstrap.min.css (stackpath.bootstrapcdn.com)	24.6 KiB	280 ms

▲ LCP request discovery
^

Optimize LCP by making the LCP image [discoverable](#) from the HTML immediately, and [avoiding lazy-loading](#) LCP

- fetchpriority=high should be applied
- Request is discoverable in initial document
- lazy load not applied

header.hero-sec

▲ Network dependency tree
^

[Avoid chaining critical requests](#) by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP

Maximum critical path latency: **867 ms**

Initial Navigation

/los-angeles (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **362 ms**, 12.33 KiB

...icons/icon-144x144.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **867 ms**, 1.08 KiB

/manifest.json (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **778 ms**, 2.88 KiB

...css/all.min.css (cdnjs.cloudflare.com) - **301 ms**, 19.07 KiB

...webfonts/fa-solid-900.woff2 (cdnjs.cloudflare.com) - **763 ms**, 153.29 KiB

...webfonts/fa-brands-400.woff2 (cdnjs.cloudflare.com) - **748 ms**, 115.39 KiB

/JS/back-to-top.js (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **542 ms**, 3.15 KiB

...umd/popper.min.js (cdn.jsdelivr.net) - **374 ms**, 7.78 KiB

...js/bootstrap.min.js (stackpath.bootstrapcdn.com) - **366 ms**, 15.18 KiB

/css/header-fix.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **361 ms**, 4.27 KiB

/css/style.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **345 ms**, 10.35 KiB

/css/style-cities.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **310 ms**, 7.47 KiB

/css/style456.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev) - **308 ms**, 9.97 KiB

...css/all.min.css (cdnjs.cloudflare.com) - **307 ms**, 18.65 KiB

...css/bootstrap.min.css (stackpath.bootstrapcdn.com) - **300 ms**, 24.57 KiB

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

no origins were preconnected

Preconnect candidates

Add [preconnect](#) hints to your most important origins, but try to use no more than 4.

Origin

Est LCP savings

https://cdnjs.cloudflare.com

80 ms

Improve image delivery — Est savings of 8 KiB			^
Reducing the download time of images can improve the perceived load time of the page and LCP. Learn more about optimizing image size FCP LCP			
URL	Resource Size	Est Savings	
replit.dev 1st Party	14.7 KiB	7.7 KiB	
/img/favicon.ico (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	14.7 KiB	7.7 KiB	
Using a modern image format (WebP, AVIF) or increasing the image compression could improve this image's download size.		7.7 KiB	
○ Layout shift culprits			^
Layout shifts occur when elements move absent any user interaction. Investigate the causes of layout shifts , such as elements being added, removed, or their fonts changing as the page loads. CLS			
Element	Layout shift score		
Total	0.006		
div.container	0.003		
div.company-name	0.002		
div.company-name	0.001		
div.company-main	0.000		
○ Optimize DOM size			^
A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. Learn how to avoid an excessive DOM size .			

Statistic	Element	Value
Total elements		457
Most children	div.cities-container-sec	38
DOM depth	span	12

LCP breakdown

Each [subpart has specific improvement strategies](#). Ideally, most of the LCP time should be spent on loading the resources, not within delays.

LCP

Subpart	Duration
Time to first byte	110 ms
Resource load delay	290 ms
Resource load duration	460 ms
Element render delay	120 ms

header.hero-sec

3rd parties

3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content.

3rd party	Transfer size	Main thread time
pphgdbglmicfdkhondlafkiomnelnk	0 KiB	143 ms
chrome-extension://pphgdbglmicfdkhondlafkiomnelnk/libs/processor.js	0 KiB	70 ms
chrome-extension://pphgdbglmicfdkhondlafkiomnelnk/ad-blocker/content.js	0 KiB	38 ms

3rd party	Transfer size	Main thread time
chrome-extension://pphgdbglldmicfdkhondlafkiomnelnk/content.js	0 KiB	27 ms
chrome-extension://pphgdbglldmicfdkhondlafkiomnelnk/libs/requests.js	0 KiB	4 ms
chrome-extension://pphgdbglldmicfdkhondlafkiomnelnk/content/location/location.js	0 KiB	2 ms
chrome-extension://pphgdbglldmicfdkhondlafkiomnelnk/libs/extend-native-history-api.js	0 KiB	2 ms
chrome-extension://pphgdbglldmicfdkhondlafkiomnelnk/executors/traffic.js	0 KiB	0 ms
jQuery CDN Cdn	24 KiB	35 ms
/jquery-3.5.1.slim.min.js (code.jquery.com)	24 KiB	35 ms
Bootstrap CDN Cdn	63 KiB	13 ms
...js/bootstrap.min.js (stackpath.bootstrapcdn.com)	15 KiB	7 ms
...js/bootstrap.bundle.min.js (stackpath.bootstrapcdn.com)	24 KiB	6 ms
...css/bootstrap.min.css (stackpath.bootstrapcdn.com)	25 KiB	0 ms
JSDelivr CDN Cdn	8 KiB	2 ms
...umd/popper.min.js (cdn.jsdelivr.net)	8 KiB	2 ms
Cloudflare CDN Cdn	306 KiB	0 ms
...webfonts/fa-solid-900.woff2 (cdnjs.cloudflare.com)	153 KiB	0 ms
...webfonts/fa-brands-400.woff2 (cdnjs.cloudflare.com)	115 KiB	0 ms
...css/all.min.css (cdnjs.cloudflare.com)	19 KiB	0 ms
...css/all.min.css (cdnjs.cloudflare.com)	19 KiB	0 ms

These insights are also available in the Chrome DevTools Performance Panel - [record a trace](#) to view more detailed information.

DIAGNOSTICS

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#) LCP

FCP

URL	Protocol
replit.dev 1st Party	
/los-angeles (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/style.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/style456.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/style-cities.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/favicon.ico (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/css/header-fix.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/JS/header-fix.js (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/JS/accessible-nav.js (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/JS/back-to-top.js (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/sanbardino12.webp (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/security-pattern-light.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
/img/map-pattern.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1

URL	Protocol
/manifest.json (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
...icons/icon-144x144.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1
...screenshots/desktop-home.png (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	http/1.1

Minify CSS — Est savings of 5 KiB

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) FCP LCP

URL	Transfer Size	Est Savings
replit.dev 1st Party	17.8 KiB	5.3 KiB
/css/style.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	10.4 KiB	3.2 KiB
/css/style-cities.css (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	7.5 KiB	2.1 KiB

Avoid serving legacy JavaScript to modern browsers — Est savings of 0 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support legacy browsers. [Learn why most sites can deploy ES6+ code without transpiling.](#) FCP LCP

URL	Est Savings
Bootstrap CDN Cdn ..js/bootstrap.bundle.min.js (stackpath.bootstrapcdn.com) <div>bootstrap.bundle.min.js:6</div> <div>@babel/plugin-transform-classes</div>	0.2 KiB 0.2 KiB
1ClickVPN Proxy for Chrome Chrome Extension chrome-extension://pphgdbglldmicfdkhondlafkiomnelnk/ad-blocker/content.js <div>content.js:1</div> <div>@babel/plugin-transform-regenerator</div>	0.0 KiB 0.0 KiB
JSDelivr CDN Cdn ...umd/popper.min.js (cdn.jsdelivr.net) <div>popper.min.js:4</div> <div>@babel/plugin-transform-classes</div>	0.0 KiB 0.0 KiB

Reduce unused CSS — Est savings of 30 KiB
 ^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity.
 [Learn how to reduce unused CSS.](#)
FCP
LCP

URL	Transfer Size	Est Savings
Cloudflare CDN Cdn ...css/all.min.css (cdnjs.cloudflare.com)	30.1 KiB 18.5 KiB	29.6 KiB 18.1 KiB

URL	Transfer Size	Est Savings
...css/all.min.css (cdnjs.cloudflare.com)	11.7 KiB	11.5 KiB

Reduce unused JavaScript — Est savings of 100 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) FCP LCP

URL	Transfer Size	Est Savings
1ClickVPN Proxy for Chrome Chrome Extension	162.1 KiB	99.9 KiB
chrome-extension://pphgdbgldlmicfdkhondlafkiomnelnk/ad-blocker/content.js	79.6 KiB	66.4 KiB
chrome-extension://pphgdbgldlmicfdkhondlafkiomnelnk/libs/processor.js	82.5 KiB	33.5 KiB

○ Avoid long main-thread tasks — 2 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT

URL	Start Time	Duration
replit.dev 1st Party		145 ms
/los-angeles (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	417 ms	76 ms

URL	Start Time	Duration
/los-angeles (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	315 ms	69 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (17)

Hide

Use efficient cache lifetimes	^
A long cache lifetime can speed up repeat visits to your page. Learn more. FCP LCP	
Document request latency	^
Your first network request is the most important. Reduce its latency by avoiding redirects, ensuring a fast server response, and enabling text compression. FCP LCP	
Avoids redirects	
Server responds quickly (observed 106 ms)	
Applies text compression	
Duplicated JavaScript	^
Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP	
Forced reflow	^
A forced reflow occurs when JavaScript queries geometric properties (such as <code>offsetWidth</code>) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about forced reflows and possible mitigations.	

<div> <div>○</div> <div>INP breakdown</div> <div>^</div> </div>
<p>Start investigating with the longest subpart. Delays can be minimized. To reduce processing duration, optimize the main-thread costs, often JS.</p>
<div> <div>Legacy JavaScript</div> <div>^</div> </div>
<p>Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile Baseline features, unless you know you must support older browsers. Learn why most sites can deploy ES6+ code without transpiling FCP LCP</p>
<div> <div>Optimize viewport for mobile</div> <div>^</div> </div>
<p>Tap interactions may be delayed by up to 300 ms if the viewport is not optimized for mobile.</p> <hr/> <p>meta</p>
<div> <div>Defer offscreen images</div> <div>^</div> </div>
<p>Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn how to defer offscreen images. FCP LCP</p>
<div> <div>Minify JavaScript</div> <div>^</div> </div>
<p>Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. FCP LCP</p>
<div> <div> <div>Avoids enormous network payloads</div> <div>— Total size was 714 KiB</div> </div> <div>^</div> </div>
<p>Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes.</p> <div> <input checked="" type="checkbox"/> Show 3rd-party resources (8) </div>

URL	Transfer Size
Cloudflare CDN Cdn	306.4 KiB
...webfonts/fa-solid-900.woff2 (cdnjs.cloudflare.com)	153.3 KiB
...webfonts/fa-brands-400.woff2 (cdnjs.cloudflare.com)	115.4 KiB
...css/all.min.css (cdnjs.cloudflare.com)	19.1 KiB
...css/all.min.css (cdnjs.cloudflare.com)	18.6 KiB
replit.dev 1st Party	256.5 KiB
/img/sanbardino12.webp (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	244.1 KiB
/los-angeles (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	12.3 KiB
Bootstrap CDN Cdn	63.4 KiB
...css/bootstrap.min.css (stackpath.bootstrapcdn.com)	24.6 KiB
...js/bootstrap.bundle.min.js (stackpath.bootstrapcdn.com)	23.7 KiB
...js/bootstrap.min.js (stackpath.bootstrapcdn.com)	15.2 KiB
jQuery CDN Cdn	24.4 KiB
/jquery-3.5.1.slim.min.js (code.jquery.com)	24.4 KiB
<div> User Timing marks and measures ^ </div>	

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

JavaScript execution time — 0.2 s



Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

URL	Total CPU Time	Script Evaluation	Script Parse
replit.dev 1st Party	794 ms	95 ms	42 ms
/los-angeles (36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev)	794 ms	95 ms	42 ms
Unattributable	129 ms	28 ms	0 ms
Unattributable	129 ms	28 ms	0 ms

Minimizes main-thread work — 1.0 s



Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT

Category	Time Spent
Other	328 ms
Style & Layout	269 ms
Script Evaluation	193 ms

Category	Time Spent
Rendering	155 ms
Script Parsing & Compilation	62 ms
Parse HTML & CSS	33 ms
Garbage Collection	5 ms

<input type="radio"/> Lazy load third-party resources with facades	^
Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. Learn how to defer third-parties with a facade. TBT	
Uses passive listeners to improve scrolling performance	^
Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. Learn more about adopting passive event listeners.	
Avoids <code>document.write()</code>	^
For users on slow connections, external scripts dynamically injected via <code>document.write()</code> can delay page load by tens of seconds. Learn how to avoid document.write() .	
Page didn't prevent back/forward cache restoration	^
Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. Learn more about the bfcache	



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.



Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Failing Elements

div.position

div.testimonial

div.position

div.testimonial

div.position

div.testimonial

button.btn.btn-link.btn-block.text-left.text-decoration-none

div#headingOne.card-header

div.card.mb-3

button.btn.btn-link.btn-block.text-left.collapsed.text-decoration-none

Failing Elements
div#headingTwo.card-header
div.card.mb-3
button.btn.btn-link.btn-block.text-left.collapsed.text-decoration-none
div#headingThree.card-header
div.card.mb-3
button.btn.btn-link.btn-block.text-left.collapsed.text-decoration-none
div#headingFour.card-header
div.card.mb-3

These are opportunities to improve the legibility of your content.

NAVIGATION

<div>▲</div> <div>Heading elements are not in a sequentially-descending order</div> <div>^</div>			
<p>Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.</p> <table> <tr> <th>Failing Elements</th></tr> <tr> <td>h4</td></tr> <tr> <td>h5.footer-title</td></tr> </table>	Failing Elements	h4	h5.footer-title
Failing Elements			
h4			
h5.footer-title			

These are opportunities to improve keyboard navigation in your application.

☐ Interactive controls are keyboard focusable



Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#)

☐ Interactive elements indicate their purpose and state



Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

☐ The page has a logical tab order



Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#)

☐ Visual order on the page follows DOM order



DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#)

☐ User focus is not accidentally trapped in a region



A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#)

☐ The user's focus is directed to new content added to the page



If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#)

☐ HTML5 landmark elements are used to improve navigation



Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology.

Learn more about landmark elements.	
<input type="radio"/> Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.	
<input type="radio"/> Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.	
<input type="radio"/> Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls.	

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (22)

Hide

[aria-*] attributes match their roles	^
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles.	
[aria-hidden="true"] is not present on the document <code><body></code>	^
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <code><body></code> . Learn how aria-hidden affects the document body.	
[role] s have all required [aria-*] attributes	^

Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.	
<code>[aria-*)</code> attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.	
<code>[aria-*)</code> attributes are valid and not misspelled	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	
Buttons have an accessible name	^
When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible.	
Image elements have <code>[alt]</code> attributes	^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.	
<code>[user-scalable="no"]</code> is not used in the <code><meta name="viewport"></code> element and the <code>[maximum-scale]</code> attribute is not less than 5.	^
Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.	
ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.	

Elements use only permitted ARIA attributes	^
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.	
[role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.	
Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.	
<html> element has a [lang] attribute	^
If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.	
<html> element has a valid value for its [lang] attribute	^
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.	
Links are distinguishable without relying on color.	^
Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable.	
Links have a discernible name	^

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.	
Lists contain only <code></code> elements and script supporting elements (<code><script></code> and <code><template></code>).	^
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.	
List items (<code></code>) are contained within <code></code> , <code></code> or <code><menu></code> parent elements	^
Screen readers require list items (<code></code>) to be contained within a parent <code></code> , <code></code> or <code><menu></code> to be announced properly. Learn more about proper list structure.	
Touch targets have sufficient size and spacing.	^
Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.	
Uses ARIA roles only on compatible elements	^
Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles.	
Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.	
Image elements do not have <code>[alt]</code> attributes that are redundant text.	^
Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the alt attribute.	

<input type="radio"/> [accesskey] values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.	
<input type="radio"/> button , link , and menuitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible.	
<input type="radio"/> Elements with role="dialog" or role="alertdialog" have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.	
<input type="radio"/> [aria-hidden="true"] elements do not contain focusable descendents	^
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	
<input type="radio"/> ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels.	
<input type="radio"/> ARIA meter elements have accessible names	^
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements.	

○ ARIA `progressbar` elements have accessible names



When a `progressbar` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#)

○ Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children.



Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#)

○ `[role]`s are contained by their required parent element



Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#)

○ Elements with the `role=text` attribute do not have focusable descendents.



Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the `role=text` attribute.](#)

○ ARIA toggle fields have accessible names



When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#)

○ ARIA `tooltip` elements have accessible names



When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#)

○ ARIA `treeitem` elements have accessible names



<p>When a <code>treeitem</code> element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling <code>treeitem</code> elements.</p>	
<p><input type="radio"/> The page contains a heading, skip link, or landmark region ^</p>	
<p>Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks.</p>	
<p><input type="radio"/> <code><d1></code>'s contain only properly-ordered <code><dt></code> and <code><dd></code> groups, <code><script></code>, <code><template></code> or <code><div></code> elements. ^</p>	
<p>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly.</p>	
<p><input type="radio"/> Definition list items are wrapped in <code><d1></code> elements ^</p>	
<p>Definition list items (<code><dt></code> and <code><dd></code>) must be wrapped in a parent <code><d1></code> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly.</p>	
<p><input type="radio"/> ARIA IDs are unique ^</p>	
<p>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs.</p>	
<p><input type="radio"/> No form fields have multiple labels ^</p>	
<p>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels.</p>	
<p><input type="radio"/> <code><frame></code> or <code><iframe></code> elements have a title ^</p>	
<p>Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles.</p>	

☐ `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute. ^

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

☐ Input buttons have discernible text. ^

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#)

☐ `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#)

☐ Form elements have associated labels ^

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#)

☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#)

☐ Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the select element.	
<input type="radio"/> Skip links are focusable.	^
Including a skip link can help users skip to the main content to save time. Learn more about skip links.	
<input type="radio"/> No element has a <code>[tabindex]</code> value greater than 0	^
A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the tabindex attribute.	
<input type="radio"/> Tables have different content in the summary attribute and <code><caption></code> .	^
The summary attribute should describe the table structure, while <code><caption></code> should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption.	
<input type="radio"/> Cells in a <code><table></code> element that use the <code>[headers]</code> attribute refer to table cells within the same table.	^
Screen readers have features to make navigating tables easier. Ensuring <code><td></code> cells using the <code>[headers]</code> attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the headers attribute.	
<input type="radio"/> <code><th></code> elements and elements with <code>[role="columnheader"/"rowheader"]</code> have data cells they describe.	^
Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers.	
<input type="radio"/> <code>[lang]</code> attributes have a valid value	^
Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the lang attribute.	

○ <video> elements contain a <track> element with [kind="captions"] ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#)



Best Practices

GENERAL

▲ Browser errors were logged to the console ^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

Source	Description
replit.dev 1st Party	
los-angeles:1	Error while trying to use the following icon from the Manifest: https://36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev/img/icons/icon-144x144.png (Download error or resource isn't a valid image)
los-angeles:1	Error while trying to use the following icon from the Manifest: https://36a15763-daa0-4034-9c05-90a308805a6f-00-3in4w5ae5i40v.worf.replit.dev/img/screenshots/desktop-home.png (Download error or resource isn't a valid image)

Source	Description
security-pattern-light.png:1	Failed to load resource: the server responded with a status of 404 (Not Found)
map-pattern.png:1	Failed to load resource: the server responded with a status of 404 (Not Found)
icon-144x144.png:1	Failed to load resource: the server responded with a status of 404 (Not Found)
desktop-home.png:1	Failed to load resource: the server responded with a status of 404 (Not Found)

☐ Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Name	Version
Bootstrap	4.5.2
jQuery	3.5.1

TRUST AND SAFETY

<input type="radio"/> Ensure CSP is effective against XSS attacks
<p>A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. Learn how to use a CSP to prevent XSS</p>

Description	Directive	Severity
Host allowlists can frequently be bypassed. Consider using CSP nonces or hashes instead, along with "strict-dynamic" if necessary.	script-src	High
"unsafe-inline" allows the execution of unsafe in-page scripts and event handlers. Consider using CSP nonces or hashes to allow scripts individually.	script-src	High
"unsafe-inline" allows the execution of unsafe in-page scripts and event handlers. Consider using CSP nonces or hashes to allow scripts individually.	script-src-attr	High
'unsafe-hashes', while safer than 'unsafe-inline', allows the execution of unsafe in-page scripts and event handlers as long as their hashes appear in the CSP. Please refactor them to no longer use inline scripts if possible.	script-src-attr	High

Mitigate DOM-based XSS with Trusted Types

The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types.](#)

Description	Severity
No 'Content-Security-Policy' header with Trusted Types directive found	High

PASSED AUDITS (13)

Hide

Uses HTTPS
<p>All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS.</p>

Avoids deprecated APIs	^
Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs.	
Avoids third-party cookies	^
Third-party cookies may be blocked in some contexts. Learn more about preparing for third-party cookie restrictions.	
Allows users to paste into input fields	^
Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields.	
Avoids requesting the geolocation permission on page load	^
Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission.	
Avoids requesting the notification permission on page load	^
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications.	
Displays images with correct aspect ratio	^
Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio.	
Serves images with appropriate resolution	^
Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images.	

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#).

Page has the HTML doctype



Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration](#).

Properly defines charset



A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding](#).

No issues in the **Issues** panel in Chrome Devtools



Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps



Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps](#).

URL	Map URL
Bootstrap CDN Cdn	...
...js/bootstrap.min.js (stackpath.bootstrapcdn.com)	js/bootstrap.min.js.map (stackpath.bootstrapcdn.com)

URL	Map URL
<pre>Error: Protocol error (Network.loadNetworkResource): Protocol error (Network.loadNetworkResource): CSP violation</pre>	
<pre>...js/bootstrap.bundle.min.js (stackpath.bootstrapcdn.com)</pre>	<pre>... js/bootstrap.bundle.min.js.map (stackpath.bootstrapcdn.com)</pre>
<pre>Error: Protocol error (Network.loadNetworkResource): Protocol error (Network.loadNetworkResource): CSP violation</pre>	
JSDelivr CDN Cdn	
<pre>...umd/popper.min.js (cdn.jsdelivr.net)</pre>	<pre>...umd/popper.min.js.map (cdn.jsdelivr.net)</pre>
<pre>Error: Protocol error (Network.loadNetworkResource): Protocol error (Network.loadNetworkResource): CSP violation</pre>	

NOT APPLICABLE (5)

Hide

<input type="radio"/> Redirects HTTP traffic to HTTPS	^
Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more.	
<input type="radio"/> Use a strong HSTS policy	^
Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. Learn more about using a strong HSTS policy.	
<input type="radio"/> Ensure proper origin isolation with COOP	^
The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. Learn more about deploying the COOP header.	

○ Mitigate clickjacking with XFO or CSP




The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#)

○ Document uses legible font sizes



Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes.](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

CRAWLING AND INDEXING

▲ Page is blocked from indexing



Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Blocking Directive Source

X-Robots-Tag: none, noindex, noarchive, nofollow, nositelinkssearchbox, noimageindex

Blocking Directive Source
X-Robots-Tag: none, noindex, noarchive, nofollow, nositelinkssearchbox, noimageindex

To appear in search results, crawlers need access to your app.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

<div>○ Structured data is valid</div>	^
Run the Structured Data Testing Tool and the Structured Data Linter to validate structured data. Learn more about Structured Data .	

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (9)

Hide

Document has a <code><title></code> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles .	
Document has a meta description	^
Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description .	
Page has successful HTTP status code	^
Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes .	
Links have descriptive text	^

Descriptive link text helps search engines understand your content. Learn how to make links more accessible.		
Links are crawlable		^
Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable		
robots.txt is valid		^
If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt.		
Image elements have <code>[alt]</code> attributes		^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.		
Document has a valid <code>hreflang</code>		^
hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang.		
Document has a valid <code>rel=canonical</code>		^
Canonical links suggest which URL to show in search results. Learn more about canonical links.		

Captured at Nov 2, 2025, 2:47
PM PST
Initial page load

Emulated Desktop with
Lighthouse 12.8.2
Custom throttling

Single page session
Using Chromium 141.0.0.0 with
devtools

