
ELISA CHALLENGE · SINCE AI HACKATHON 2026 · TURKU

buildR

User guide

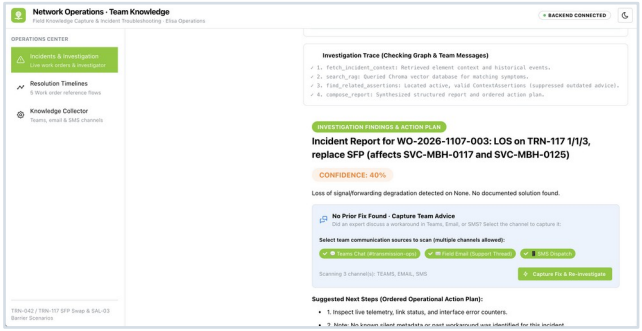

Investigate | Capture | Act

Use buildR in five minutes

Start the system, investigate an incident, capture team knowledge

Team buildR

Who this guide is for



NOC operators and field engineers

You use the web app: investigate incidents, capture advice, follow the plan.

Slides 4–9



Experts

You do nothing new. Keep writing in Teams and email. A few tips help the system.

Slide 10



Administrators

You start, reset and check the system with a few commands.

Slides 3, 11, 12

You need: a modern web browser. Administrators also need Docker Desktop and Git.

Start the system (administrator)

1 **Get code and settings**

```
git clone https://github.com/dipankar/sinceaihackathon2026.git
```

```
cp .env.example .env    # optional: add LLM_API_KEY
```

2 **Start all 10 services**

```
docker compose up -d --build
```

```
docker compose ps        # wait until all are (healthy)
```

3 **Load the network data**


```
curl -X POST http://localhost:8000/seed-graph
```

4 **Open the app**

```
http://localhost:3000
```

The first start takes a few minutes. Without an LLM key, buildR uses its offline extractor.

The app at a glance

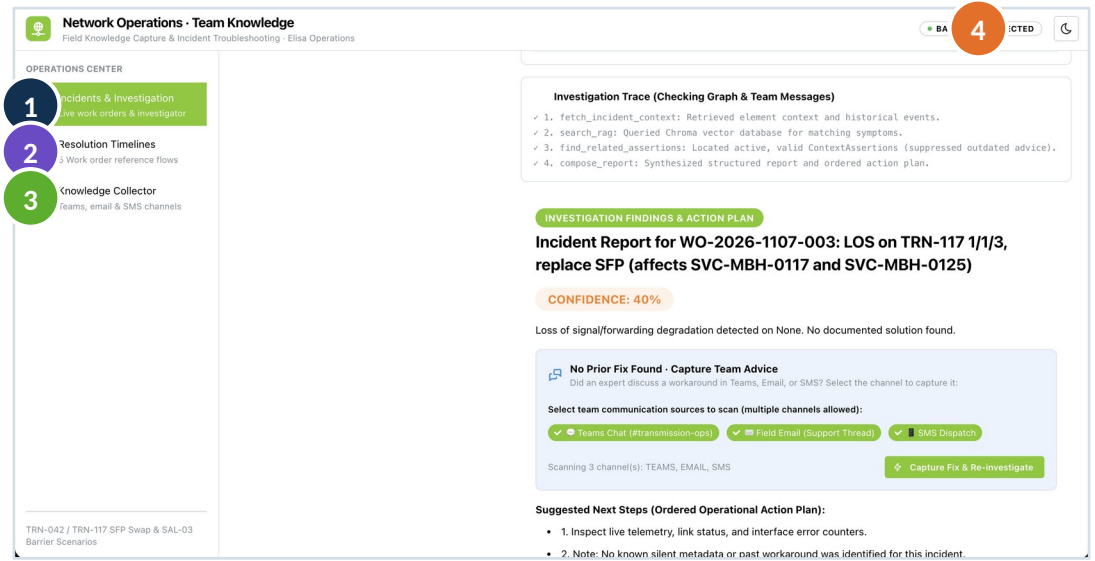

1 Incidents & Investigation
Work orders, the AI investigation and the capture button


2 Resolution Timelines
How knowledge was missed, captured and used in 5 cases

3 Knowledge Collector
Capture, service health and the raw messages

4 Backend status
Green "BACKEND CONNECTED" means everything is running

1 · Investigate an incident


1. Open Incidents & Investigation
2. Pick the work order. Open cases have a red banner
3. Click Investigate Incident
4. Watch the four steps of the AI trace
5. Read the confidence and the plan

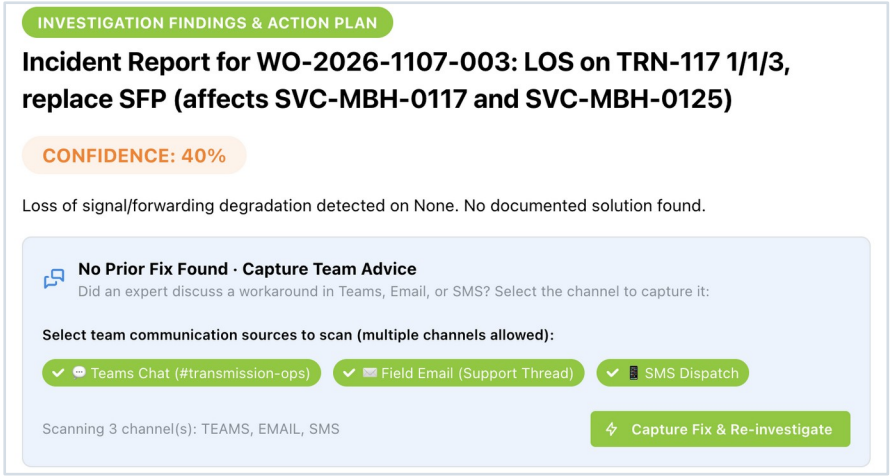

No fix known? buildR says so honestly (40%) and never guesses. Go to step 2: capture.

2 · Capture team knowledge

1. In the card "No Prior Fix Found", check the channels: Teams, Email, SMS
2. Click Capture Fix & Re-investigate
3. Wait about 2 seconds
4. The investigation runs again by itself

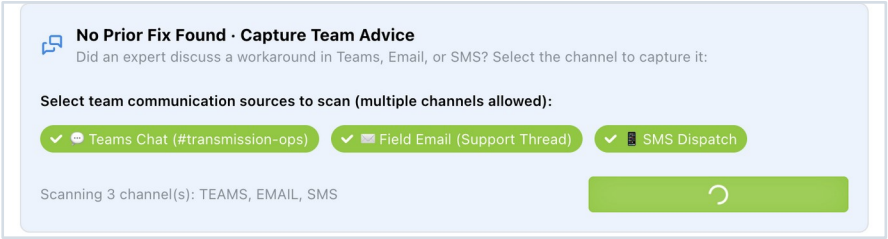

WHAT HAPPENS IN THE BACKGROUND

- Reads the newest messages in the chosen channels
- Keeps only real know-how, drops chit-chat
- Links it to the device, model, site and time
- Saves it once, even if you click again

3 · Read the answer


1 **Confidence**
100% = a valid, checked tip was found

2 **The workaround**
What to do and what NOT to do


3 **Source and date**
Who said it, where, and since when it is true

4 **Step-by-step plan**
Safe check first, reboot or new hardware last

Follow the steps in order. Stop when traffic is back.

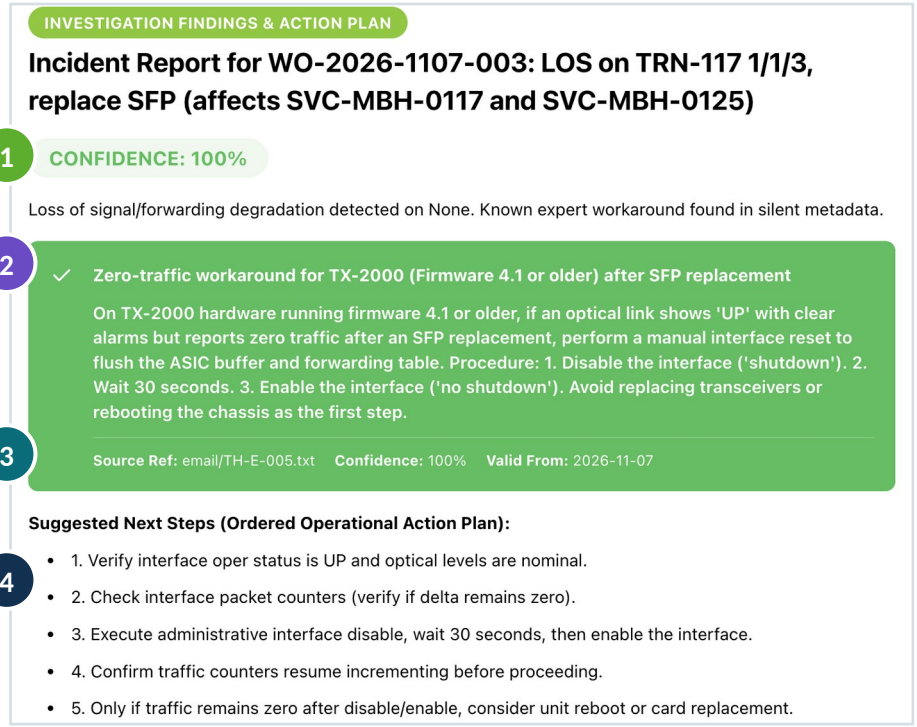

4 · See how knowledge grows

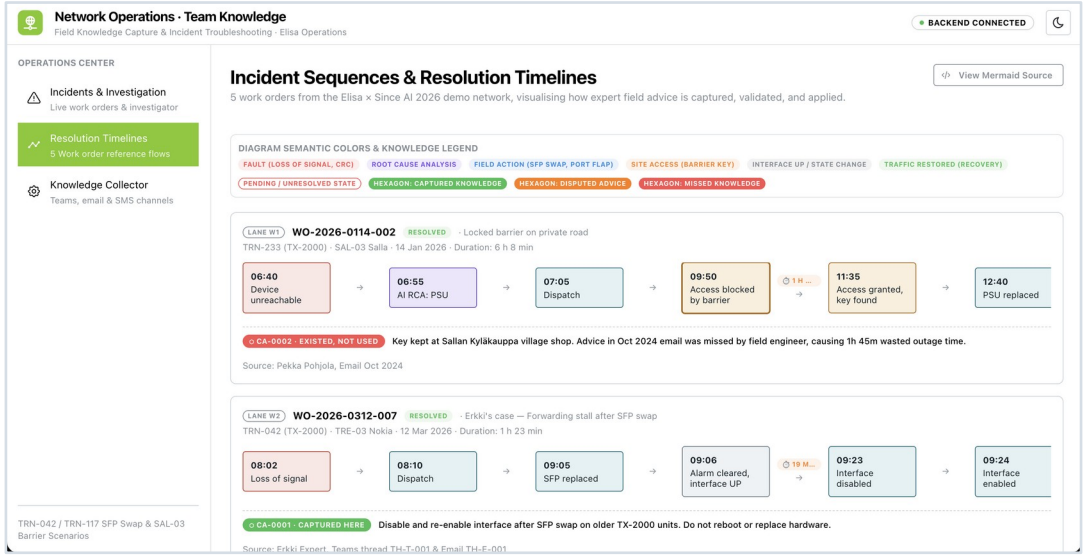

Each row is one work order, left to right in time. Badges below a row show the knowledge.

Captured — Knowledge saved from this case

Missed — It existed but nobody found it

Disputed — Two experts disagree

Click "View Mermaid Source" to see the diagram code.


5 · The Knowledge Collector page

1 **Seed Knowledge Graph**
Loads sites, devices and past cases

2 **Capture Team Knowledge**
Reads all channels at once

3 **Service health**
All four boxes should be green

4 **Raw channels**
Read the original Teams, email and SMS messages

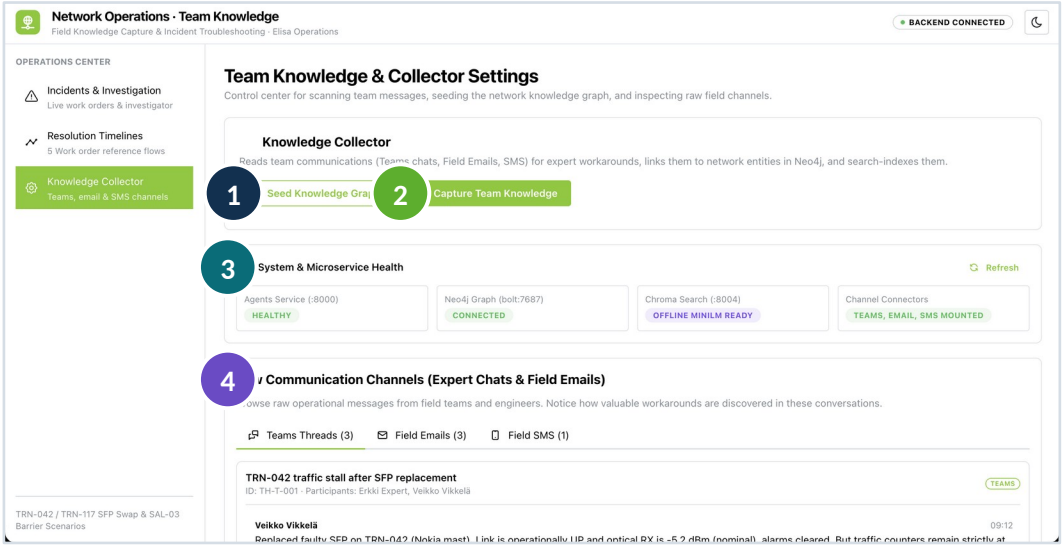

For experts: just keep talking

You do not need to do anything new. These small habits make your advice easier to reuse:

Name the device
"TRN-117 port 1/1/3", not just "the node"

Say the symptoms
"Link UP, alarms clear, counters at zero"

Say what worked
And what NOT to do: "don't reboot"

Say when it changes
"Since firmware 4.2 this is fixed"

No codes or passwords
Say who has them: "ask the NOC"

Confirm results
"Did that, traffic is back" proves the tip

If something goes wrong

Problem	What to do
App says backend not connected	Wait until docker compose ps shows all (healthy), then reload
Still 40% after capture	It was already captured once. Reset (below) and seed again
A port is already in use	Close the other program, or change the port in docker-compose.yml
Service stays "starting"	Look at the log: docker compose logs <service>
LLM errors in the log	Check LLM_API_KEY, or leave it empty to use offline mode

Reset to a clean demo:

```
docker compose down -v && docker compose up -d && curl -X POST localhost:8000/seed-graph
```

Quick reference



Web app
`http://localhost:3000`



API docs
`http://localhost:8000/docs`



Neo4j Browser
`http://localhost:7474`



Demo test
`./scripts/demo.sh`

Kiitos! Questions? Ask Team buildR