

Computer Studies, Chapter 7 – Java Basics

Exam Oriented MCQs, 7.1 Introduction

Q-1: Which of the following is an object-oriented programming language developed by Sun Microsystems?

- A. C language B. BASIC ~~C. Java~~ D. FORTRAN

Q-2: Which company had developed the object-oriented programming language JAVA?

- A. Microsoft ~~B. Sun Microsystems~~ C. Netscape D. Google

Q-3: Which of the following statement is true for Java language?

I. Java language was developed by Sun Microsystem.

II. Java is an object-oriented language.

III. Java is not platform-independent at both the source and binary level.

- ~~A. Only (I) and (II)~~ B. Only (II) and (III) C. Only (I) and (III) D. (I), (II) and (III)

Q-4: Which is considered as one of the ideal languages for distributing executable programs via the World Wide Web?

- A. C language ~~B. Java~~ C. C# D. Javascript

Q-5: What is the full form of JDK?

A. Java Developing Kit

~~B. Java Development Key~~

C. Java Demand Kit

~~D. Java Development Kit~~

Q-6: What is the full form of JVM?

A. Java Visibility Modifier

B. Java Visual Modem

~~C. Java Virtual Machine~~

D. Java Visual Machine

Q-7: Identify: "The machine language for the Java Virtual Machine".

A. Binary language

B. Machine language

C. Java Machine Language

D. Java bytecode

Q-8: Which code is faster to execute but not machine independent?

A. Byte code

~~B. Native~~

C. Program

D. Java binary

7.2 Creating Simple Java Application

Q-9: A Java program is composed of...

- A. Bytes B. Functions ~~C. Classes~~ D. Procedures

Q-10: What should be typed before the name of source file to compile Java program? OR

Which of the following command is given in JDK using Java interpreter?

- A. .java B. .class ~~C. javac~~ D. .program

Q-11: What should be the extension of Java source file?

- A. .class ~~B. .java~~ C. .javac D. .program

Q-12: What will be the extension of file, when the program gets compiled without errors?

- ~~A. .class~~ B. .java C. .javaclass D. .javac

Q-13: Which of the following are used as comments in Java programs?

- A. " " B. // C. /* ... */ ~~D. Both B & C~~

Q-14: In Java program, which methods are used to display results?

- A. System.out.print ~~B. System.out.println~~ C. Both A & B D. printf()

Q-15: Which method is called by Java interpreter, when we run the program?

- ~~A. Main()~~ B. Public class() C. Public args[] D. Package()

Q-16: Which of the following routine can call other subroutines that are defined in the same class or even in other classes?

- A. Public class() B. Public args[] C. Private class() ~~D. main()~~

Q-17: Which word in the first line of main() indicates that this routine can be called from outside the program?

- A. Private ~~B. Public~~ C. Package D. Void

7.3 Using SciTE

Q-18: Which option is used to create new file in SciTE application?

- A. Edit->New B. Insert->New ~~C. File->New~~ D. Tools->New


Q-19: Which of the following editor is used to create Java file in Ubuntu?

- A. Writer ~~B. Scite~~ C. Calc D. Wordpad

Q-20: Which of the following is right when Java file is created?

- A. Java Source file & Class name must be same B. Name must start with Number '2' only
C. Java source file and class name must be different D. Name must have symbol '\$' at the end

Q-21: Which of the following is missing from compilation process to execute Java Application?

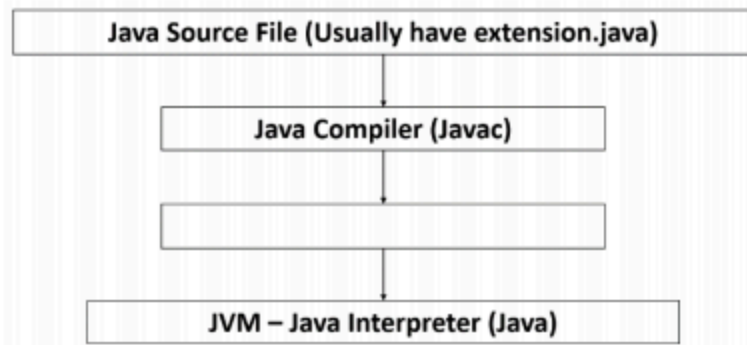

- A. Java Bytecode file (*.class) B. Java Bookcode file (*.cla)
C. Java Bytecode file (*.csc) D. Java Compiler code (*.javacr)

Q-22: Which option is used to save the source program in a file?

- A. File -> Save B. Edit -> Save C. Insert -> Save D. Tools -> Save

Q-23: Which of the following option is used to compile source program?

- A. File -> Compile B. Tools -> Compile
C. Edit -> Compile D. Windows -> Compile

Q-24: Which option is used to execute the program, if the program is compiled without any error?

- A. Program -> Run B. Run -> Program C. Tools -> Run D. Tools -> Go

7.4 Structure of a Java Program

Q-25: Which is a free format language?

- ~~A. Java~~ B. Visual Basic C. SQL D. My SQL

7.5 Data Types

Q-26: Which of the following can determines the required memory size, type of values, range of values and of operations that can be performed?

- A. Structure of program ~~B. Data type~~ C. Syntax of language D. Program code

Q-27: How many primitive data types are supported by Java?

- A. Ten B. Six C. Five ~~D. Eight~~

Q-28: Which of the following data types hold?

- A. Short, int, float and char B. Byte, int, short, and ~~long~~
C. Int, double, char and Boolean D. Long, float, double and char

Q-29: Which of the following data types hold real numbers such as 5.6, -129.35?

- ~~A. Float and Double~~ B. Int and Float C. Byte and Double D. Double and Long

Q-30: Which data type holds a single character from the Unicode character set?

- A. Boolean B. Long ~~C. Char~~ D. Byte

Q-31: Which data type holds one of the two logical values true or false?

- A. Byte B. Short C. Double ~~D. Boolean~~

Q-32: Which data types are built into the system?

- ~~A. Primitive~~ B. Secondary C. String D. Array

Q-33: What is the storage space used by "byte" data type?

- A. 2 bytes ~~B. 1 byte~~ C. 4 bytes D. 8 bytes

Q-34: What is the range of values for "byte" data type?

- ~~A. -128 to 127~~ B. -32768 to 32767
C. True, False D. 16-bit Unicode Character

Q-35: What is the storage space used by "short" data type?

- A. 8 bytes B. 1 byte C. 4 bytes ~~D. 2 bytes~~

Q-36: What is the range of values for "short" data type?

- A. -128 to 127 B. 10 ± 38 with about 7 significant digits
~~C. -32768 to 32767~~ D. 16 – bit Unicode character

Q-37: What is the storage space used by "int" data type?

A. 8 bytes

~~B. 4 bytes~~

C. 2 bytes

D. 1 byte

Q-38: What is the range of values for "int" data type?

A. -128 to 127

B. 10 ± 38 with about 7 significant digits

C. -32768 to 32767

~~D. -2147483648 to 2147483647~~

Q-39: What is the storage space used by "long" data type?

A. 4 bytes

B. 1 byte

C. 2 bytes

~~D. 8 bytes~~

Q-40: What is the range of values for "long" data type?

A. -32768 to 32767

B. 10 ± 38 with about 7 significant digits

~~C. -9223372036854775808 to 9223372036854775807~~

D. 16-bit Unicode character

Q-41: What is the storage space used by "float" data type?

A. 1 byte

~~B. 4 bytes~~

C. 2 bytes

D. 8 bytes

Q-42: What is the range of values for "float" data type?

~~A. 10 ± 38 with about 7 significant digits~~

B. -32768 to 32767

C. -9223372036854775808 to 9223372036854775807

D. 16-bit Unicode character

Q-43: What is the storage space used by "double" data type?

A. 1 byte

~~B. 8 bytes~~

C. 2 bytes

D. 4 bytes

Q-44: What is the range of values for "double" data type?

A. 10 ± 38 with about 7 significant digits

B. -32768 to 32767

~~C. 10 ± 38 with about 15 significant digits~~

D. 16-bit Unicode character

Q-45: What is the storage space used by "char" data type?

A. 1 byte

~~B. 2 bytes~~

C. 8 bytes

D. 4 bytes

Q-46: What is the range of values for "char" data type?

A. 10 ± 38 with about 7 significant digits

B. -32768 to 32767

~~C. 16-bit Unicode character~~

D. 10 ± 38 with about 15 significant digits

Q-47: What is the storage space used by "boolean" data type?

- A. 4 bytes B. 2 bytes C. 8 bytes ~~D. 1 byte~~

Q-48: What is the range of values for Boolean data type?

- A. ~~true, false~~ B. -32768 to 32767
C. 16-bit Unicode Character D. 10 ± 38 with about 7 significant digits

Q-49: What is the default value of Boolean data type of Java?

- ~~A. False~~ B. True C. 0 (Zero) D. 1

Q-50: What is the range to store signed values for integer numbers with b bits precision?

- A. $2^{b-1}-1, 2^{b-1}$ B. $2^{b-1}, 2^{b-1}$ C. $2^{b-1}, 2^{b-1}-1$ ~~D. $-2^{b-1}-1, 2^{b-1}$~~

Q-51: What is the range to store unsigned values for integer numbers with b bits precision?

- A. $-2^{b-1}, 2^{b-1}$ B. $-2^{b-1}, 0$ ~~C. $0, 2^{b-1}$~~ D. $0, 2^{b-1} - 1$

Q-52: Which types of numbers are compliant with IEEE 754 standard?

- A. Integer B. Long ~~C. Real~~ D. Boolean

Q-53: Which of the following is an international standard for defining floating-point numbers and arithmetic?

- A. Java B. C++ ~~C. IEEE 754~~ D. C#

7.6 Variable

Q-54: Identify: "A name used to refer to the data stored in memory".

- ~~A. Variable~~ B. Keyword C. Unicode character D. Datatype

Q-55: Which of the following can take different values at different times during the execution of the program but always refers to the same memory location?

- A. Keywords ~~B. Variable~~ C. Comments D. Literals

Q-56: Which of the following always refers to the same memory location?

- A. Comments B. Datatypes ~~C. Variables~~ D. Literals

Q-57: Which of the following is proper syntax of variable declaration in Java?

- A. <variable-names>{type-name}; B. {variable-names}<type-name>;
C. <type-name><variable-names>; ~~D. <type-name>{variable-names};~~

Q-58: In syntax of variables declaration, which brackets denote the item to be specified by user?

- A. < > B. { } C. Both A & B D. None

Q-59: Which of the following information will be determined with <type-name>?

- A. Size of variable B. The values it can hold
C. The operation that can be performed on it D. All A, B & C

Q-60: Which of the following is not proper to begin variable name?

- A. An alphabet B. Hash(#) C. Underscore(_) D. Dollar(\$)

Q-61: Which term is used for variable name, when sometimes first alphabet of each word is capitalized?

- A. Upper case B. Lower case C. Toggle case D. Camel case

Q-62: From the following which is the illegal name of variable in Java?

- A. 4me B. result C. amounts D. price

Q-63: Which of the following is example of Camel case?

- A. Balance_amount B. bALANCEaMOUNT C. BalanceAmount D. balance_amount

Q-64: How many types of variables are available in JAVA?

- A. Six B. Three C. Five D. Eight

Q-65: Which variables are available in Java?

- A. Instance, class and local B. Class, local and modular
C. Local, Functional and Procedural D. None of these

Q-66: Which of the following are considered as local variables?

- A. Function parameters B. Variables declared in the function
C. Both A & B D. Variables declared in the class

Q-67: Which variables are not initialized with default values?

- A. Modular B. Local C. Procedural D. Functional

7.7 Literals

Q-68: Identify: "A name used for a constant value in Java".

- A. Variable B. Identifier C. Literal D. Keyword

Q-69: Which literals are used to represent integer or real numbers?

- A. String B. Number C. String D. Boolean

Q-70: Which literals are whole numbers?

- A. Integer B. Character C. Boolean D. String

Q-71: What is the base of decimal literals?

- A. 8 B. 16 C. 2 D. 10

Q-72: What is the base of octal literals?

- A. 10 B. 8 C. 16 D. 2

Q-73: What is the base of hexadecimal literals?

- A. 16 B. 10 C. 8 D. 2

Q-74: Which type will be considered automatically when a decimal literal gets larger size than "int"?

- A. Byte B. Double ~~C. Long~~ D. Boolean

Q-75: Which symbols are appended as a suffix for long literals?

- A. L B. I C. Both A & B D. long

Q-76: What is the range of octal numbers?

- A. 0 to 8 B. ~~0~~ to 7 C. 1 to 8 D. 1 to 7

Q-77: Which numeric digits are used for Hexadecimal numbers (16 digits) in integer literals in Java?

- A. 0 to 8 and A to E B. 0 to 9 and A to F C. 0 to 15 D. 0 to 16

Q-78: Which of the following is a proper octal number?

- A. 59327 B. -8213245 C. 1237L D. 04523

Q-79: How many digits are used by hexadecimal numbers?

- A. 10 ~~B. 16~~ C. 6 D. 8

Q-80: In hexadecimal, which letters represent 10 to 15 respectively?

- A. ~~A to F~~ B. A to H C. 10 to 15 D. F to A

Q-81: Which of the following are prefix of hexadecimal numbers?

- A. 0x B. 0X ~~C. Both A & B~~ D. 0A

Q-82: Which of the following numbers are used in character literals to represent arbitrary Unicode characters?

- A. Decimal B. Binary C. Octal ~~D. Hexadecimal~~

Q-83: Which of the following is an example of Unicode literal?

- A. ~~\u00E9~~ B. 0X00E9 C. 000E9 D. 0b00E9

Q-84: Which of the following are the binary prefix in Java 7?

- A. 0b B. 0B ~~C. Both A & B~~ D. 0X

Q-85: Which literals are called floating point literals?

- A. ~~Real numbers~~ B. Long C. Byte D. int

Q-86: How many standards are there to represent real number literal?

- A. One ~~B. Two~~ C. Three D. Four

Q-87: Which of the following are notations of Real number literals?

- A. Standard B. Scientific ~~C. Both A & B~~ D. Unicode

Q-88: In which type of notation, the integer part and the fractional part are separated with decimal point?

- A. ~~Standard~~ B. Scientific C. Unicode D. Binary

Q-89: In which type of notation, a number is followed by letter 'e' and a signed integer exponent?

- A. Standard B. Unicode ~~C. Scientific~~ D. Decimal

Q-90: Which of the following Characters denote scientific notation in real number literals?

- A. Letter 'S' B. Letter 'e' C. Letter 'E' ~~D. Both B & C~~

Q-91: Which of the following is an example of standard notation?

- A. ~~12.37~~ B. 12.37e-108 C. 1.3E12 D. 1.3b12

Q-92: Which notation can be used to express very large and very small numbers?

- A. Binary B. Standard ~~C. Scientific~~ D. Unicode

Q-93: Which is the default type for floating point literal?

- A. Long ~~B. Double~~ C. Byte D. Short

Q-94: Which of the following statement is right for Boolean literals in Java?

- I. 0 is treated as false and 1 is treated as true.
II. Literals are to be typed without quotes.
III. For the Boolean type, there are two literals: true and false

- A. Only (i) and (ii) B. Only (ii) and (iii) C. Only (i) and (iii) ~~D. (i), (ii) and (iii)~~

Q-95: Which of the following characters should be appended as a suffix to make a literal of type float?

- A. D B. F C. f ~~D. Both B & C~~

Q-96: Which two literals represent Boolean type in Java?

- A. 0 and 1 ~~B. True and False~~
C. Decimal and Binary D. Standard and Scientific

Q-97: Which of the following literals are expressed by a single character surrounded by single quotes?

- A. Boolean B. String ~~C. Character~~ D. Integer

Q-98: Which of the following is used to store characters?

- A. 32-bit Unicode B. 8-bit Unicode C. 4-bit Unicode ~~D. 16-bit Unicode~~

Q-99: Which 'escape character' is used in special character literals?

- ~~A. \ (back slash)~~ B. / (forward slash) C. \$ D. #

Q-111: What is string?

- A. Special characters B. Group of symbols ~~C. Sequence of characters~~ D. Single digit

Q-112: Which symbol is used to represent string literals?

- ~~A. Double quotes~~ B. Single quotes C. Hash D. Dollar

Q-113: Which Unicode sequence produces a trademark symbol (™)?

- A. \u1212 B. \u2120 ~~C. \u2122~~ D. \u1220

7.8 Comments

Q-114: What is important to make the program easy to understand for everyone? OR

From the following which is not compiled or interpreted in Java?

- A. Program code B. Class name C. Variables ~~D. Comments~~

Q-115: Which delimiter denotes single line comment in Java?

- ~~A. //~~ B. /* */ C. # D. \$

Q-116: Which delimiter is used for multiline comment?

- A. % B. \$ C. // ~~D. /* */~~

Q-117: Which delimiter is used as beginning of Document comment?

- A. // B. /* ~~C. /**~~ D. \$

Q-118: Which delimiter is used to end document comment?

- ~~A. */~~ B. **/ C. /* D. //

Q-119: Which comments are used for creating API documentation from the code?

- A. // B. /* */ ~~C. /** **/~~ D. \\

Q-120: Which are the special comments used for Javadoc system? OR

Which comments are used for creating API documentation from the code?

- A. Multi-line ~~B. Documentation~~ C. Single-line D. API

Q-121: Which of the following is not used for comment in Java?

- A. // B. /* ... */ ~~C. /** ... */~~ D. /** ... */

7.9 Expressions

Q-122: Which of the following is an essential part of programming?

- A. Expressions ~~✓~~ B. Comments C. Literals D. Variables

7.10 Operators

Q-123: Which of the following are special symbols used to build an expression?

- A. Literals ~~B. Operators~~ C. Function call D. Brackets

Q-124: Which of the following is not a proper type of Java operator?

- A. Logical B. Assignment ~~C. Global~~ D. Conditional

Q-125: Which operators can be used as unary?

- A. % and / B. * and / C. + and * ~~D. + and -~~

Q-126: Which symbol is used as Modulus operator?

- ~~A. %~~ B. / C. \$ D. None

Q-127: What will be the result of arithmetic expression 9%2?

- A. 4.5 ~~B. 1~~ C. 4 D. 0

Q-128: How many operands are required by Arithmetic operators?

- A. One only B. More than five C. Many ~~D. Two~~

Q-129: What will be the data type of result when both operands are integers?

- A. Float ~~B. Integer~~ C. Char D. Unicode

Q-130: What will be the data type of result when both operands are float?

- ~~A. Float~~ B. Integer C. String D. Unicode

Q-131: Identify: "The lower range data type is implicitly converted to higher data type to have the same types of operands".

- A. Casting B. Cast typing ~~C. Promotion~~ D. Range cast

Q-132: Which operator is used to concatenate string?

- A. % B. \$ ~~C. +~~ D. =

Q-133: Which of the following method prints a message to the standard output device?

- A. System.print() B. ~~System.out.println()~~ C. System.in.print() D. System.in.println()

7.11 Increment and Decrement Operators

Q-134: Which of the following operators are known as increment or decrement operator?

- A. Unary + or - B. Binary + or - C. Binary ++ or -- ~~D. Unary ++ or --~~

Q-135: For which data types increment/decrement operators are applicable?

- A. ~~Integer, Char~~ B. Char, String C. Integer, float D. Integer, string

Q-136: What is it called when ++ operator is used after variable name in Java?

- A. ~~Post increment~~ B. Pre increment C. increment pre D. Pre decrement

Q-137: What will be the value of variable 'Y', after execution where $Y = 6 + x++$; and $x = 3$?

- A. 10 B. 6 ~~C. 9~~ D. 4

Q-138: What will be the value of variable 'Z', after execution where $Z = ++x - y--$; $x = 5$ and $y = 7$?

- A. 1 B. -2 C. -1 D. 2

Q-139: Which of the following statement is standalone statement?

- A. $Y = x++ + 3$ B. $++x$ C. $Z = P-- + 3$ D. $R = ++P + Q$

7.12 Comparison Operators

Q-140: Which operators are known as relational operators?

- A. Increment B. Decrement ~~C. Comparison~~ D. Logical

Q-141: Which of the following is not a comparison operator in Java?

- A. $<=$ B. $>=$ ~~C. $=$~~ D. $!=$

Q-142: Which of the following is 'not equal to' comparison operator in Java?

- ~~A. $!=$~~ B. $==$ C. $<>$ D. NOT

Q-143: The other name/s of Comparison operators is/are ...

- A. Logical ~~B. Relational~~ C. Boolean-valued D. Both B & C

Q-144: Which operators are used in if statement and loops?

- A. Logical ~~B. Relational~~ C. Increment D. Decrement

Q-145: From the following which is not a comparison operator in Java?

- A. > B. < C. <= ~~D. +~~

7.13 Logical Operators

Q-146: What is the other name of Logical operators?

- ~~A. Boolean~~ B. Comparison C. Relational D. Arithmetic

Q-147: Which operator is used for Logical AND operation?

- ~~A. &&~~ B. || C. ^ D. !

Q-148: Which operator is used for Logical OR operation?

- A. ! ~~B. ||~~ C. ^ D. &&

Q-149: Which operator is used for Logical XOR operation?

- A. && B. || ~~C. ^~~ D. !

Q-150: Which operator is used for Logical NOT operation?

- A. || B. && C. ^ ~~D. !~~

Q-151: Which logical operator returns true only if its operands are different (one true one false) and false otherwise?

- ~~A. XOR~~ B. OR C. And D. NOT

Q-152: In Java, which logical operator results in complemented result?

- ~~A. NOT~~ B. AND C. OR D. XOR

7.14 Conditional Operators

Q-153: What is the other name for the conditional operator?

- ~~A. Ternary~~ B. Logical C. Arithmetic D. Assignment

Q-154: Which Symbols are used in the conditional operator?

- A. ? and ; B. \$ and % ~~C. ? and :~~ D. – and ?

Q-155: Which expression will be evaluated if the Boolean expression's value is true?

- A. Boolean expression ~~B. Expression1~~ C. Expression2 D. Expression3

Q-156: If the conditional statement is $\text{next} = (\text{N}\%2=0) ? (\text{N}/2) : (3*\text{N}+1)$; Where $\text{N} = 7$ then what will be the value of variable next?

- A. 22 B. 7 C. 3.5 D. 0

7.15 Assignment

Q-157: Which of the following is known as Assignment operator?

- ~~A. =~~ B. + C. & D. ==

7.16 Shorthand Assignment Operator

Q-158: How many operands are used in shorthand assignment operator?

- A. Zero B. One ~~C. Two~~ D. Three

Q-159: Which of the following is similar to $a = a + b$?

- A. $a = ab$ B. $a = a * b$ C. $a =+ b$ ~~D. $a += b$~~

Q-160: Which of the following is same as the expression $q = q \&\& p$?

- A. $q = \&\& p$ ~~B. $q \&\&= p$~~ C. $q = q + p$ D. $q = q * p$

7.17 Type Case

Q-161: Identify: "In some cases, we may want to force a conversion that wouldn't be done automatically"

- ~~A. Typecase~~ B. Assignment C. Datatype D. Relational

7.18 Precedence and Associativity of Java Operators

Q-162: In Java, on which basis the operators are evaluated?

- A. Priority B. Precedence ~~C. Both A & B~~ D. Relational

Q-163: How many types of control structures are there in Java?

- A. One ~~B. Two~~ C. Three D. Four

7.19 Control Structures

Q-164: Identify: "The statements that enable to control the flow of execution."

- ~~A. Control structures~~ B. Blocks C. Selective structure D. Scope of variables

Q-165: How many types of loops are available?

- A. One B. Two ~~C. Three~~ D. Four

Q-166: Which of the following are type of control structures?

- A. Scope and Blocks B. Pairs of braces {} C. Comments ~~D. Loops and Branches~~

Q-167: Which of the following are used to repeat a sequence of statements over and over until some condition occurs?

- A. Scope B. Block C. Priority ~~D. Loops~~

Q-168: Which of the following are used to choose among two or more possible courses of action?

- A. Loops ~~B. Branches~~ C. Scope D. Precedence

Q-169: What is the alias of word "Branches"?

- A. Scope of variables B. Block of statements ~~C. Selective structures~~ D. Loops

Q-170: Which of the following is not an example of Control structure?

- A. Conditional ~~operators~~ B. If statement C. For loop D. Switch statement

Q-171: What is the meaning of Block statement?

- A. Scope of variables B. Loops ~~C. Group of statements~~ D. Branches

Q-172: Which braces are used to enclosed block statement?

- A. [] B. () C. < > ~~D. { }~~

Q-173: What are the purposes of block statement?

- A. To group a sequence of statements into a unit B. To group logically related statements
C. To create variables with local scope within a block ~~D. All A, B & C~~

Q-174: What will be the type of variable, when we declare variables inside a block?

- ~~A. Local~~ B. Loop C. Branch D. Operator

Q-175: Which variables will cease to exist after the block?

- A. Branch ~~B. Local~~ C. Assignment D. Loop

Q-176: Which statement is used to take one of two alternative courses of action, depending on whether the value of a given Boolean-valued expression is true or false?

- A. For loop B. While loop ~~C. If~~ D. Switch

Q-177: "If statement" is an example of which control structures?

- A. Decision B. Selective C. Branching ~~D. All A, B & C~~

Q-178: What will be evaluated first, when if statement is executed?

- A. Statement 1 B. Statement 2 ~~C. Boolean expression~~ D. Public class

Q-179: Which statement block will be executed, if Boolean expression's value is true?

- A. Statement 4 B. Statement 3 C. Statement 2 ~~D. Statement 1~~

Q-180: Which block of statement will be executed, when Boolean expression's value is false?

- A. Statement 1 ~~B. Block of statements written after keyword else~~
C. Block of statements written after if statement D. Exit

Q-181: When an if statement is used in another if statement, it is called...

- A. Scope of variables B. Statement of blocks ~~C. Nested-if statement~~ D. Loops

Q-182: Which of the following statement is used when there are many alternative actions to be taken depending the value of a variable or expression?

- ~~A. Switch~~ B. For C. While D. Do...while

Q-183: Which data types are valid for the test expression of Switch statement?

- A. Byte or float B. String or float C. String or byte ~~D. Byte, char, short or int~~

Q-184: In Switch statement, if a match is found than which statement will be executed?

- A. Default ~~B. Case~~ C. Switch D. Exit

Q-185: In Switch statement, if a match if not found than which statement will be executed?

- ~~A. Default~~ B. Case C. Continue D. Exit

Q-186: Which of the following is optional?

- A. Case ~~B. Default~~ C. Both A & B D. None of these

Q-187: Which statement is used to jump at the first statement after the end of Switch?

- A. Case B. Default C. Continue ~~D. Break~~

7.20 Repetitive Control Structures

Q-188: How many looping structures are supported by Java?

- A. One B. Two ~~C. Three~~ D. Four

Q-189: Which of the following are looping structures of Java?

- A. If, For, While ~~B. While, For, Do...while~~ C. If, Switch, For D. For, If, Do...While

Q-190: Which of the following is correct syntax of for loop?

- A. ~~for (exp1; exp2; exp3) {statement}~~ B. for (exp) {statements}
- C. for {statements} (exp); D. for {statements} (exp1; exp2; exp3)

Q-191: Which of the following is correct syntax of while loop?

- A. while (exp1; exp2; exp3) {statements} ~~B. while (exp) {statements}~~
- C. while {statements} (exp); D. while {statements} (exp1; exp2; exp3)

Q-192: Which of the following is correct syntax of do...while loop?

- A. do (exp1; exp2; exp3) {statements} B. do (exp) {statements}
- C. do {statements} (exp); D. do {statements} (exp1; exp2; exp3)

Q-193: Which of the following loops are entry-controlled loops?

- ~~A. For and while~~ B. While and do...while C. Do...while and for D. While and if

Q-194: What is the other name of entry-controlled constructs?

- A. Post-test B. Entry-test C. Exit-test ~~D. Pre-test~~

Q-195: Which loop is generally used, when number of iterations are pre-determined?

- A. While ~~B. For~~ C. Do...while D. If

Q-196: In which loop all the three expressions are optional?

- A. While B. Do...while ~~C. For~~ D. Switch

Q-197: Which is first expression in for loop?

- A. Condition B. Iterator ~~C. Initializer~~ D. Break statement

Q-198: Which is second expression in for loop?

- A. Initializer ~~B. Condition~~ C. Iterator D. Break statement

Q-199: Which is third expression in for loop?

- A. Case statement B. Initializer C. Condition ~~D. Iterator~~

Q-200: Which of the following loop is exit-controlled loop?

- ~~A. Do...while~~ B. For C. While D. Continue

Q-201: In which loop statements of loops are executed at least once?

- ~~A. Do...while~~ B. For C. While D. Break

Q-202: Which statement is used to transfer the control outside switch or loop structure?

- A. Continue B. Exp1 C. Exp3 ~~D. Break statement~~

Q-203: Which of the following statement skips all the following statements and control is transferred at the first statement after the end of switch statement?

- A. Continue ~~B. Break~~ C. Condition D. Iterator

Q-204: Which statement is used to exit the loop?

- A. Iterator ~~B. Break~~ C. Continue D. Condition

Q-205: Which statement is used to skip the following statements in a loop and continue with the next iteration?

- A. Iterator ~~B. Break~~ C. Continue D. Initializer

Q-206: How can we invoke function sqrt() of the class Math?

- A. sqrt().Math B. sqrt() ~~C. Math.sqrt()~~ D. System.out.sqrt()