In [1]: import pandas as pd
 import numpy as np
 import seaborn as sns
 import matplotlib.pyplot as plt

In [2]: df=pd.read_csv(r"C:\Users\arshiha\Downloads\USA_Housing.csv")
 df

Out[2]:

	Avg. Area Income	Avg. Area House Age	Avg. Area Number of Rooms	Avg. Area Number of Bedrooms	Area Population	Price	Address
0	79545.458574	5.682861	7.009188	4.09	23086.800503	1.059034e+06	208 Michael Ferry Apt. 674\nLaurabury, NE 3701
1	79248.642455	6.002900	6.730821	3.09	40173.072174	1.505891e+06	188 Johnson Views Suite 079∖nLake Kathleen, CA
2	61287.067179	5.865890	8.512727	5.13	36882.159400	1.058988e+06	9127 Elizabeth Stravenue\nDanieltown, WI 06482
3	63345.240046	7.188236	5.586729	3.26	34310.242831	1.260617e+06	USS Barnett\nFPO AP 44820
4	59982.197226	5.040555	7.839388	4.23	26354.109472	6.309435e+05	USNS Raymond\nFPO AE 09386
4995	60567.944140	7.830362	6.137356	3.46	22837.361035	1.060194e+06	USNS Williams\nFPO AP 30153- 7653
4996	78491.275435	6.999135	6.576763	4.02	25616.115489	1.482618e+06	PSC 9258, Box 8489\nAPO AA 42991-3352
4997	63390.686886	7.250591	4.805081	2.13	33266.145490	1.030730e+06	4215 Tracy Garden Suite 076\nJoshualand, VA 01
4998	68001.331235	5.534388	7.130144	5.44	42625.620156	1.198657e+06	USS Wallace\nFPO AE 73316
4999	65510.581804	5.992305	6.792336	4.07	46501.283803	1.298950e+06	37778 George Ridges Apt. 509\nEast Holly, NV 2

5000 rows × 7 columns

In [3]: df.head()

Out[3]:

Address	Price	Area Population	Avg. Area Number of Bedrooms	Avg. Area Number of Rooms	Avg. Area House Age	Avg. Area Income	
208 Michael Ferry Apt. 674\nLaurabury, NE 3701	1.059034e+06	23086.800503	4.09	7.009188	5.682861	79545.458574	0
188 Johnson Views Suite 079\nLake Kathleen, CA	1.505891e+06	40173.072174	3.09	6.730821	6.002900	79248.642455	1
9127 Elizabeth Stravenue\nDanieltown, WI 06482	1.058988e+06	36882.159400	5.13	8.512727	5.865890	61287.067179	2
USS Barnett\nFPO AP 44820	1.260617e+06	34310.242831	3.26	5.586729	7.188236	63345.240046	3
USNS Raymond\nFPO AE 09386	6.309435e+05	26354.109472	4.23	7.839388	5.040555	59982.197226	4

In [4]: df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 5000 entries, 0 to 4999
Data columns (total 7 columns):

#	Column	Non-Null Count	Dtype
0	Avg. Area Income	5000 non-null	float64
1	Avg. Area House Age	5000 non-null	float64
2	Avg. Area Number of Rooms	5000 non-null	float64
3	Avg. Area Number of Bedrooms	5000 non-null	float64
4	Area Population	5000 non-null	float64
5	Price	5000 non-null	float64
6	Address	5000 non-null	object

dtypes: float64(6), object(1)
memory usage: 273.6+ KB

In [5]: df.describe()

Out[5]:


	Avg. Area Income	Avg. Area House Age	Avg. Area Number of Rooms	Avg. Area Number of Bedrooms	Area Population	Price
count	5000.000000	5000.000000	5000.000000	5000.000000	5000.000000	5.000000e+03
mean	68583.108984	5.977222	6.987792	3.981330	36163.516039	1.232073e+06
std	10657.991214	0.991456	1.005833	1.234137	9925.650114	3.531176e+05
min	17796.631190	2.644304	3.236194	2.000000	172.610686	1.593866e+04
25%	61480.562388	5.322283	6.299250	3.140000	29403.928702	9.975771e+05
50%	68804.286404	5.970429	7.002902	4.050000	36199.406689	1.232669e+06
75%	75783.338666	6.650808	7.665871	4.490000	42861.290769	1.471210e+06
max	107701.748378	9.519088	10.759588	6.500000	69621.713378	2.469066e+06


```
In [11]: df.columns
```


```
Out[11]: Index(['Avg. Area Income', 'Avg. Area House Age', 'Avg. Area Number of Rooms', 'Avg. Area Number of Bedrooms', 'Area Population', 'Price', 'Address'], dtype='object')
```

```
In [12]: sns.pairplot(df)
```

Out[12]: <seaborn.axisgrid.PairGrid at 0x26708b3ce50>

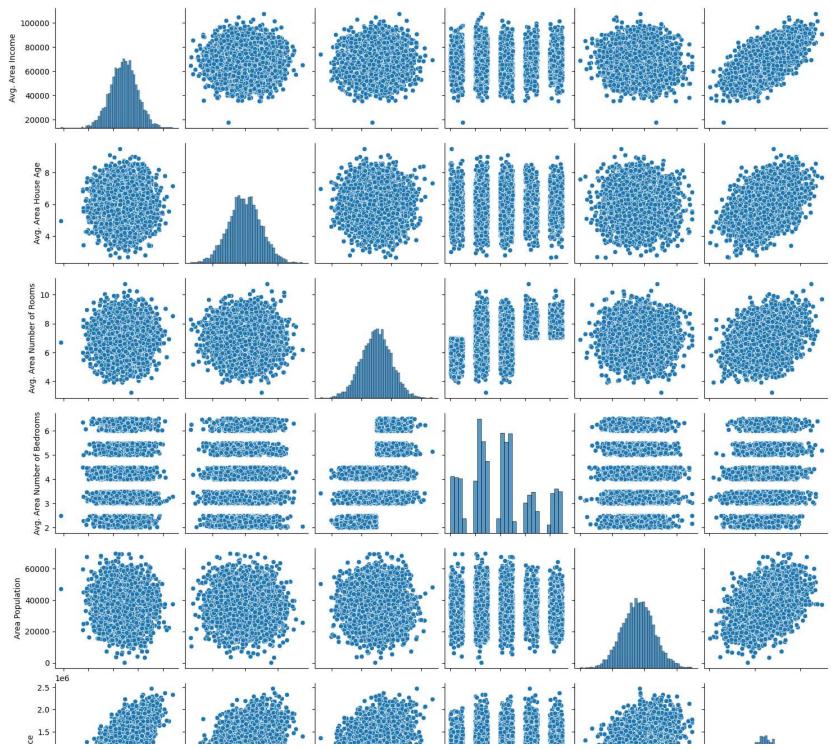




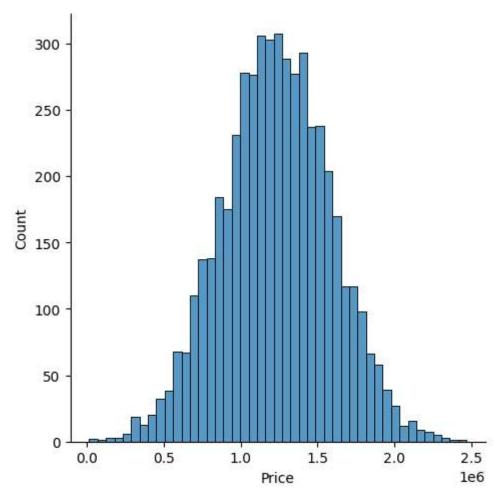


In [15]: sns.displot(df['Area Population'])

Out[15]: <seaborn.axisgrid.FacetGrid at 0x2670f0e20d0>

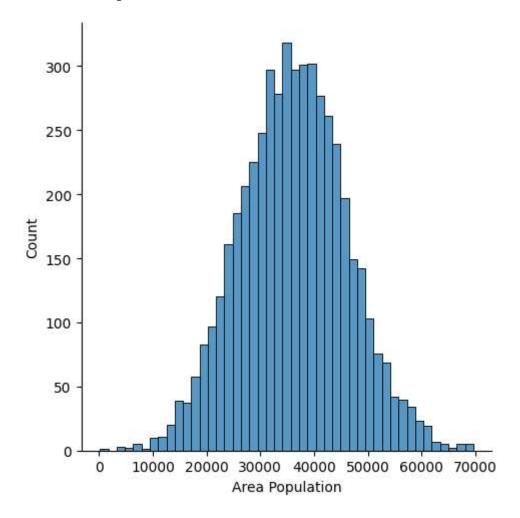


Out[26]: <Axes: >

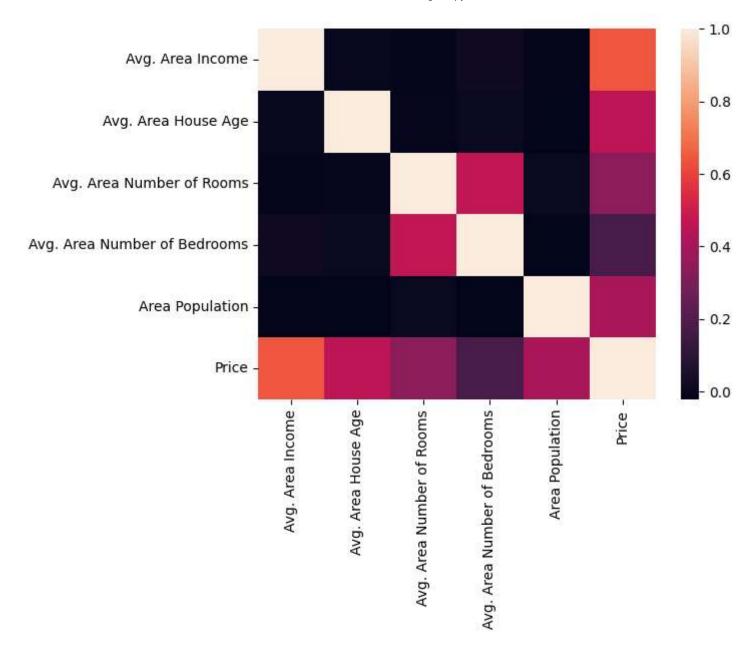


```
In [27]: x=Housedf[['Avg. Area Income', 'Avg. Area House Age', 'Avg. Area Number of Rooms',
                 'Avg. Area Number of Bedrooms', 'Area Population']]
         y=df['Price']
In [28]: from sklearn.model_selection import train_test_split
         x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.3,random_state=101)
         from sklearn.linear_model import LinearRegression
In [29]:
         lm=LinearRegression()
         lm.fit(x_train,y_train)
Out[29]:
          ▼ LinearRegression
          LinearRegression()
         print(lm.intercept_)
In [30]:
          -2641372.6673006266
         coeff df=pd.DataFrame(lm.coef ,x.columns,columns=['coefficient'])
In [31]:
         coeff df
Out[31]:
                                        coefficient
                      Avg. Area Income
                                         21.617635
                   Avg. Area House Age 165221.119872
             Avg. Area Number of Rooms 121405.376596
           Avg. Area Number of Bedrooms
                                       1318.718783
                       Area Population
                                         15.225196
```

In [32]: predictions=lm.predict(x_test)
plt.scatter(y_test,predictions)

Out[32]: <matplotlib.collections.PathCollection at 0x267104c1d10>

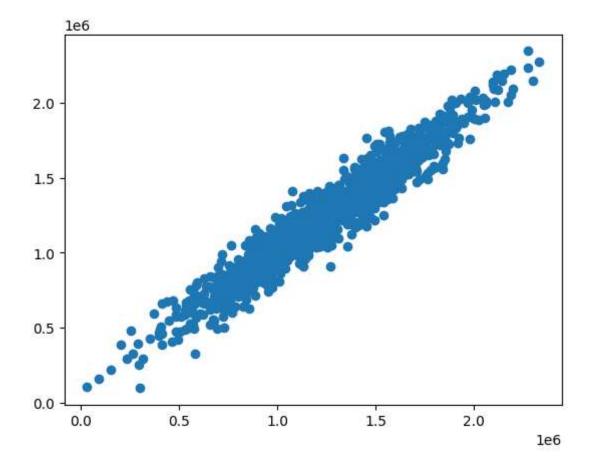

```
In [33]: sns.displot((y_test-predictions),bins=50);
```

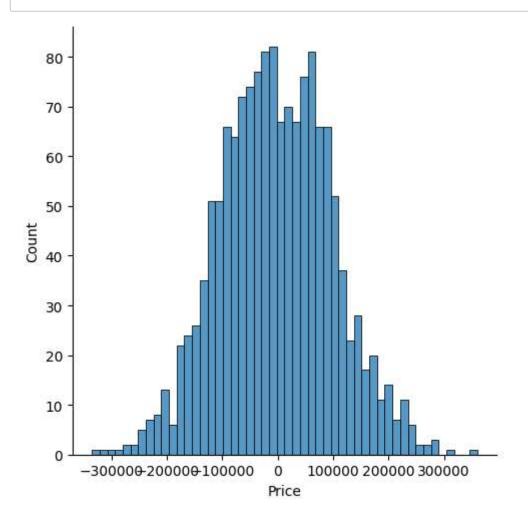

```
In [34]: from sklearn import metrics
    print('MAE:',metrics.mean_absolute_error(y_test,predictions))
    print('MSE:',metrics.mean_squared_error(y_test,predictions))
    print('RMSE:',np.sqrt(metrics.mean_squared_error(y_test,predictions)))
```

MAE: 81257.5579585557 MSE: 10169125565.89724 RMSE: 100842.08231634866 In []: