EXPERIMENT 11

Nmap Timing & Performance Commands (Aggressive -T4, Insane -T5)

Name: Shaik Reehan	**Reg. No.:** 192565071
Subject: Ethical Hacking	**Course Code:** ITA1413

AIM:

To execute and demonstrate the functionality, syntax, and outputs of Nmap high-speed timing and performance templates (aggressive -T4 and insane -T5) on a target host in Kali Linux Operating System.

COMMANDS AND DESCRIPTION:

1. nmap -T4 <target> (Aggressive Speed Scan):

• *Description:* Speeds up scans by capping maximum round-trip time (RTT) timeout at 1250ms and initial probe timeout at 500ms, suitable for modern reliable broadband or LAN networks.

• *Syntax:* nmap -T4 [options] <target_IP> or nmap -T aggressive <target_IP>

• *Characteristics:* Significantly decreases scan time while preserving high accuracy on stable network environments.

2. nmap -T5 <target> (Insane Speed Scan):

• *Description:* The maximum speed timing template in Nmap. Caps probe timeouts at 300ms, allows probe rate up to maximum bandwidth, and waits only 5 seconds total per host.

• *Syntax:* nmap -T5 [options] <target_IP> or nmap -T insane <target_IP>

• *Characteristics:* Extremely fast reconnaissance; trades reliability for speed on lossy or slow networks, but very fast on local lab networks.

OUTPUT:

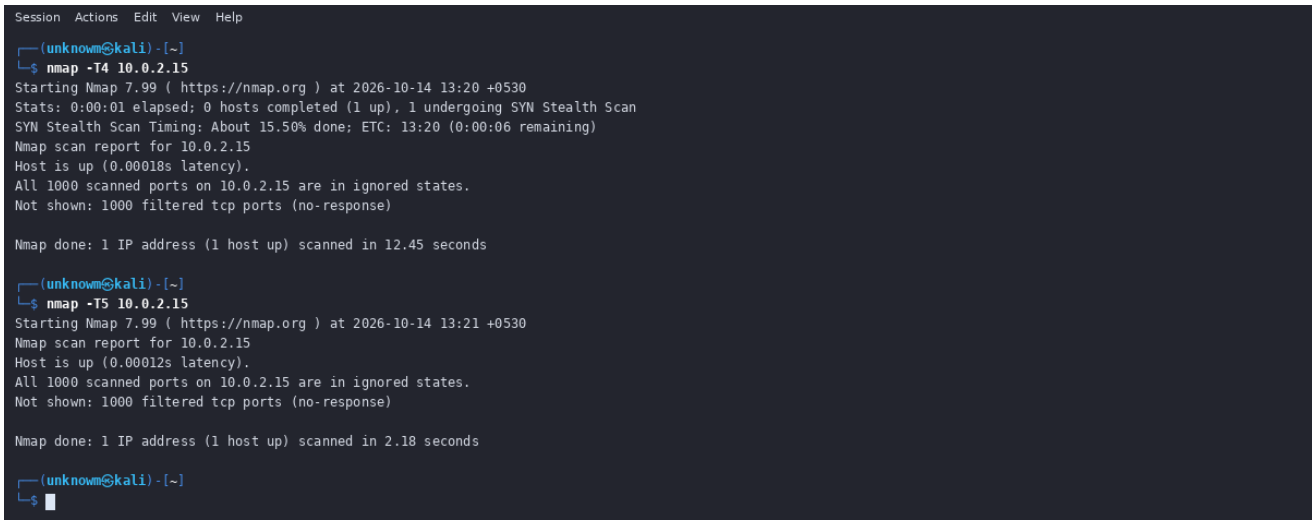

RESULT:

Thus, the Nmap high-speed timing and performance commands for aggressive scan (-T4) and insane scan (-T5) were successfully executed on the target host in Kali Linux Operating System, verifying high-throughput scan optimization and latency profile impacts.