

API Development Environment

LMS Assessment Supporting Documentation

Candidate	SHAIK MOHAMMAD SHAHEED
Assessment Topic	Topic 1 - LMS Assessment
Focus	Postman, REST API, HTTP GET, JSON, n8n
Workflow	API Development Environment - HTTP GET

This document records the completed API development environment assessment activities, including Postman workspace configuration, public REST API GET testing, n8n HTTP Request workflow execution, JSON response inspection, and exported workflow evidence.

1. Assessment Overview

The assessment evaluates the ability to configure a professional API development environment using Postman and n8n, understand client-server communication, execute HTTP GET requests, inspect JSON responses, and validate API interactions using industry-standard tools.

2. Objectives


- Configure Postman and create a personal workspace.
- Configure an n8n environment and create a workflow.
- Execute a GET request against a public REST API.
- Build an n8n workflow using the HTTP Request node.
- Inspect and analyze the returned JSON response.
- Verify successful execution and HTTP status information.

3. Tools and API Used

Tool / Resource	Purpose
Postman	Create workspace and test the public REST API with a GET request.
n8n Cloud	Build and execute the HTTP Request workflow.
JSONPlaceholder Users API	Public REST API endpoint used for the GET request.
Endpoint	https://jsonplaceholder.typicode.com/users

4. Exercise 1 – Postman Workspace Configuration

A personal Postman workspace named “API Development Environment” was created. The workspace provides the working area for API development and request testing.

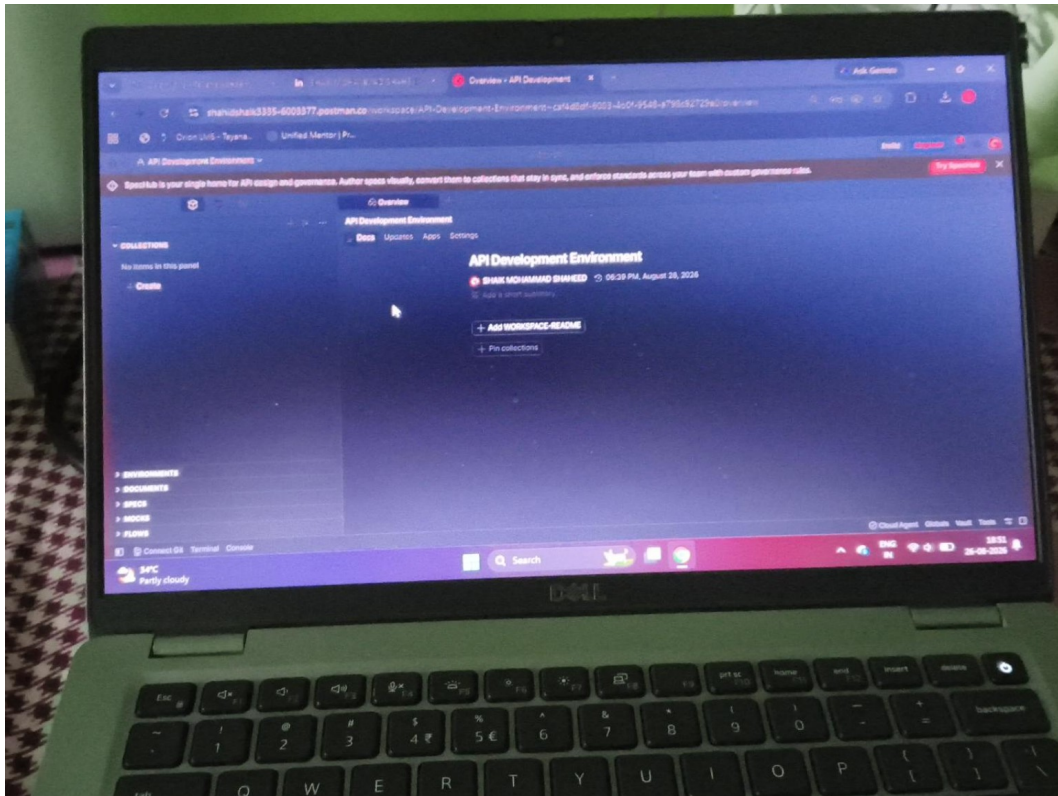


Evidence: Postman workspace overview showing the API Development Environment workspace.

5. Exercise 3 – Execute a GET Request in Postman

The public JSONPlaceholder Users API was called using the HTTP GET method. The request returned a successful HTTP response with status code 200 OK and a JSON response body.

Request: GET <https://jsonplaceholder.typicode.com/users>

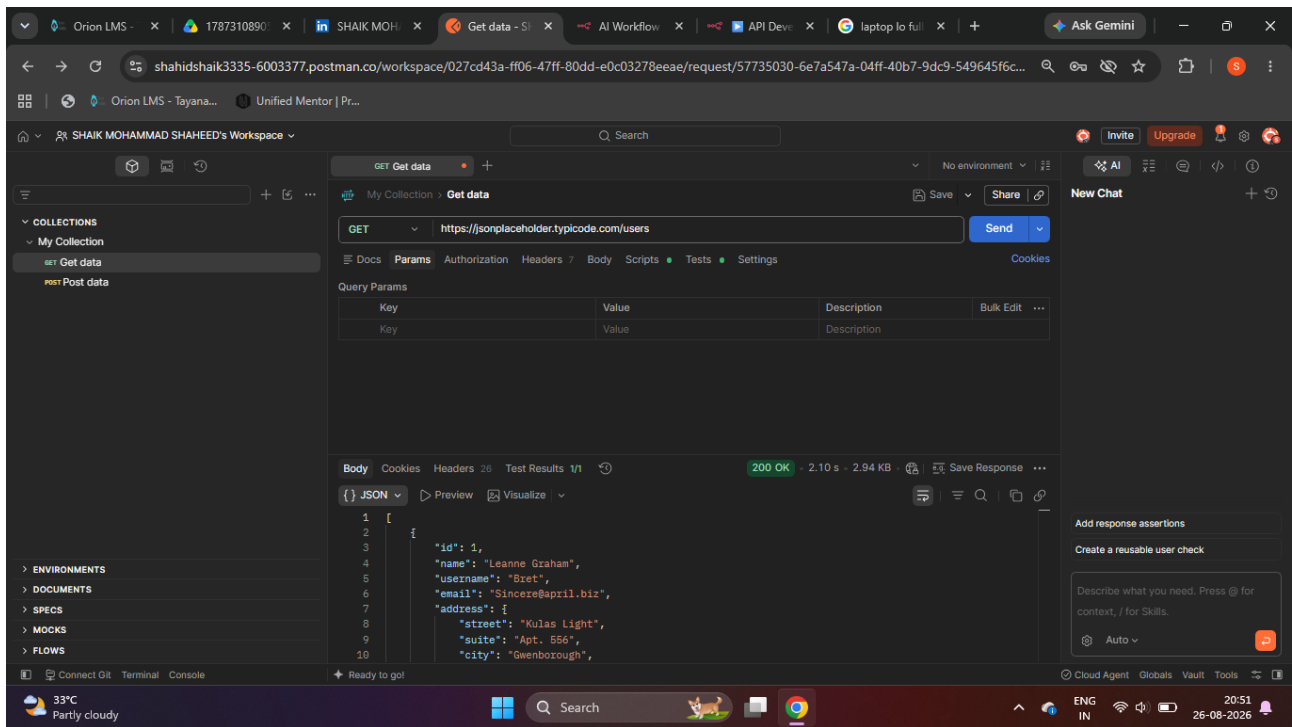

Verification: The screenshot shows the GET method, endpoint, 200 OK status, and returned JSON data.

6. Exercise 4 – n8n HTTP Request Workflow

An n8n workflow named “API Development Environment - HTTP GET” was configured with a manual trigger followed by an HTTP Request node. The HTTP Request node calls the same public API using a GET request and returns the user records as JSON output.

Workflow Component	Configuration / Result
Trigger	When clicking “Execute workflow” (Manual Trigger)
HTTP Request	GET request to https://jsonplaceholder.typicode.com/users
Execution	Successful
Returned records	10 items
JSON fields observed	id, name, username, email, address, phone, website, and related user data

The screenshot shows the n8n workflow editor interface. The workflow is named "API Development Environment - HTTP GET". It consists of two nodes: a "When clicking 'Execute workflow'" trigger node and an "HTTP Request" node. The HTTP Request node is configured with the URL "https://jsonplaceholder.typicode.com/users". The workflow has been executed successfully, as indicated by the "Success in 1.017s" message in the logs. The output table shows 10 items of user data, including fields like id, name, username, email, address, phone, and website.

id	name	username	email	address	phone	website
1	Leanne Graham	Bret	Sincere@april.biz	street : Kulas Light suite : Apt. 556 city : Gwenborough zipcode : 92998-3874 geo lat : -37.3159 lon : 81.1456	1-770-736-8031 x56442	hlgard.org

Evidence: n8n workflow canvas showing the Manual Trigger connected to the HTTP Request node, successful execution, and JSON output containing 10 items.

7. JSON Response Analysis

The API response is structured as a collection of user objects. Each object contains identifiable fields such as id, name, username, email, address, phone, website, and company-related information. The n8n output confirms that the HTTP Request node successfully received and exposed the JSON response.

8. Workflow Structure

The exported workflow contains two nodes and one main connection:

When clicking “Execute workflow” → HTTP Request

The exported n8n workflow JSON confirms the workflow name, Manual Trigger node, HTTP Request node, API URL, and the connection between the two nodes.

9. Practical Assessment Checklist

Requirement	Status
Postman installed / accessible	Completed
Personal workspace created	Completed
n8n configured	Completed
HTTP Request node configured	Completed
GET request executed	Completed
JSON response analyzed	Completed
Status code verified in Postman	200 OK
n8n workflow executed successfully	Completed
Screenshots captured	Completed
n8n workflow exported	Completed
Demo video	To be recorded
LMS submission	To be submitted

10. Conclusion

The API development environment was successfully configured using Postman and n8n. A public REST API was tested with a GET request in Postman and returned a 200 OK response. The same endpoint was integrated into an n8n HTTP Request workflow, executed successfully, and its JSON response was inspected. The workflow was also exported as an n8n JSON file for submission.

11. Remaining Submission Items

- Record the mandatory Loom or YouTube demo video.
- Upload the exported n8n workflow JSON.
- Upload this supporting PDF document.
- Upload the Postman and n8n screenshots.
- Complete the LMS submission and review all required deliverables.

Prepared as supporting documentation for the Topic 1 LMS Assessment – Setting Up Your API Development Environment.