Question 344 code

```
void reverseString(char* s, int sSize) {
    int i = 0;
    int j = sSize - 1;
    while (i <= j) {
        char temp = s[i];
        s[i] = s[j];
        s[j] = temp;
        i++;
        j--;
    }
}
```

output
case 1

Accepted Runtime: 0 ms

Case 1 Case 2

Input

s =
["h","e","l","l","o"]

Output

["o","l","l","e","h"]

Expected

["o","l","l","e","h"]

case 2

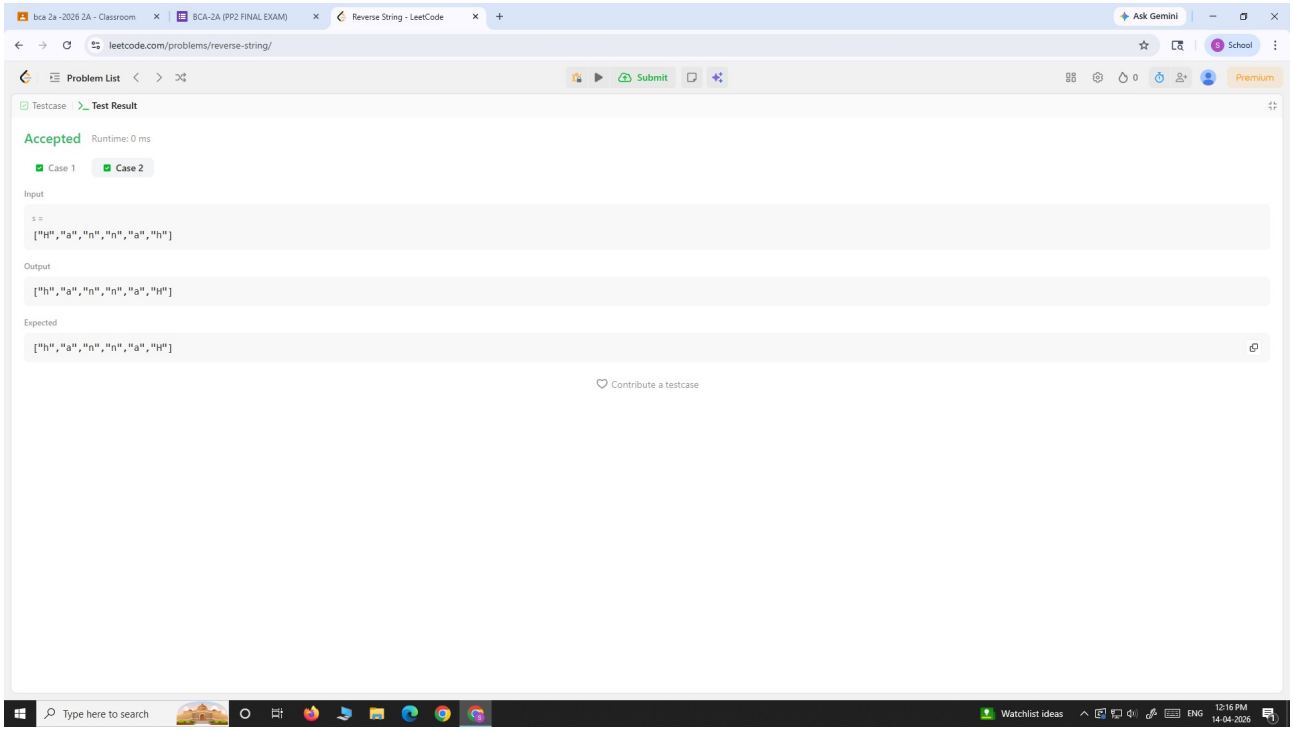
bca 2a -2026 2A - Classroom
BCA-2A (PP2 FINAL EXAM)
Reverse String - LeetCode
Ask Gemini
leetcode.com/problems/reverse-string/
School
Problem List
Submit
Premium
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
s =
["H","a","n","n","a","h"]
Output
["h","a","n","n","a","H"]
Expected
["h","a","n","n","a","H"]
Contribute a testcase
Type here to search
Watchlist ideas
ENG
12:16 PM
14-04-2026