


FEATURES SUMMARY -- 2 --



| # | Feature Name | T | P | F | S | Duration |
|---|--|---|---|---|---|--------------|
| 1 | Creation of a End to End Execution scenarios | 2 | 2 | 0 | 0 | 2 m 36.965 s |

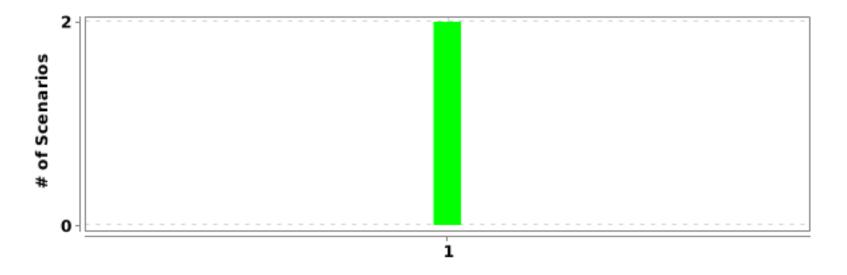


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--|--|----|----|---|---|--------------|
| 1 | Creation of a End to End Execution scenarios | user is able to run created acquire kafka pipeline and validate same in logs | 16 | 16 | 0 | 0 | 1 m 24.119 s |
| 2 | Creation of a End to End Execution scenarios | user is able to run created acquire File pipeline and validate same in logs | 16 | 16 | 0 | 0 | 1 m 12.807 s |

(F)- Creation of a End to End Execution scenarios

| PASSED | DURATION - 2 m 36.965 s | Scenarios | | Steps | |
|------------------|-------------------------|-----------|---|------------|----|
| | | Total - 2 | | Total - 32 | |
| / 1:36:23.856 PM | / // 1:39:00.821 PM / | Pass - 2 | 2 | Pass - 32 | 32 |
| | | Fail - 0 | | Fail - 0 | |
| | | Skip - 0 | | Skip - 0 | |


(S)- user is able to run created acquire kafka pipeline and validate same in logs

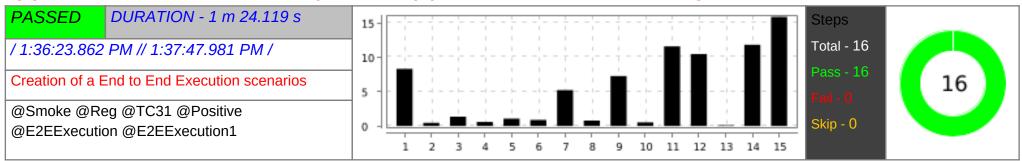

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - com.steps.Hooks.beforeScenario(io.cucumber.java.Scenario) | PASSED | 1.604 s |
| | Starting the Execution | | |
| 1 | Given user is on DIL login page | PASSED | 8.301 s |
| 2 | When enter username and password | PASSED | 0.464 s |
| 3 | And clicks on createProject tab | PASSED | 1.355 s |
| 4 | When creates project with "AutoDIL","ProjectForAutomation","Test_Pipeline" and engine | PASSED | 0.599 s |
| 5 | And creates a "PipeLIne" with "ProjectForAutomation", "Test_Pipeline", "STREAMING" | PASSED | 1.063 s |
| 6 | When enters pipeline properties | PASSED | 0.887 s |
| | PKey PValue serviceType AcquireKafka isSchemaNeededToBeRegister true area area flow flow step step | | |
| 7 | And Spark properties | PASSED | 5.233 s |
| | SKey SValue | | |

| # | Step / Hook Details | Status | Duration |
|----|---|--------|----------|
| | spark.sql.adaptive.coalescePartitions.enabled true | | |
| 8 | And clicks on "Add a Source" | PASSED | 0.796 s |
| 9 | When Enters "DemoSource","KAFKA","TMPLKafkaConnection","topic1","No_Schema","AutoManualSchemaDND","Earlier","k1", | PASSED | 7.258 s |
| 10 | "v1" and clicks on add | | |
| 10 | Then Source should get created with "DemoSource" | PASSED | 0.532 s |
| 11 | When enters "DemoDestination", "KAFKA", "TMPLKafkaConnection", "CSV", ".csv", "topic2" | PASSED | 11.592 s |
| 12 | When enters destination keys and value | PASSED | 10.462 s |
| | DKey DValue trigger 10 seconds checkpointLocation /tmp/1099/ | | |
| 13 | And clicks add | PASSED | 0.089 s |
| 14 | Then PipeLine with status "READY" is validated | PASSED | 11.809 s |
| 15 | When executes the pipeline | PASSED | 15.876 s |
| 16 | Then Pipeline record is validated on logs page | PASSED | 6.077 s |
| | AFTER - com.steps.Hooks.quitBrowser(io.cucumber.java.Scenario) | PASSED | 0.089 s |
| | Closing the Browser | | |

(S)- user is able to run created acquire File pipeline and validate same in logs

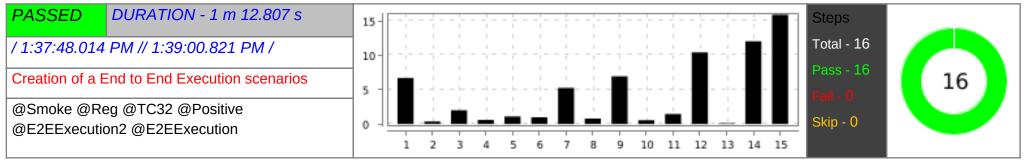

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | BEFORE - com.steps.Hooks.beforeScenario(io.cucumber.java.Scenario) | PASSED | 1.144 s |
| | Starting the Execution | | |
| 1 | Given user is on DIL login page | PASSED | 6.700 s |
| 2 | When enter username and password | PASSED | 0.359 s |
| 3 | And clicks on createProject tab | PASSED | 2.008 s |
| 4 | When creates project with "AutoDIL","ProjectForAutomation","Test_Pipeline" and engine | PASSED | 0.605 s |

| # | Step / Hook Details | Status | Duration |
|----|--|----------|----------|
| 5 | And creates a "PipeLIne" with "ProjectForAutomation","Test_Pipeline","STREAMING" | PASSED | 1.100 s |
| 6 | When enters pipeline properties | PASSED | 0.986 s |
| | PKey PValue serviceType AcquireFile isReturnable False isSchemaNeededToBeRegister False area area flow flow | | |
| | step step | | |
| 7 | And Spark properties | PASSED | 5.258 s |
| | SKey SValue spark.sql.adaptive.coalescePartitions.enabled true | | |
| 8 | And clicks on "Add a Source" | PASSED | 0.785 s |
| 9 | When Enters "DemoSource", "File System", "Auto_Kerb_DND", "CSV", "hdfs://10.0.1.92:8020/user/hdfstodeltaInput/sourceData.csv", ", ", "No Schema", " <schemavalue>"</schemavalue> | PASSED | 6.929 s |
| 10 | Then Source should get created with "DemoSource" | PASSED | 0.550 s |
| 11 | When enters "DemoDestination", "File System", "Auto_Kerb_DND", "CSV", "hdfs://10.0.1.92:8020/user/hdfsFileToFileDestination/" "topic2" | , PASSED | 1.440 s |
| 12 | When enters destination keys and value | PASSED | 10.431 s |
| | DKey DValue mode : escape : | | |
| 13 | And clicks add | PASSED | 0.097 s |
| 14 | Then PipeLine with status "READY" is validated | PASSED | 12.045 s |
| 15 | When executes the pipeline | PASSED | 15.901 s |
| 16 | Then Pipeline record is validated on logs page | PASSED | 6.370 s |
| | AFTER - com.steps.Hooks.quitBrowser(io.cucumber.java.Scenario) | PASSED | 0.085 s |
| | Closing the Browser | | |