

Cucumber Report

02-Jul-2021, 5:09:32 PM

Start : Jul 02, 5:09:32.020 PM

End : Jul 02, 5:09:32.063 PM

Duration : 0.043 s

Features




Scenarios


Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 5

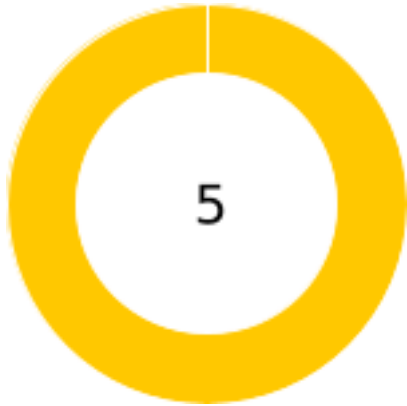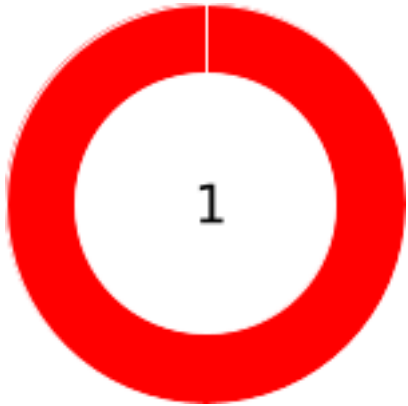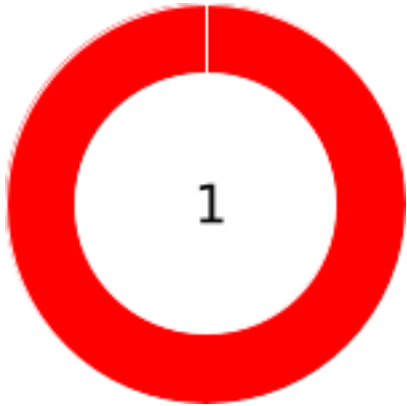

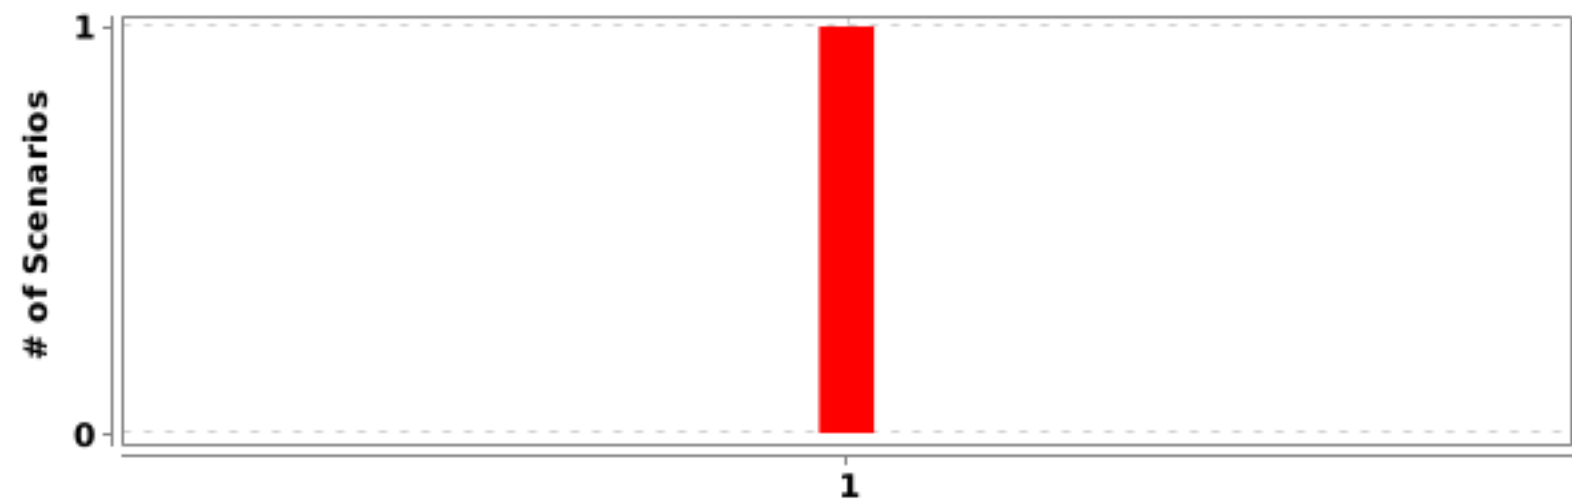

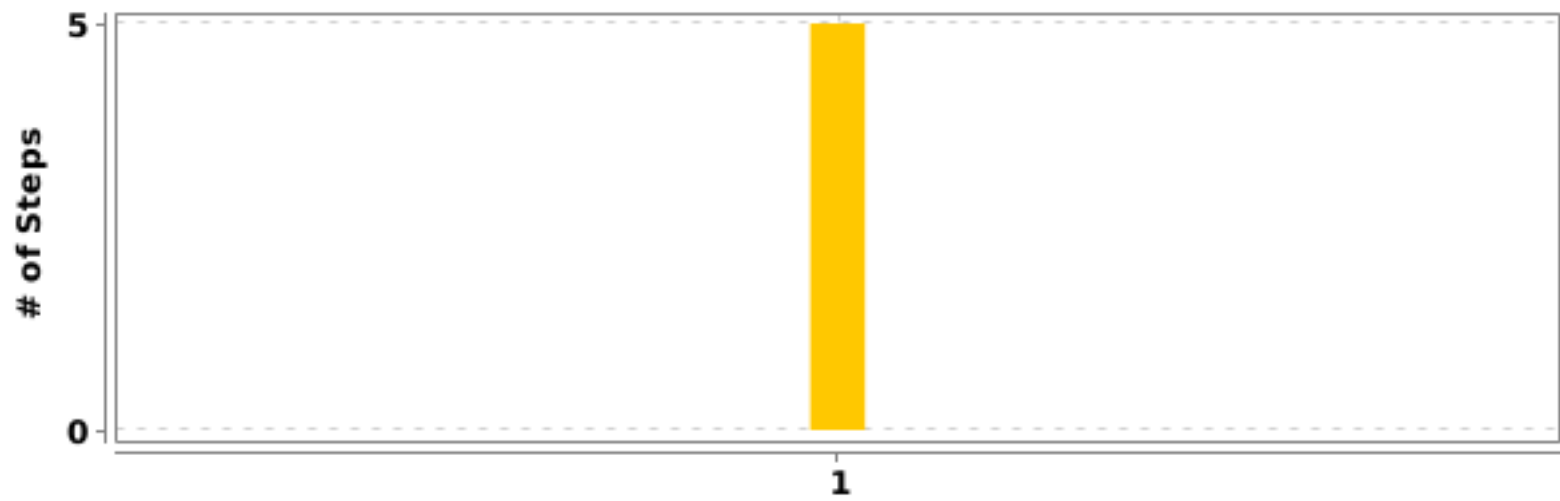

#	Feature Name	T	P	F	S	Duration
1	<u>To validate Project in backend API</u>	1	0	1	0	0.043 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>To validate Project in backend API</u>	<u>user is able to create a Project and is able to validate it in backend Api</u>	5	0	0	5	0.038 s

(F)- To validate Project in backend API

FAILED	DURATION - 0.043 s	Scenarios		Steps	
/ 5:09:32.020 PM // 5:09:32.063 PM /		Total - 1		Total - 5	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 5	

(S)- user is able to create a Project and is able to validate it in backend Api
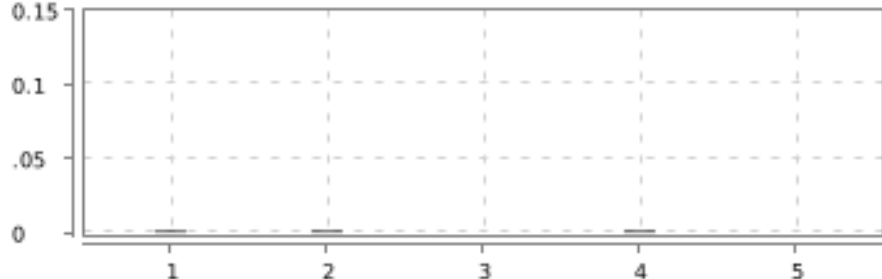
<div>FAILED</div> <div>DURATION - 0.038 s</div>			Steps		
/ 5:09:32.025 PM // 5:09:32.063 PM /			Total - 5		
To validate Project in backend API			Pass - 0		
			Fail - 0		
@Smoke @Reg @PBE-API-Test1 @Positive			Skip - 5		

#	Step / Hook Details	Status	Duration
	BEFORE - com.steps.Hooks.beforeScenario(io.cucumber.java.Scenario) java.lang.NoClassDefFoundError: org/openqa/selenium/remote/SessionNotFoundException at com.baselibrary.Baseclass.selectBrowser(Baseclass.java:49) at com.steps.Hooks.<init>(Hooks.java:24) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:47)	FAILED	0.016 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:61) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:31) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:20) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:64) at io.cucumber.core.runner.TestStep.run(TestStep.java:49) at io.cucumber.core.runner.TestCase.run(TestCase.java:47) at io.cucumber.core.runner.Runner.runPickle(Runner.java:67) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:149) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:83) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:24) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:185) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:83) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:219) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:33) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:221) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.ClassNotFoundException: org.openqa.selenium.remote.SessionNotFoundException at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521) </pre>		
1	Given user is on DIL login page	SKIPPED	0.001 s
2	When enter username and password	SKIPPED	0.001 s
3	And clicks on createProject tab	SKIPPED	0.000 s
4	When creates project with "Auto_Pro","CreatingPipeLine","Test" and engine	SKIPPED	0.001 s
5	Then user should be able to use "projectName" to validate project on "/projects"	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
	<p>AFTER - com.steps.Hooks.afterScenario(io.cucumber.java.Scenario)</p> <p>java.lang.NoClassDefFoundError: org/openqa/selenium/remote/SessionNotFoundException at com.baselibrary.Baseclass.selectBrowser(Baseclass.java:49) at com.steps.Hooks.<init>(Hooks.java:24) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:61) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:31) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:20) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:64) at io.cucumber.core.runner.TestStep.run(TestStep.java:49) at io.cucumber.core.runner.TestCase.run(TestCase.java:55) at io.cucumber.core.runner.Runner.runPickle(Runner.java:67) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:149) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:83) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:24) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:185) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:83) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:219) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:33) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:221) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.ClassNotFoundException: org.openqa.selenium.remote.SessionNotFoundException at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521) </pre>		
	<p>AFTER - com.steps.Hooks.quitBrowser(io.cucumber.java.Scenario)</p> <pre> java.lang.NoClassDefFoundError: org/openqa/selenium/remote/SessionNotFoundException at com.baselibrary.Baseclass.selectBrowser(Baseclass.java:49) at com.steps.Hooks.<init>(Hooks.java:24) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:61) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:31) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:20) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:64) at io.cucumber.core.runner.TestStep.run(TestStep.java:49) at io.cucumber.core.runner.TestCase.run(TestCase.java:55) at io.cucumber.core.runner.Runner.runPickle(Runner.java:67) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:149) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:83) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:24) </pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:185) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:83) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:219) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:33) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:221) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.ClassNotFoundException: org.openqa.selenium.remote.SessionNotFoundException at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521) </pre>		