

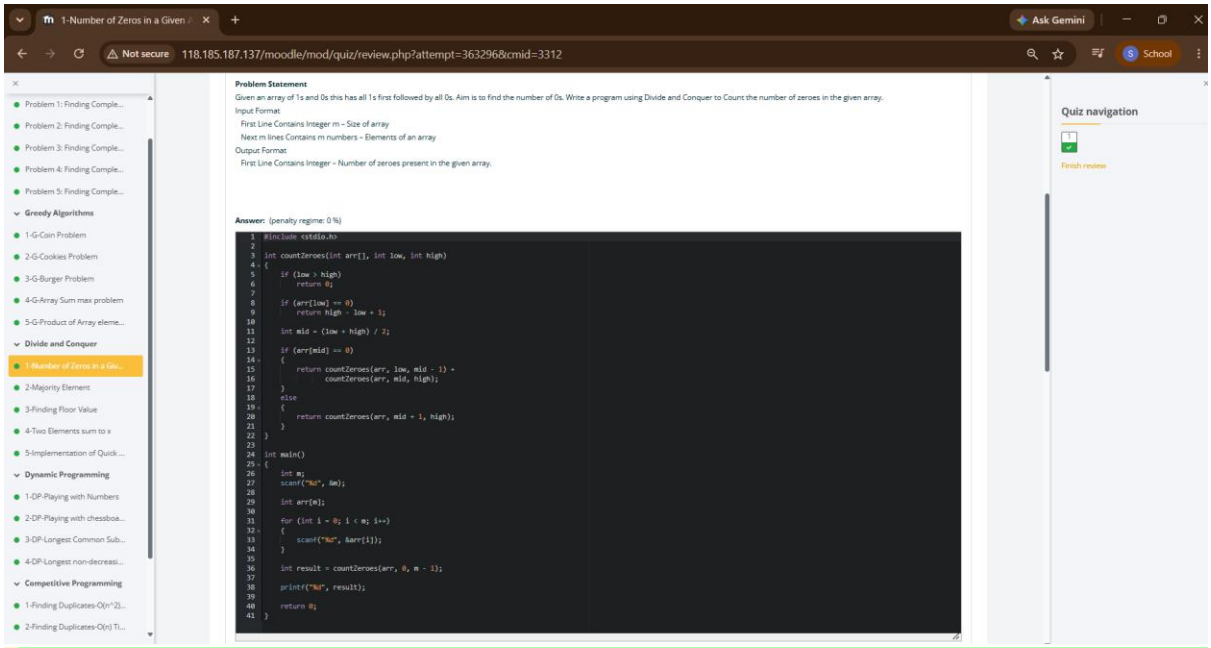


	Input	Expected	Got	
✔	5 1 1 1 0 0	2	2	✔
✔	10 1 1 1 1 1 1 1 1 1 1	0	0	✔
✔	8 0 0 0 0 0 0 0 0	8	8	✔
✔	17 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	2	2	✔

	Input	Expected	Got	
✔	5 1 1 1 0 0	2	2	✔
✔	10 1 1 1 1 1 1 1 1 1 1	0	0	✔
✔	8 0 0 0 0 0 0 0 0	8	8	✔
✔	17 1 1 1 1 1 1 1 1 1 1 1 1 1 1 0 0	2	2	✔

Passed all tests! ✔

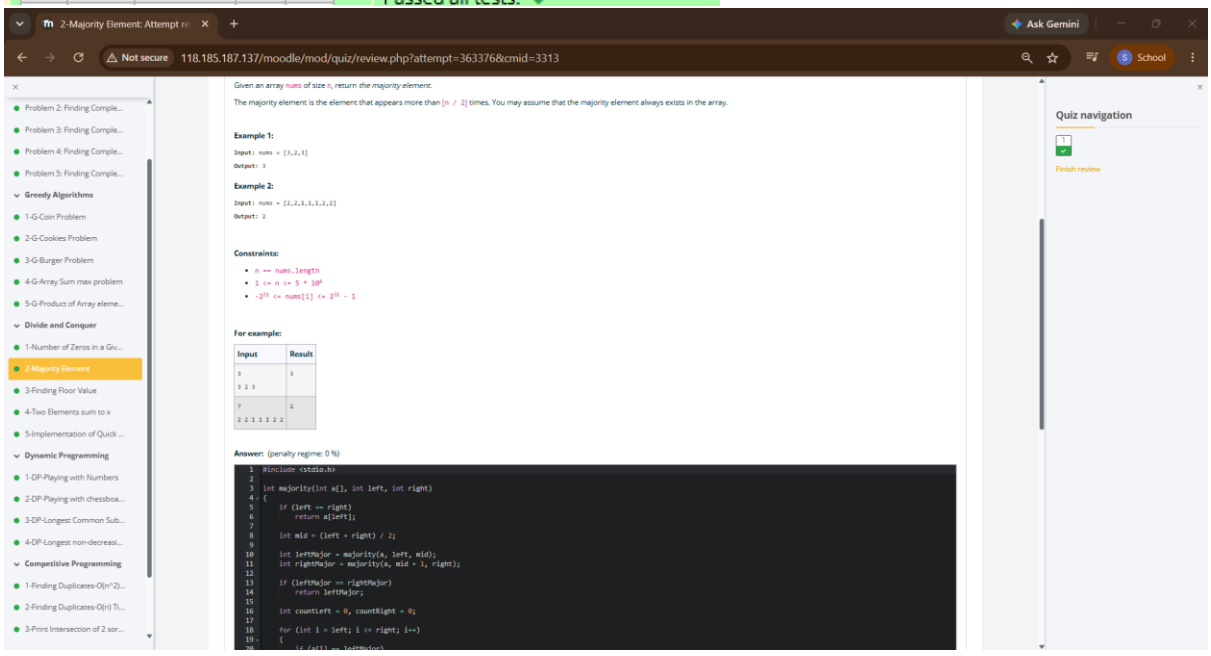

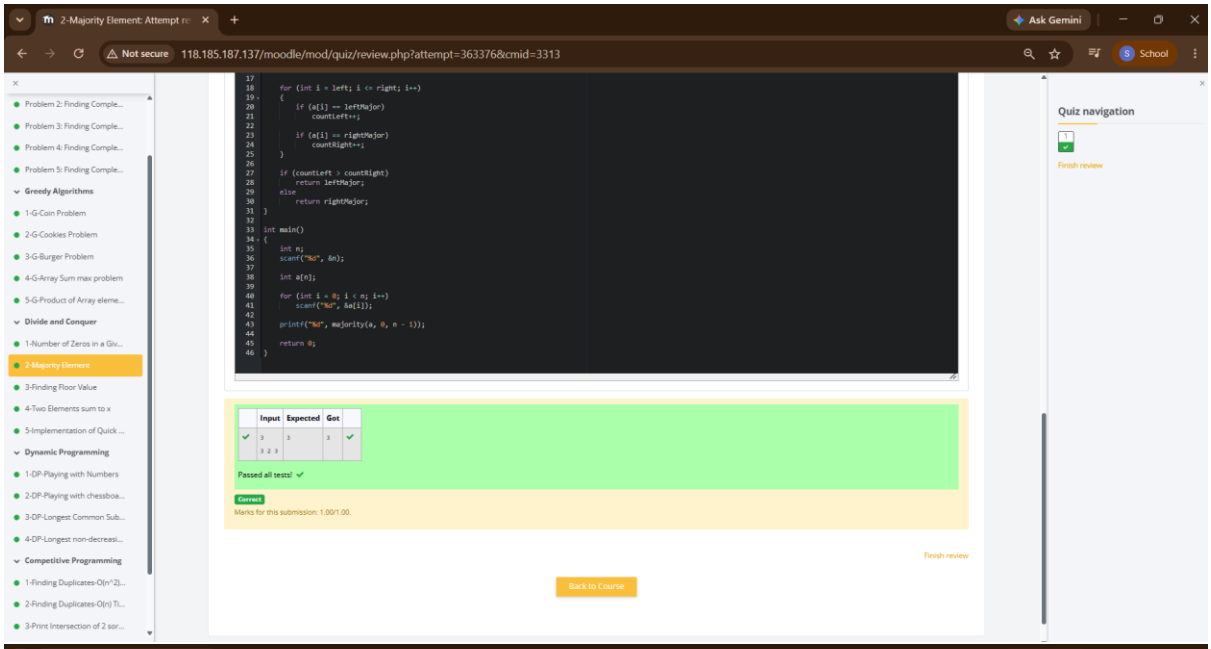

2-Majority Element: Attempt review

Not secure 118.185.187.137/moodle/mod/quiz/review.php?attempt=363376&cmid=3313

```c
for (int i = left; i <= right; i++)
{
    if (a[i] == leftMajor)
        countLeft++;

    if (a[i] == rightMajor)
        countRight++;
}

if (countLeft > countRight)
    return leftMajor;
else
    return rightMajor;
}

int main()
{
    int n;
    scanf("%d", &n);

    int a[n];

    for (int i = 0; i < n; i++)
        scanf("%d", &a[i]);

    printf("%d", majority(a, 0, n - 1));

    return 0;
}
```

	Input	Expected	Got	
✔	3 3 2 3	3	3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.


Finish review

Back to Course

Quiz navigation

1

Finish review

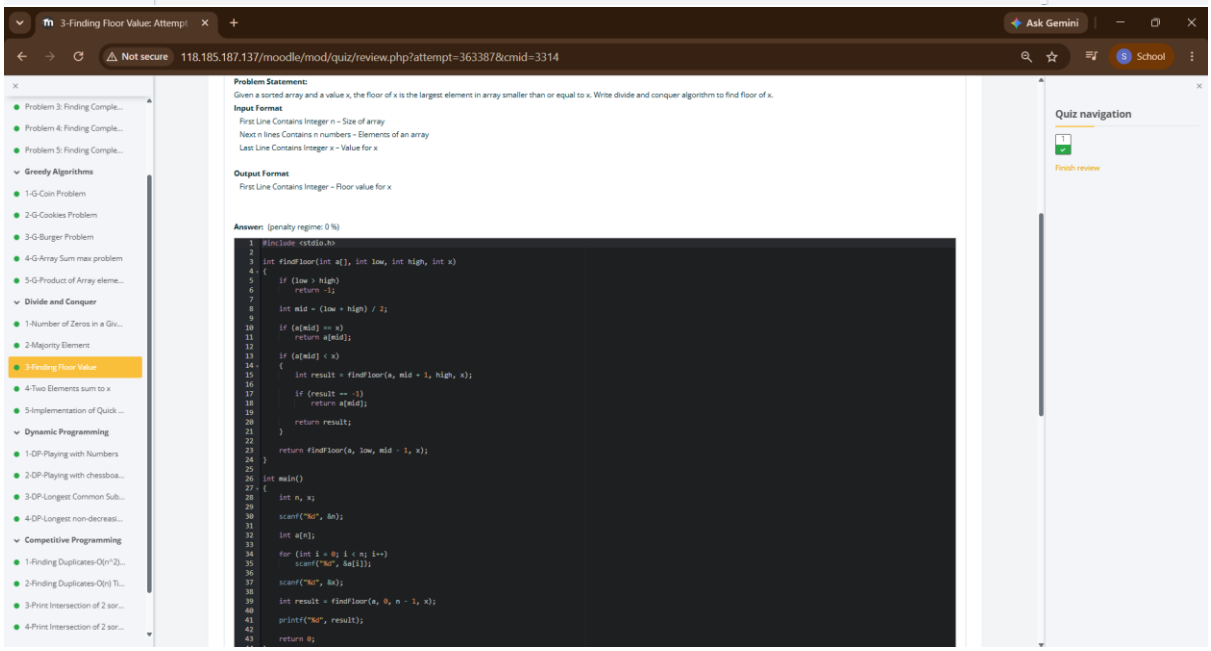

3-Finding Floor Value: Attempt review

Not secure 118.185.187.137/moodle/mod/quiz/review.php?attempt=363387&cmid=3314

Problem Statement:

Given a sorted array and a value x, the floor of x is the largest element in array smaller than or equal to x. Write divide and conquer algorithm to find floor of x.

Input Format

First Line Contains Integer n – Size of array

Next n lines Contains n numbers – Elements of an array

Last Line Contains Integer x – Value for x

Output Format

First Line Contains Integer – Floor value for x

Answer: (penalty regime: 0 %)

```c
#include <stdio.h>

int findFloor(int a[], int low, int high, int x)
{
    if (low > high)
        return -1;

    int mid = (low + high) / 2;

    if (a[mid] == x)
        return a[mid];

    if (a[mid] < x)
    {
        int result = findFloor(a, mid + 1, high, x);

        if (result == -1)
            return a[mid];

        return result;
    }

    return findFloor(a, low, mid - 1, x);
}

int main()
{
    int n, x;

    scanf("%d", &n);

    int a[n];

    for (int i = 0; i < n; i++)
        scanf("%d", &a[i]);

    scanf("%d", &x);

    int result = findFloor(a, 0, n - 1, x);

    printf("%d", result);

    return 0;
}
```

Quiz navigation

1


Finish review


	Input	Expected	Got	
✔	6 1 2 8 10 12 19 5	2	2	✔
✔	5 10 22 85 108 129 100	85	85	✔
✔	7 3 5 7 9 11 13 15 10	9	9	✔


Passed all tests! ✔


Correct

Marks for this submission: 1.00/1.00.

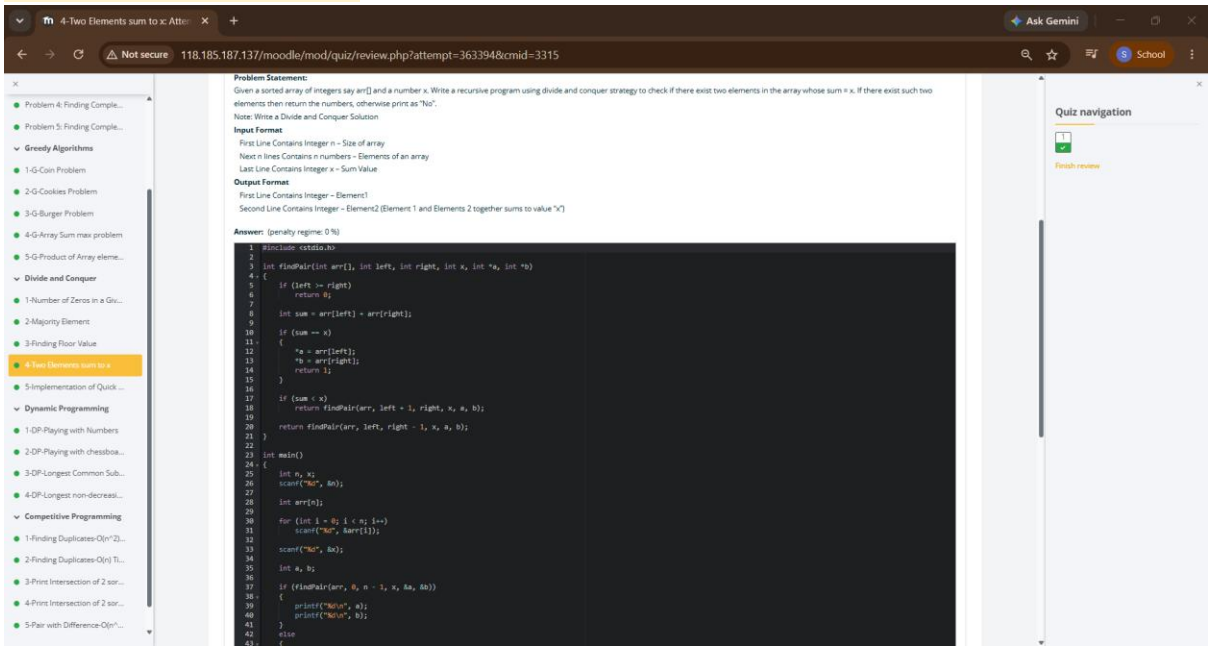

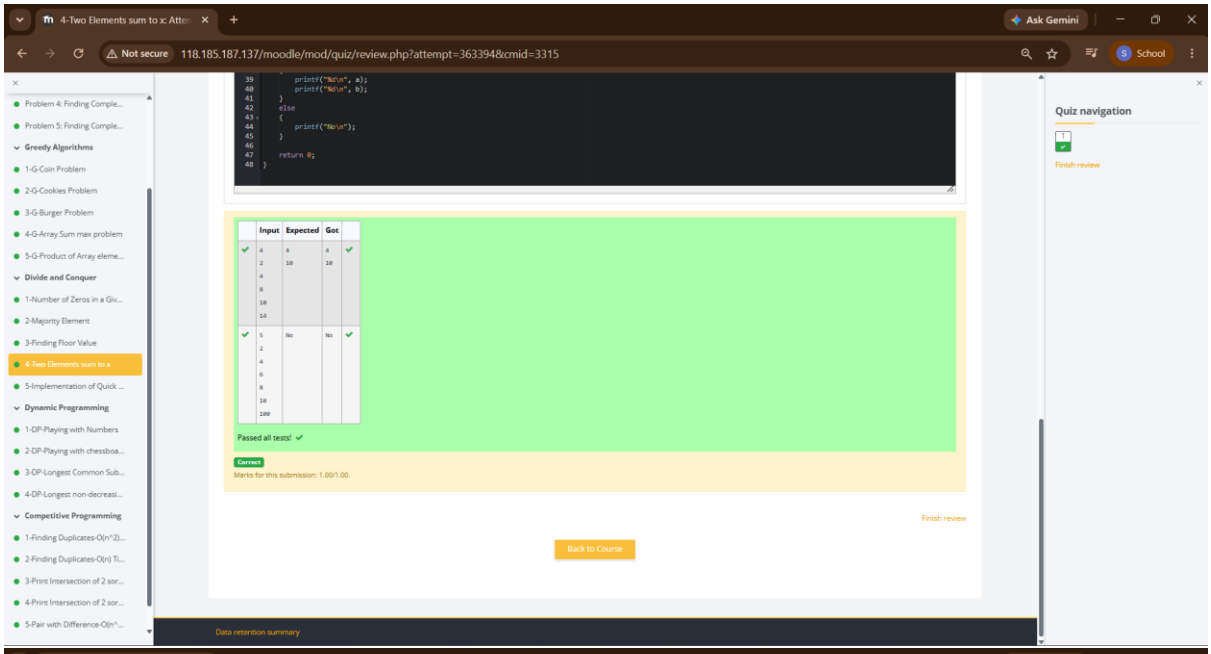
4-Two Elements sum to x: Atte
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=363394&cmid=3315
Ask Gemini
School
Problem 4: Finding Comple...
Problem 5: Finding Comple...
Greedy Algorithms
1-G-Coin Problem
2-G-Cookies Problem
3-G-Burger Problem
4-G-Array Sum max problem
5-G-Product of Array eleme...
Divide and Conquer
1-Number of Zeros in a Giv...
2-Majority Element
3-Finding Floor Value
4-Two Elements sum to x
5-Implementation of Quick ...
Dynamic Programming
1-DP-Playing with Numbers
2-DP-Playing with chessboa...
3-DP-Longest Common Sub...
4-DP-Longest non-decreasi...
Competitive Programming
1-Finding Duplicates-O(n^2)...
2-Finding Duplicates-O(n) Ti...
3-Print Intersection of 2 sor...
4-Print Intersection of 2 sor...
5-Pair with Difference-O(n^...
Input
Expected
Got
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Finish review
Back to Course
Data retention summary
Quiz navigation
Finish review

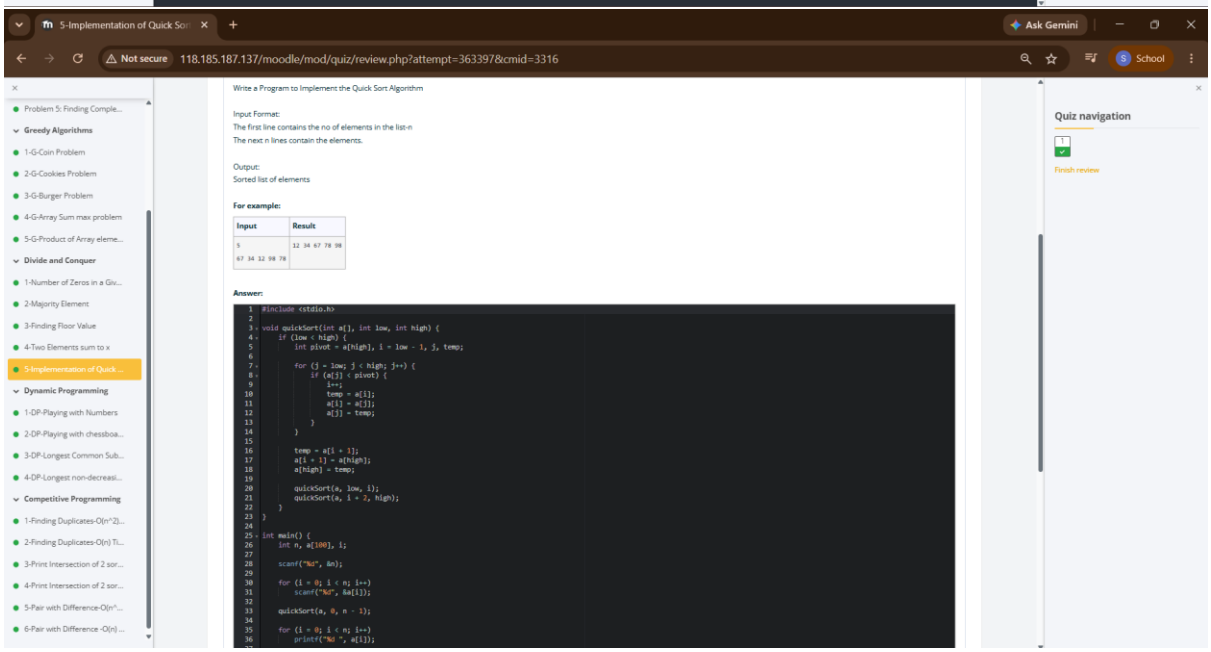
5-Implementation of Quick Sor
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=363397&cmid=3316
Ask Gemini
School
Write a Program to Implement the Quick Sort Algorithm
Input Format:
The first line contains the no of elements in the list-n
The next n lines contain the elements.
Output:
Sorted list of elements
For example:
Input
Result
5
67 34 32 98 78
12 34 67 78 98
Answer:
Quiz navigation
Finish review

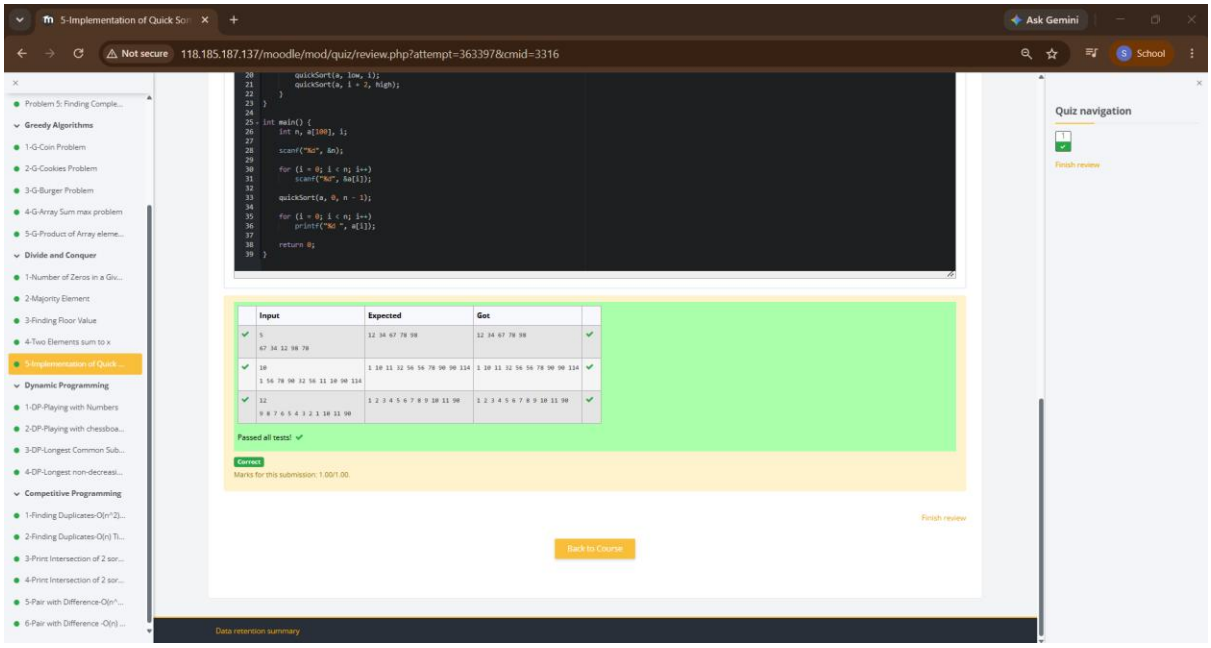
5-Implementation of Quick Sor
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=363397&cmid=3316
School
quickSort(a, low, i);
quickSort(a, i + 2, high);
}
}
int main() {
int n, a[100], i;
scanf("%d", &n);
for (i = 0; i < n; i++)
scanf("%d", &a[i]);
quickSort(a, 0, n - 1);
for (i = 0; i < n; i++)
printf("%d ", a[i]);
return 0;
}
Input
Expected
Got
5
67 34 12 98 78
12 34 67 78 98
12 34 67 78 98
10
1 56 78 90 32 56 11 10 90 114
1 10 11 32 56 56 78 90 90 114
1 10 11 32 56 56 78 90 90 114
12
9 8 7 6 5 4 3 2 1 10 11 90
1 2 3 4 5 6 7 8 9 10 11 90
1 2 3 4 5 6 7 8 9 10 11 90
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Finish review
Back to Course
Quiz navigation
Finish review
Problem 5: Finding Comple...
Greedy Algorithms
1-G-Coin Problem
2-G-Cookies Problem
3-G-Burger Problem
4-G-Array Sum max problem
5-G-Product of Array eleme...
Divide and Conquer
1-Number of Zeros in a Giv...
2-Majority Element
3-Finding Floor Value
4-Two Elements sum to x
5-Implementation of Quick ...
Dynamic Programming
1-DP-Playing with Numbers
2-DP-Playing with chessboa...
3-DP-Longest Common Sub...
4-DP-Longest non-decreasi...
Competitive Programming
1-Finding Duplicates-O(n^2)...
2-Finding Duplicates-O(n) Ti...
3-Print Intersection of 2 sor...
4-Print Intersection of 2 sor...
5-Pair with Difference-O(n^...
6-Pair with Difference -O(n) ...
Data retention summary