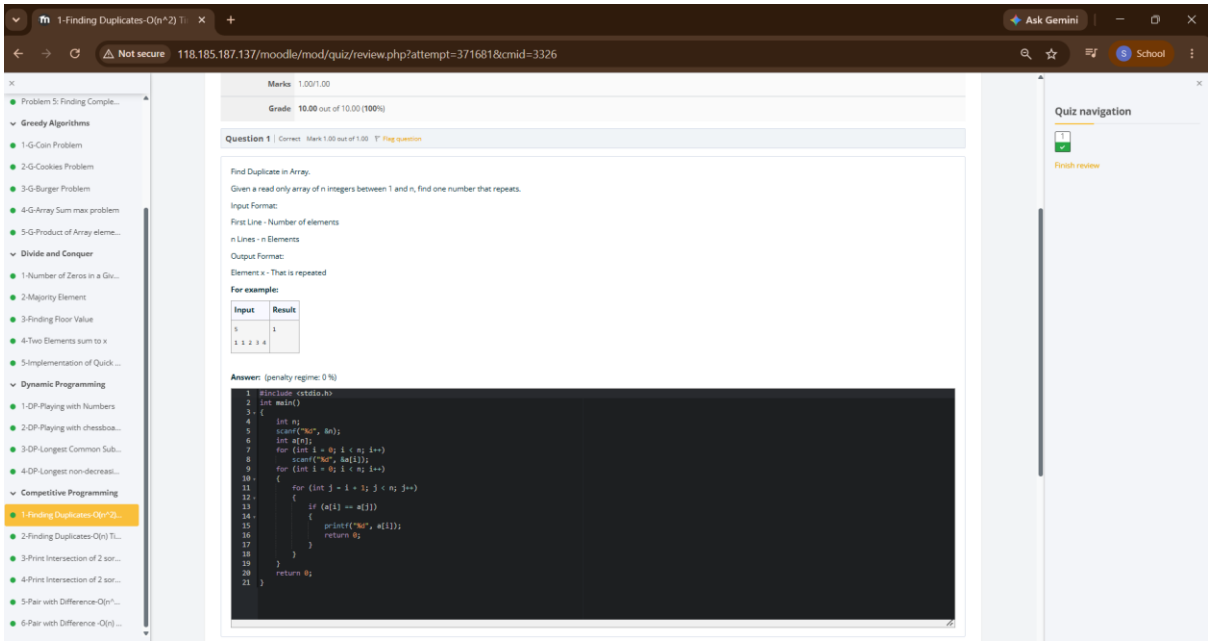
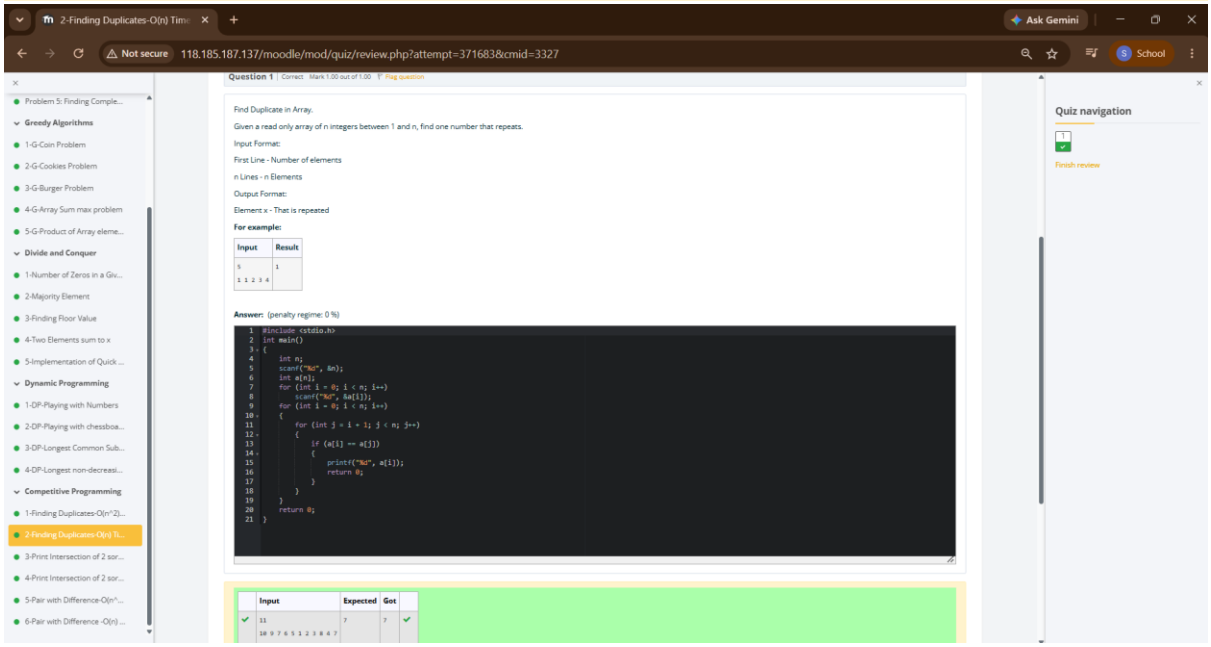


	Input	Expected	Got	
✔	11 10 9 7 6 5 1 2 3 8 4 7	7	7	✔
✔	5 1 2 3 4 4	4	4	✔
✔	5 1 1 2 3 4	1	1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

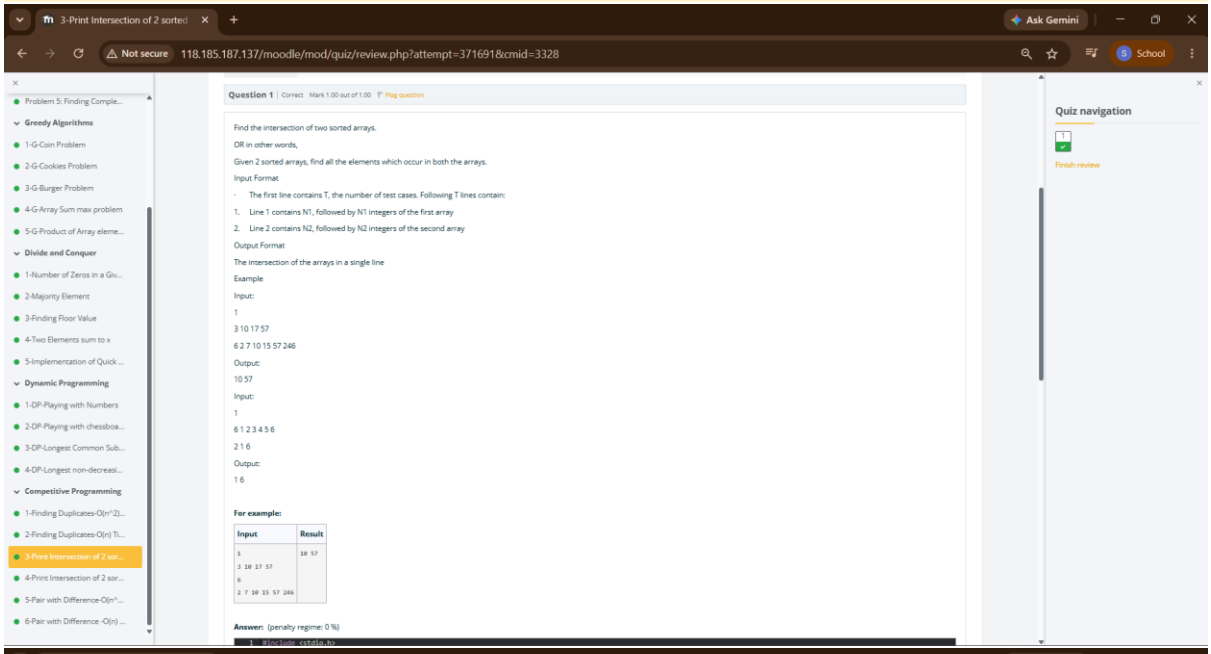


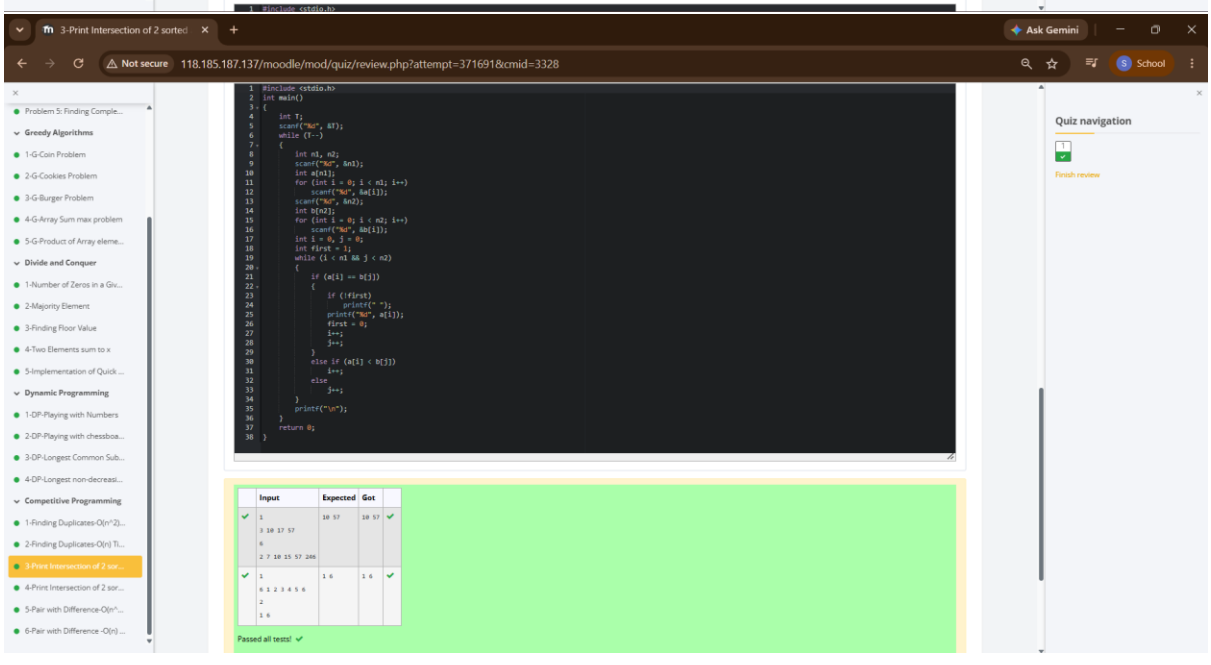
	Input	Expected	Got	
✔	11 10 9 7 6 5 1 2 3 8 4 7	7	7	✔
✔	5 1 2 3 4 4	4	4	✔
✔	5 1 1 2 3 4	1	1	✔

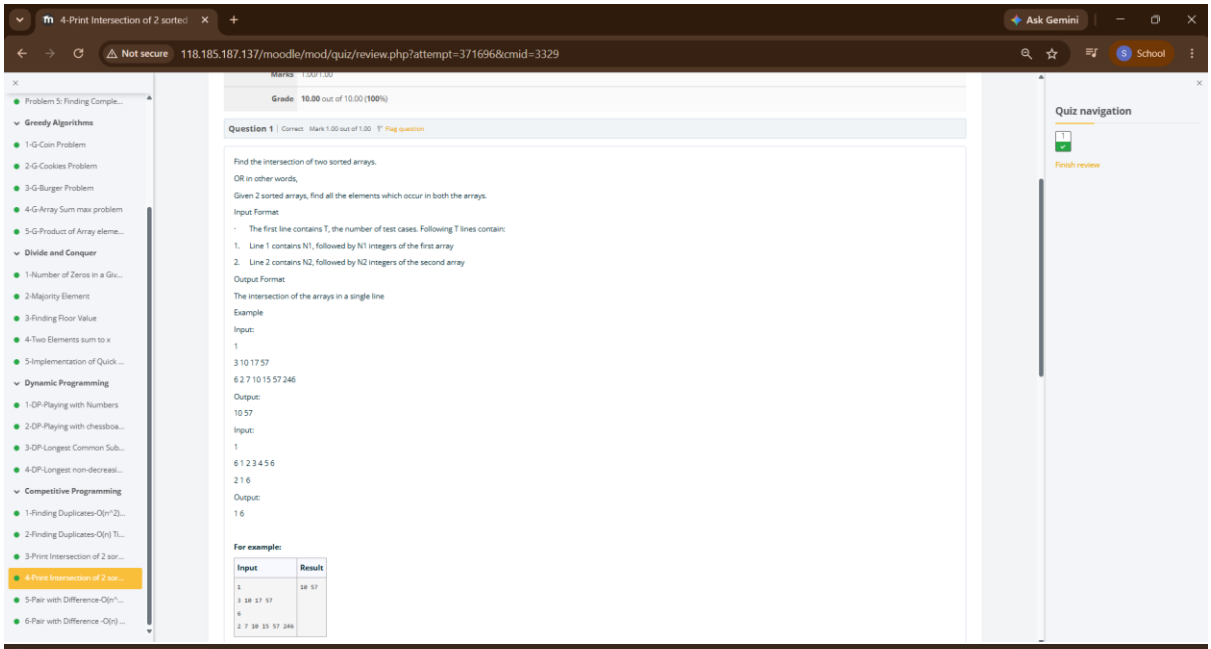
Passed all tests! ✔

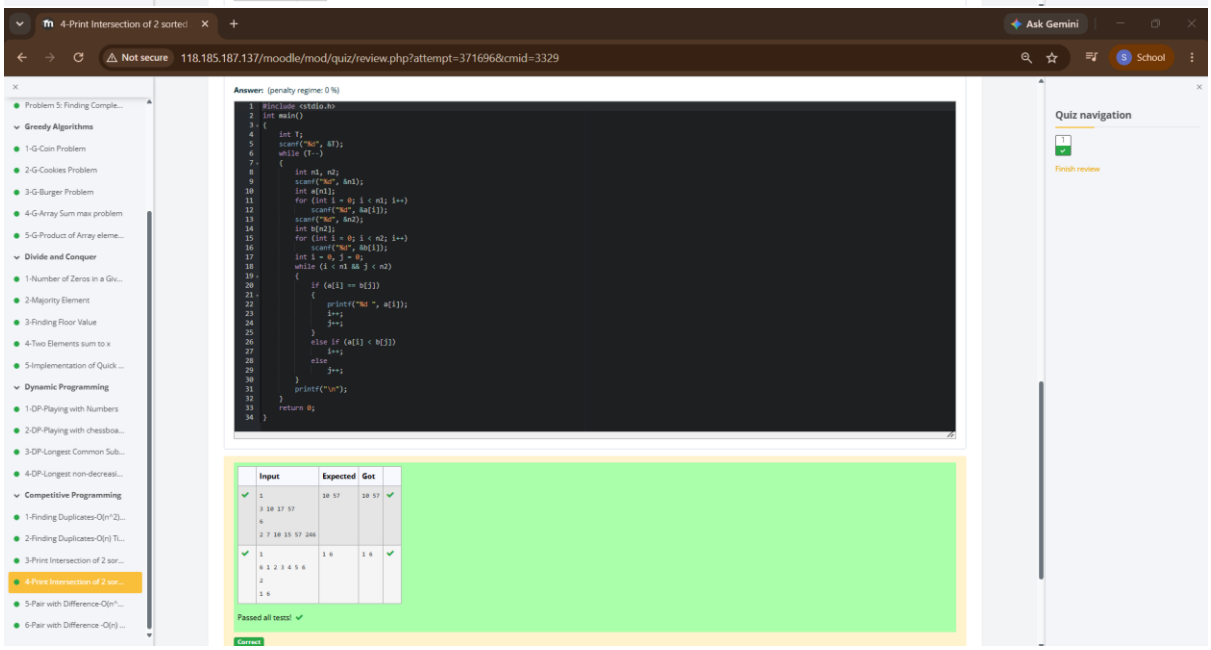
Correct

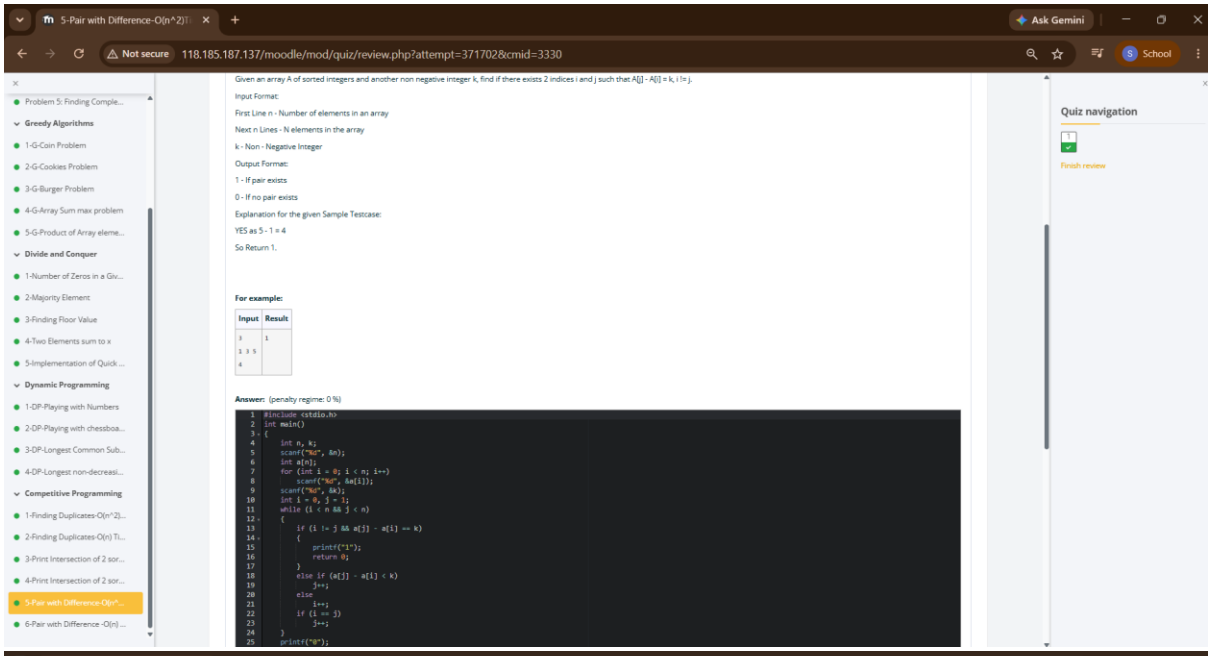
Marks for this submission: 1.00/1.00.

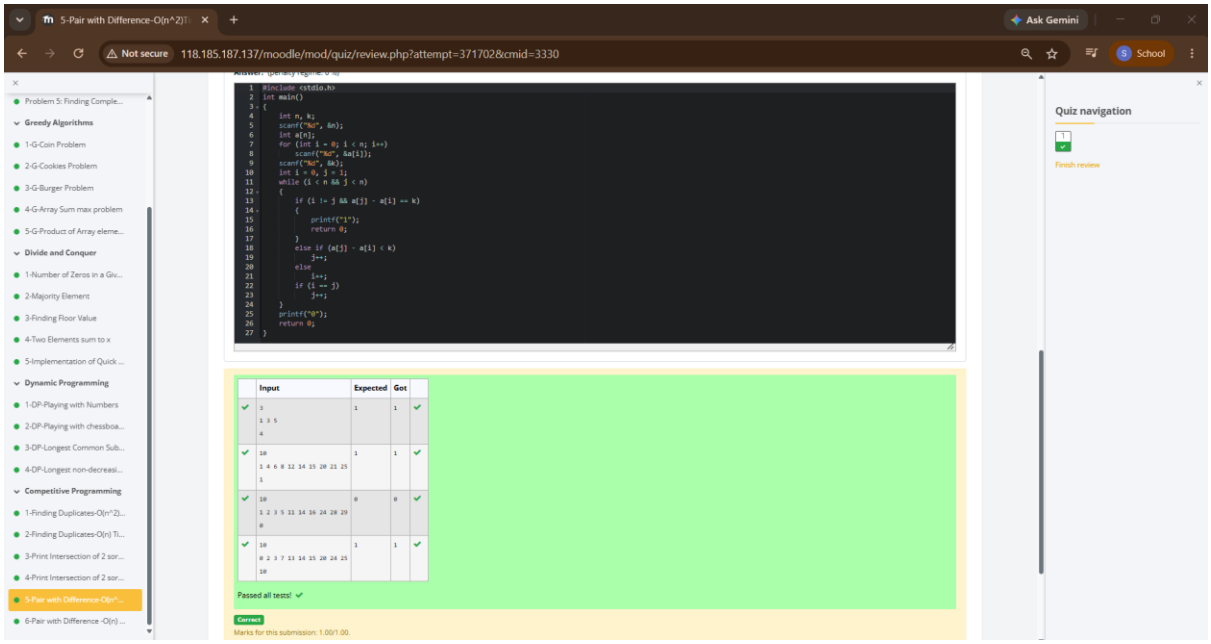


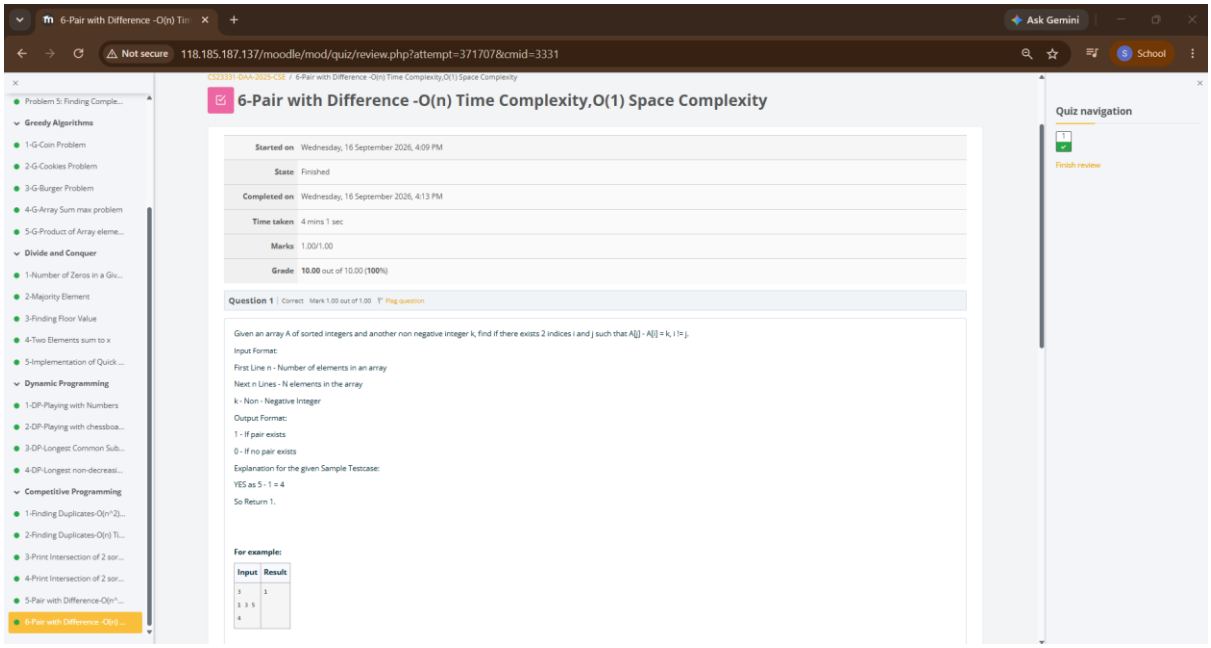


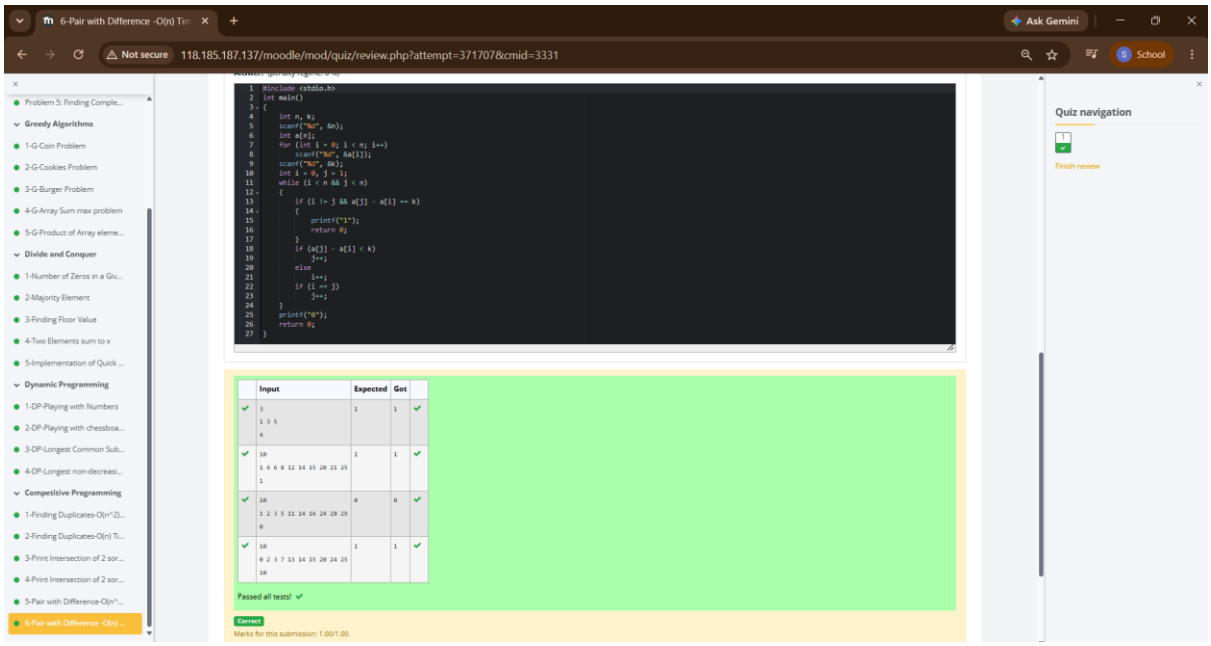

4-Print Intersection of 2 sorted
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=371696&cmid=3329
School
Problem 5: Finding Comple...
Greedy Algorithms
1-G-Coin Problem
2-G-Cookies Problem
3-G-Burger Problem
4-G-Array Sum max problem
5-G-Product of Array eleme...
Divide and Conquer
1-Number of Zeros in a Giv...
2-Majority Element
3-Finding Floor Value
4-Two Elements sum to x
5-Implementation of Quick ...
Dynamic Programming
1-DP-Playing with Numbers
2-DP-Playing with chessboa...
3-DP-Longest Common Sub...
4-DP-Longest non-decreasi...
Competitive Programming
1-Finding Duplicates-O(n^2)...
2-Finding Duplicates-O(n) Ti...
3-Print Intersection of 2 sor...
4-Print Intersection of 2 sor...
5-Pair with Difference-O(n^...
6-Pair with Difference -O(n) ...
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1 | Correct Mark 1.00 out of 1.00 Flag question
Find the intersection of two sorted arrays.
OR in other words,
Given 2 sorted arrays, find all the elements which occur in both the arrays.
Input Format
The first line contains T, the number of test cases. Following T lines contain:
1. Line 1 contains N1, followed by N1 integers of the first array
2. Line 2 contains N2, followed by N2 integers of the second array
Output Format
The intersection of the arrays in a single line
Example
Input:
1
3 10 17 57
6 2 7 10 15 57 246
Output:
10 57
Input:
1
6 1 2 3 4 5 6
2 1 6
Output:
1 6
For example:
Input
Result
1
3 10 17 57
6
2 7 10 15 57 246
10 57
Quiz navigation
1
Finish review


4-Print Intersection of 2 sorted
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=371696&cmid=3329
School
Problem 5: Finding Comple...
Greedy Algorithms
1-G-Coin Problem
2-G-Cookies Problem
3-G-Burger Problem
4-G-Array Sum max problem
5-G-Product of Array eleme...
Divide and Conquer
1-Number of Zeros in a Giv...
2-Majority Element
3-Finding Floor Value
4-Two Elements sum to x
5-Implementation of Quick ...
Dynamic Programming
1-DP-Playing with Numbers
2-DP-Playing with chessboa...
3-DP-Longest Common Sub...
4-DP-Longest non-decreasi...
Competitive Programming
1-Finding Duplicates-O(n^2)...
2-Finding Duplicates-O(n) Ti...
3-Print Intersection of 2 sor...
4-Print Intersection of 2 sor...
5-Pair with Difference-O(n^...
6-Pair with Difference -O(n) ...
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main()
{
int T;
scanf("%d", &T);
while (T--)
{
int n1, n2;
scanf("%d", &n1);
int a[n1];
for (int i = 0; i < n1; i++)
scanf("%d", &a[i]);
scanf("%d", &n2);
int b[n2];
for (int i = 0; i < n2; i++)
scanf("%d", &b[i]);
int i = 0, j = 0;
while (i < n1 && j < n2)
{
if (a[i] == b[j])
{
printf("%d ", a[i]);
i++;
j++;
}
else if (a[i] < b[j])
i++;
else
j++;
}
printf("\n");
}
return 0;
}
Input
Expected
Got
1
3 10 17 57
6
2 7 10 15 57 246
10 57
10 57
1
6 1 2 3 4 5 6
2
1 6
1 6
1 6
Passed all tests!
Correct
Quiz navigation
1
Finish review


5-Pair with Difference-O(n^2)
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=371702&cmid=3330
School
Given an array A of sorted integers and another non negative integer k, find if there exists 2 indices i and j such that A[j] - A[i] = k, i != j.
Input Format:
First Line n - Number of elements in an array
Next n Lines - N elements in the array
k - Non - Negative Integer
Output Format:
1 - If pair exists
0 - If no pair exists
Explanation for the given Sample Testcase:
YES as 5 - 1 = 4
So Return 1.
For example:
Input
Result
3
1 3 5
4
1
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main()
{
int n, k;
scanf("%d", &n);
int a[n];
for (int i = 0; i < n; i++)
scanf("%d", &a[i]);
scanf("%d", &k);
int i = 0, j = 1;
while (i < n && j < n)
{
if (i != j && a[j] - a[i] == k)
{
printf("1");
return 0;
}
else if (a[j] - a[i] < k)
j++;
else
i++;
if (i == j)
j++;
}
printf("0");
Quiz navigation
Finish review
Problem 5: Finding Comple...
Greedy Algorithms
1-G-Coin Problem
2-G-Cookies Problem
3-G-Burger Problem
4-G-Array Sum max problem
5-G-Product of Array eleme...
Divide and Conquer
1-Number of Zeros in a Giv...
2-Majority Element
3-Finding Floor Value
4-Two Elements sum to x
5-Implementation of Quick ...
Dynamic Programming
1-DP-Playing with Numbers
2-DP-Playing with chessboa...
3-DP-Longest Common Sub...
4-DP-Longest non-decreasi...
Competitive Programming
1-Finding Duplicates-O(n^2)...
2-Finding Duplicates-O(n) Ti...
3-Print Intersection of 2 sor...
4-Print Intersection of 2 sor...
5-Pair with Difference-O(n^...
6-Pair with Difference -O(n) ...


5-Pair with Difference-O(n^2)
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=371702&cmid=3330
School
#include <stdio.h>
int main()
{
int n, k;
scanf("%d", &n);
int a[n];
for (int i = 0; i < n; i++)
scanf("%d", &a[i]);
scanf("%d", &k);
int i = 0, j = 1;
while (i < n && j < n)
{
if (i != j && a[j] - a[i] == k)
{
printf("1");
return 0;
}
else if (a[j] - a[i] < k)
j++;
else
i++;
if (i == j)
j++;
}
printf("0");
return 0;
}
Input
Expected
Got
1
1 3 5
4
1
1
10
1 4 6 8 12 14 15 20 21 25
1
1
1
10
1 2 3 5 11 14 16 24 28 29
0
0
0
10
0 2 3 7 13 14 15 20 24 25
10
1
1
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Quiz navigation
Finish review
Problem 5: Finding Comple...
Greedy Algorithms
1-G-Coin Problem
2-G-Cookies Problem
3-G-Burger Problem
4-G-Array Sum max problem
5-G-Product of Array eleme...
Divide and Conquer
1-Number of Zeros in a Giv...
2-Majority Element
3-Finding Floor Value
4-Two Elements sum to x
5-Implementation of Quick ...
Dynamic Programming
1-DP-Playing with Numbers
2-DP-Playing with chessboa...
3-DP-Longest Common Sub...
4-DP-Longest non-decreasi...
Competitive Programming
1-Finding Duplicates-O(n^2)...
2-Finding Duplicates-O(n) Ti...
3-Print Intersection of 2 sor...
4-Print Intersection of 2 sor...
5-Pair with Difference-O(n^...
6-Pair with Difference -O(n) ...


6-Pair with Difference -O(n) Tim
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=371707&cmid=3331
School
CS23331-DAA-2025-CSE / 6-Pair with Difference -O(n) Time Complexity,O(1) Space Complexity
6-Pair with Difference -O(n) Time Complexity,O(1) Space Complexity
Started on Wednesday, 16 September 2026, 4:09 PM
State Finished
Completed on Wednesday, 16 September 2026, 4:13 PM
Time taken 4 mins 1 sec
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1 | Correct | Mark 1.00 out of 1.00 | Flag question
Given an array A of sorted integers and another non negative integer k, find if there exists 2 indices i and j such that A[j] - A[i] = k, i != j.
Input Format:
First Line n - Number of elements in an array
Next n Lines - N elements in the array
k - Non - Negative Integer
Output Format:
1 - If pair exists
0 - If no pair exists
Explanation for the given Sample Testcase:
YES as 5 - 1 = 4
So Return 1.
For example:
Input
Result
3
1 3 5
4
1
Quiz navigation
Finish review


6-Pair with Difference -O(n) Tim
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=371707&cmid=3331
School
#include <stdio.h>
int main()
{
int n, k;
scanf("%d", &n);
int a[n];
for (int i = 0; i < n; i++)
scanf("%d", &a[i]);
scanf("%d", &k);
int i = 0, j = 1;
while (i < n && j < n)
{
if (i != j && a[j] - a[i] == k)
{
printf("1");
return 0;
}
if (a[j] - a[i] < k)
j++;
else
i++;
if (i == j)
j++;
}
printf("0");
return 0;
}
Input
Expected
Got
3
1 3 5
4
1
1
10
1 4 6 8 12 14 15 20 21 25
1
1
1
10
1 2 3 5 11 14 16 24 28 29
0
0
0
10
0 2 3 7 13 14 15 20 24 25
10
1
1
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Quiz navigation
Finish review