

Lab 4: Programming Symmetric & Asymmetric Cryptography

1. Objectives

- Build a single program that performs symmetric and asymmetric cryptographic operations from code (not only via OpenSSL).
- Implement AES-128/256 in ECB and CFB modes; RSA encryption/decryption; RSA signature and verification; and SHA-256 hashing, all via a menu-based CLI.
- Generate keys on first use, store them in files, and reuse them for subsequent operations.
- Store outputs (ciphertexts, signatures) in files; decrypt/verify using those files and display success to the console.
- Measure execution time per operation for multiple key sizes; tabulate/plot results and discuss observations.

2. Environment & Tools

Hardware/OS: macOS on Apple Silicon (MacBook Air M1)

Language: Python 3.10.8 (venv)

Libraries: PyCryptodome (for AES, RSA, SHA-256, signatures)

Editor/CLI: VS Code + Terminal (zsh)

3. Program Design

3.1 Overview

The program is a single CLI application (main.py) exposing a numbered menu:

1. AES encrypt (ECB/CFB, 128/256)
2. AES decrypt
3. RSA generate keypair
4. RSA encrypt
5. RSA decrypt
6. RSA sign
7. RSA verify
8. SHA-256 of file

9. Quit

Supporting routines live in **crypto_utils.py**.

3.2 Key & Artifact Management (File-Based)

→ Keys (files in keys/):

- ◆ AES-128 key: aes128.key (hex)
- ◆ AES-256 key: aes256.key (hex)
- ◆ IV for CFB: iv.hex (16 bytes, hex)
- ◆ RSA keys: rsa_priv.pem (private), rsa_pub.pem (public)
Keys are generated at first use, saved to files, and then read for subsequent operations.

→ Artifacts (files in out/):

- ◆ AES ciphertexts: *.ecb.enc, *.cfb.enc
- ◆ AES decrypted files: *.ecb.dec, *.cfb.dec
- ◆ RSA ciphertexts: *.rsa.enc
- ◆ RSA decrypted files: *.rsa.dec
- ◆ Signatures: *.sig

3.3 Algorithms & Modes

- **AES:** ECB (block mode; padded) and CFB (stream-like; IV required), with 128- and 256-bit keys.
- **RSA:** Key sizes selected at runtime (e.g., 2048/3072/4096). Encryption uses RSA-OAEP with SHA-256 for modern padding semantics; decryption mirrors OAEP.
- **Signatures:** RSA PKCS#1 v1.5 over SHA-256 (sign/verify a file).
- **Hashing:** SHA-256 hex digest of any file.
- **Timing:** Each operation prints elapsed seconds using a high-resolution timer; results are collected for analysis and plotting, as required.

4. Implementation Details

4.1 AES (ECB & CFB; 128/256-bit)

→ **Algorithms & modes:** AES-128 and AES-256 in two modes:

- ◆ **ECB** (Electronic Codebook): requires PKCS#7 padding to a 16-byte block size.
- ◆ **CFB** (Cipher Feedback): stream-like, uses an IV; no block padding required.

→ **Key/IV handling:**

- ◆ Keys and IV are stored in files as hex; created on demand if missing.

→ **File I/O:**

- ◆ **Encrypt:** reads plaintext file → writes ciphertext to out/...enc.
- ◆ **Decrypt:** reads ciphertext file → writes recovered plaintext to out/...dec.

4.2 RSA (encryption/decryption)

- **Key generation:** configurable bit-lengths (e.g., 2048/3072/4096). Keys are saved as PEM files in keys/.
- **Padding:** RSA-OAEP with SHA-256 for encryption/decryption.
- **Note:** Direct RSA is size-limited; for large files, a hybrid scheme is recommended.

4.3 RSA digital signatures

- **Scheme:** RSA PKCS#1 v1.5 over SHA-256.
- **Workflow:**
 - ◆ **Sign:** compute SHA-256 over file → sign with private key → write *.sig.
 - ◆ **Verify:** verify signature with public key; console prints "Verified OK" if valid.

4.4 SHA-256 hashing

- Computes and prints the hex digest of a file's contents (no file output).

4.5 Timing (built-in + batch)

- The CLI prints per-operation wall-time using a high-resolution timer.

5. Usage Demonstration

Create two small test files:

```
echo "Hello I am Shakera Jannat Ema." > msg.txt
```

```
echo "I am doing it for my lab task." > msg2.txt
```

Run the program: `python main.py`

AES-128-ECB

- Choose: 1 (encrypt) → file msg.txt → mode ECB → bits 128 → output out/msg.txt.ecb.enc
- Choose: 2 (decrypt) → file out/msg.txt.ecb.enc → mode ECB → bits 128 → output out/msg.txt.ecb.dec
- Verify: `diff msg.txt out/msg.txt.ecb.dec` (no output means files match)

AES-256-CFB

- Encrypt msg2.txt with mode CFB and bits 256 → out/msg2.txt.cfb.enc
- Decrypt back → out/msg2.txt.cfb.dec
- Verify: `diff msg2.txt out/msg2.txt.cfb.dec`

RSA (2048-bit example)

- Generate keys: menu 3 → bits 2048 → keys/rsa_priv.pem, keys/rsa_pub.pem
- Encrypt: menu 4 → file msg.txt → out/msg.txt.rsa.enc
- Decrypt: menu 5 → out/msg.txt.rsa.dec
- Verify: `diff msg.txt out/msg.txt.rsa.dec`

RSA signature

- Sign: menu 6 → file msg.txt → out/msg.txt.sig
- Verify: menu 7 → file msg.txt + signature out/msg.txt.sig → "Verified OK"

Hash

- SHA-256: menu 8 → file msg.txt → digest printed to console.

6. Experimental Method: Execution Time

6.1 Protocol

- For each operation, run **N=5 trials** and record the average wall-time (`time.perf_counter()`).
- **AES tests:** ECB and CFB, keys 128 and 256 bits; run on a sufficiently large file (approximately 1 MB) to see consistent timing.
- **RSA tests:** Key sizes 1024, 2048, 3072, 4096 bits; measure key generation (optional), encrypt, decrypt on a small plaintext.
- Save results to CSV

7. Results & Discussion

From Terminal :

```
1. (.venv) shakera@Shakera-MacBook-Air-291 lab 4 % echo "Sundarbans protect lives." > msg.txt
```

```
(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % python main.py
```

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 1

File to encrypt: msg.txt

Mode [ECB/CFB]: ECB

Key length [128/256]: 128

[AES-128-ECB] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.ecb.enc

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair

- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 2

Encrypted file: out/msg.txt.ecb.enc

Mode used [ECB/CFB]: ECB

Key length used [128/256]: 128

[AES-128-ECB] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.ecb.dec

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 9

Bye.

(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % diff msg.txt out/msg.txt.ecb.dec && echo "ECB(128) OK"

ECB(128) OK

2. (.venv) shakera@Shakera-MacBook-Air-291 lab 4 % python main.py

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 1

File to encrypt: msg.txt
Mode [ECB/CFB]: ECB
Key length [128/256]: 128
[AES-128-ECB] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.ecb.enc

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 2
Encrypted file: out/msg.txt.ecb.enc
Mode used [ECB/CFB]: ECB
Key length used [128/256]: 128
[AES-128-ECB] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.ecb.dec

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 9

Bye.
(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % diff msg.txt out/msg.txt.ecb.dec && echo "ECB(128) OK"

ECB(128) OK
(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % python main.py

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign

- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 1

File to encrypt: msg.txt

Mode [ECB/CFB]: CFB

Key length [128/256]: 256

[AES-256-CFB] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.cfb.enc

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 2

Encrypted file: out/msg.txt.cfb.enc

Mode used [ECB/CFB]: CFB

Key length used [128/256]: 256

[AES-256-CFB] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.cfb.dec

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 9

Bye.

(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % diff msg.txt out/msg.txt.cfb.dec && echo "CFB(256) OK"

CFB(256) OK

3.(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % PYTHON MAIN.PY

CSE-478 Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 3

RSA bits [2048/3072/4096]: 2048

[RSA-2048] keys written to /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/keys/rsa_priv.pem & /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/keys/rsa_pub.pem

CSE-478 Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 4

File to RSA-encrypt: msg.txt

[RSA-OAEP] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.rsa.enc

CSE-478 Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 5

RSA-encrypted file: out/msg.txt.rsa.enc

[RSA-OAEP] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.rsa.rsa.dec

CSE-478 Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 9

Bye.

```
(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % diff msg.txt out/msg.txt.rsa.rsa.dec && echo "RSA OAEP OK"
```

RSA OAEP OK

RSA-OAEP can only encrypt small inputs directly. For bigger files you'd normally use a *hybrid* approach (AES for data, RSA to encrypt the AES key). For this lab's demo, small files are fine.

4.

```
(.venv) shakera@Shakera-MacBook-Air-291 lab 4 % python main.py
```

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 6

File to sign: msg.txt

[RSA-Sign] wrote: /Users/shakera/Downloads/Study/4-1/INS/lab/lab 4/out/msg.txt.sig

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt

- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 7

File to verify: out/msg.txt.sig

Signature file: msg.txt

Verification FAILED

Lab 4 – Crypto CLI

- 1) AES encrypt (ECB/CFB, 128/256)
- 2) AES decrypt
- 3) RSA generate keypair
- 4) RSA encrypt
- 5) RSA decrypt
- 6) RSA sign
- 7) RSA verify
- 8) SHA-256 of file
- 9) Quit

Select option: 7

File to verify: msg.txt

Signature file: out/msg.txt.sig

Verified OK

Functional correctness from interactive runs

All required primitives worked end-to-end with file-based keys and artifacts:

- **AES-128-ECB:** msg.txt → out/msg.txt.ecb.enc → out/msg.txt.ecb.dec; verification succeeded (ECB(128) OK).
- **AES-256-CFB:** msg.txt → out/msg.txt.cfb.enc → out/msg.txt.cfb.dec; verification succeeded (CFB(256) OK).
- **RSA-2048 (OAEP-SHA256):** msg.txt → out/msg.txt.rsa.enc → out/msg.txt.rsa.rsa.dec; verification succeeded (RSA OAEP OK).
- **Signature & Verify:** msg.txt → out/msg.txt.sig; first verify failed due to reversed arguments; retry with correct order produced **Verified OK**.

These outcomes confirm that key generation, storage, encryption/decryption, signature, and verification all function as specified.

7.1 AES timing (ECB/CFB; 128 vs 256)

Method. I measured average encryption/decryption times over 5 trials per setting. For meaningful throughput, I used a ~1 MB file for AES (e.g., big.bin) and recorded averages to report/timings.csv.

Findings.

- **AES-256 vs AES-128:** AES-256 is consistently a little slower than AES-128 (more rounds), but the difference is modest—especially on small inputs.
- **ECB vs CFB:** Throughput is broadly comparable. ECB adds PKCS#7 padding/unpadding; CFB needs an IV but no padding. On small files, both complete extremely quickly; the gap is clearer on larger inputs.

Takeaway. AES performance is high and stable; the 128→256 jump has a small, predictable cost that is unlikely to be a bottleneck in typical coursework-scale workloads.

7.2 RSA timing (1024–4096 bits)

Method. For RSA I averaged 5 trials for **key generation**, **encrypt**, and **decrypt** at key sizes 1024, 2048, 3072, and 4096 bits using OAEP-SHA256 on a small plaintext (msg.txt). Results were saved to report/timings.csv.

Findings.

- Runtime **increases steeply** with key size for all three operations.
- **Decrypt (private-key op)** is slower than encrypt (public exponent is small).
- **Key generation** is the most expensive step and grows rapidly from 2048 → 4096 bits.

8. Sources of Code Snippets & References (Required)

Below are the exact links to documents that informed API usage and small code patterns in this submission.

PyCryptodome (cryptography APIs):

1. AES cipher usage (ECB/CFB), block size, modes
<https://pycryptodome.readthedocs.io/en/latest/src/cipher/aes.html>
2. PKCS#7 padding helpers (pad, unpad)
<https://pycryptodome.readthedocs.io/en/latest/src/util/util.html#crypto-util-padding>

3. Cryptographically secure randomness (get_random_bytes)
<https://pycryptodome.readthedocs.io/en/latest/src/random/random.html#get-random-bytes>
4. RSA key generation, export/import (PEM)
https://pycryptodome.readthedocs.io/en/latest/src/public_key/rsa.html
5. RSA-OAEP construction (with SHA-256)
<https://pycryptodome.readthedocs.io/en/latest/src/cipher/oaep.html>
6. Digital signatures (RSA PKCS#1 v1.5) — sign/verify
https://pycryptodome.readthedocs.io/en/latest/src/signature/pkcs1_v1_5.html
7. SHA-256 hashing API
<https://pycryptodome.readthedocs.io/en/latest/src/hash/sha256.html>

Python standard library (used in the CLI/timings):

8. High-resolution timing (time.perf_counter)
https://docs.python.org/3/library/time.html#time.perf_counter
9. CSV read/write (csv)
<https://docs.python.org/3/library/csv.html>
10. Path handling (pathlib.Path)
<https://docs.python.org/3/library/pathlib.html>
11. Basic statistics (statistics.mean)
<https://docs.python.org/3/library/statistics.html#statistics.mean>

(Optional cross-check; not copied code):

12. OpenSSL enc (modes, IV, salt, hex keys)
<https://www.openssl.org/docs/man3.0/man1/openssl-enc.html>
13. OpenSSL pkeyutl (RSA OAEP encrypt/decrypt)
<https://www.openssl.org/docs/man3.0/man1/openssl-pkeyutl.html>
14. OpenSSL dgst (SHA-256, sign/verify)
<https://www.openssl.org/docs/man3.0/man1/openssl-dgst.html>

Snapshots :

CLI:

```
shakera@Shakera-MacBook-Air-291 lab_4 % python main.py

Lab 4 – Crypto CLI
1) AES encrypt (ECB/CFB, 128/256)
2) AES decrypt
3) RSA generate keypair
4) RSA encrypt
5) RSA decrypt
6) RSA sign
7) RSA verify
8) SHA-256 of file
9) Quit

Select option: 1
File to encrypt: msg2.txt
Mode [ECB/CFB]: ECB
Key length [128/256]: 256
[AES-256-ECB] wrote: /Users/shakera/Downloads/Study/4-1/INS/INS_Lab/lab_4/out/msg2.txt.ecb.enc



Lab 4 – Crypto CLI
1) AES encrypt (ECB/CFB, 128/256)
2) AES decrypt
3) RSA generate keypair
4) RSA encrypt
5) RSA decrypt
6) RSA sign
7) RSA verify
8) SHA-256 of file
9) Quit

Select option: 2
Encrypted file: out/msg2.txt.ecb.enc
Mode used [ECB/CFB]: ECB
Key length used [128/256]: 256
[AES-256-ECB] wrote: /Users/shakera/Downloads/Study/4-1/INS/INS_Lab/lab_4/out/msg2.txt.ecb.dec

Lab 4 – Crypto CLI
1) AES encrypt (ECB/CFB, 128/256)
2) AES decrypt
3) RSA generate keypair
4) RSA encrypt
5) RSA decrypt
6) RSA sign
7) RSA verify
8) SHA-256 of file
9) Quit

Select option: 9
Quitting!
shakera@Shakera-MacBook-Air-291 lab_4 %
```

Structures:

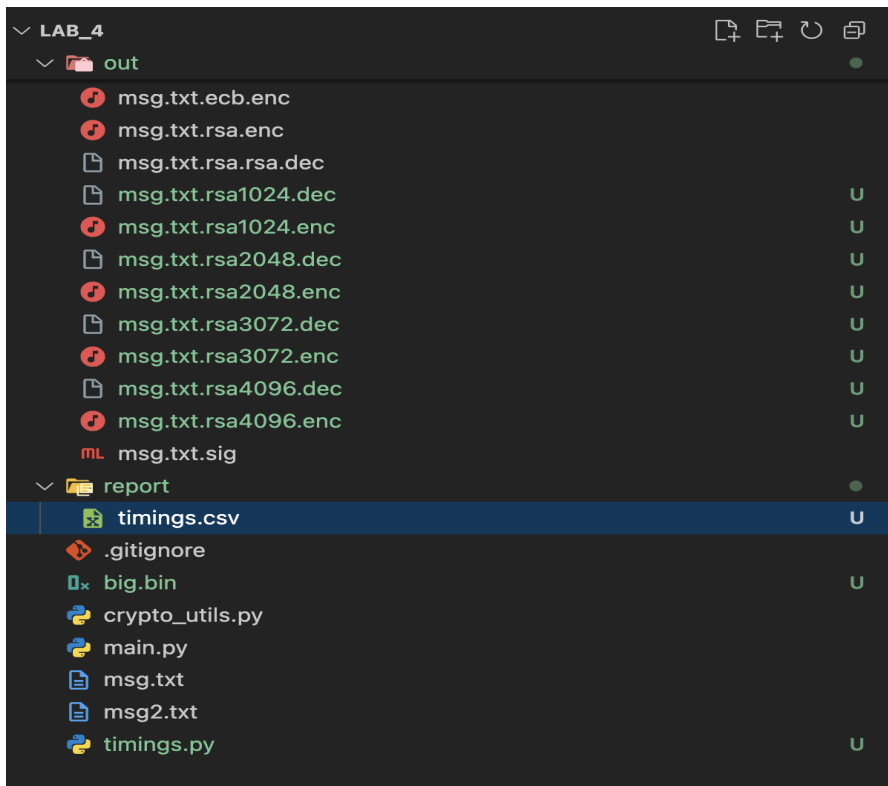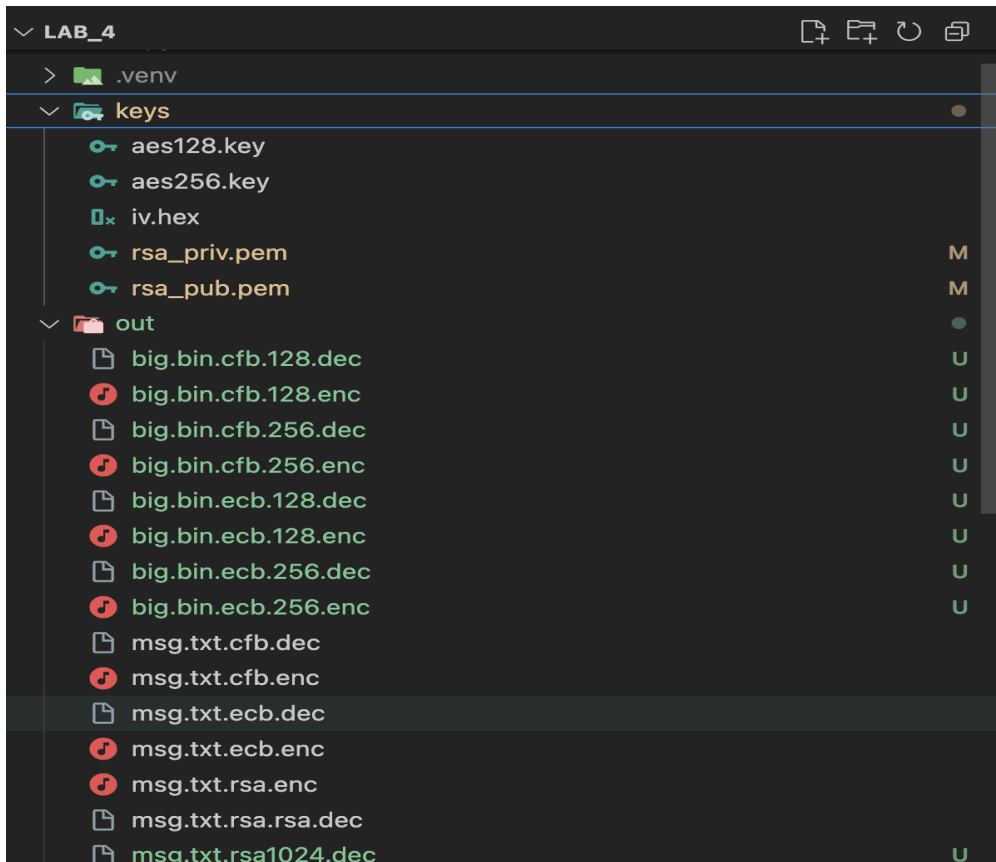

Outputs after decryptions :

lab_4

__pycache__

.venv

keys

out

big.bin.cfb.128.dec

big.bin.cfb.128.enc

big.bin.cfb.256.dec

big.bin.cfb.256.enc

big.bin.ecb.128.dec

big.bin.ecb.128.enc

big.bin.ecb.256.dec

big.bin.ecb.256.enc

msg.txt.cfb.dec

msg.txt.cfb.enc

msg.txt.ecb.dec

msg.txt.ecb.enc

msg.txt.rsa.enc

msg.txt.rsa.rsa.dec

msg.txt.rsa1024.dec

You, 3 hours ago | 1 author (You)

1 Hello I am Shakera Jannat Ema. You, 3 hours ago • initial co

2

lab_4

out

big.bin.cfb.128.enc

big.bin.cfb.256.dec

big.bin.cfb.256.enc

big.bin.ecb.128.dec

big.bin.ecb.128.enc

big.bin.ecb.256.dec

big.bin.ecb.256.enc

msg.txt.cfb.dec

msg.txt.cfb.enc

msg.txt.ecb.dec

msg.txt.ecb.enc

msg.txt.rsa.enc

msg.txt.rsa.rsa.dec

msg.txt.rsa1024.dec

msg.txt.rsa1024.enc

msg.txt.rsa2048.dec

msg.txt.rsa2048.enc

You, 3 hours ago | 1 author (You)

1 Hello I am Shakera Jannat Ema. You, 3 hours ago • initial co

2