

Splunk Journey – Day 04

Date: 2026-06-15

Objective: Learn the fundamentals of scheduling reports and configuring alerts within Splunk to automate data monitoring and visibility.

Save as Report

Saving a search as a report allows you to preserve a specific query and its visualization for consistent future access. Reports can be scheduled to run at specific intervals and their results can be shared with other users or added to dashboards.

The screenshot displays the Splunk Enterprise interface. A 'Save As Report' dialog box is open in the center, allowing a user to save the current search as a report. The dialog includes the following fields:

- Title:** A text input field.
- Description:** A text input field with the placeholder text 'optional'.
- Content:** A dropdown menu currently set to 'Events'.
- Time Range Picker:** Two buttons, 'Yes' and 'No', for selecting the time range.

At the bottom of the dialog are 'Cancel' and 'Save' buttons. The background shows a search results table with the following structure:

Time	Event
8/24/16 11:15:16.000 AM	<Event xmlns="http://schemas.microsoft.com/win/2004/08/events/event"><System><Provider Name="Microsoft-Windows-Sysmon" Guid="{5770385F-C22A-43E0-BF4C-06F5698FFB09}" /><EventID>3</EventID><Version>5</Version><Level>4</Level><Task>3</Task><Opcode>0</Opcode><Keywords>0x8000000000000000</Keywords><TimeCreated SystemTime="2016-08-24T17:15:16.478890000Z"/><EventRecordID>411601</EventRecordID><Correlation><Execution ProcessID="1216" ThreadID="1828"/><Channel>Microsoft-Windows-Sysmon/Operational</Channel><Computer>we8105desk.waynecorpinc.local</Computer><Security UserID="S-1-5-18"/></System><EventData><Data Name="UtcTime">2016-08-24 17:15:13.016</Data><Data Name="ProcessGuid">{0F2D76F0-D007-57B0-0000-001000C73500}</Data><Data Name="ProcessId">3588</Data><Data Name="Image">C:\Users\bob.smith.WAYNECORPINC\AppData\Roaming\35ACA89F-933F-6A5D-2776-A3589FB99832\osk.exe</Data><Data Name="User">WAYNECORPINC\bob.smith</Data><Data Name="Protocol">udp</Data><Data Name="Initiated">true</Data><Data Name="SourceIsIpv6">false</Data><Data Name="SourceIp">192.168.250.100</Data><Data Name="SourceHostname">we8105desk.waynecorpinc.local</Data><Data Name="SourcePort">49457</Data><Data Name="SourcePortName"></Data><Data Name="DestinationIsIpv6">false</Data><Data Name="DestinationIp">85.93.4.51</Data><Data Name="DestinationHostname">host1.admirenews.com</Data><Data Name="Destin

Splunk Enterprise interface showing the "Save As Report" dialog box. The dialog prompts for a Title ("Network_Sales_Weakly"), Description ("optional"), and Content type ("Events"). It also includes a Time Range Picker with "Yes" and "No" options. The background shows a search results page with a search query: `index="botsv1" host1.admirenews.com`. The search results display 5 events from 7/31/16 6:00:00.000 PM to 6/15/26 12:55:49.000 AM. The interface includes navigation tabs for Search, Analytics, Datasets, Reports, Alerts, and Dashboards. The "Save As Report" dialog has buttons for "Cancel" and "Save".

View Report


Viewing a report displays the most recent data captured by the saved search parameters, providing an immediate snapshot of system performance or security metrics. It enables users to drill down into specific events and analyze trends without needing to rewrite complex search queries.

Splunk Enterprise interface showing the "Network_Sales_Weakly" report. The report displays 5 events from 7/31/16 6:00:00.000 PM to 6/15/26 12:55:49.000 AM. The interface includes navigation tabs for Search, Analytics, Datasets, Reports, Alerts, and Dashboards. The report title "Network_Sales_Weakly" is displayed at the top. Below the title, there are buttons for "Edit", "More Info", and "Add to Dashboard". The report content shows a table with columns for Time and Event. The first event is dated 8/24/16 at 11:15:16.000 AM. The event details include a large XML snippet representing a Windows Sysmon event. The interface also includes a "20 per page" dropdown menu and a "Job" button.

i	Time	Event
>	8/24/16 11:15:16.000 AM	<Event xmlns="http://schemas.microsoft.com/win/2004/08/events/event"><System<Provider Name="Microsoft-Windows-Sysmon" Guid="{5770385F-C22A-43E0-BF4C-06F5698FFBD9}" /><EventID>3</EventID><Version>5</Version><Level>4</Level><Task>3</Task><Opcode>0</Opcode><Keywords>0x8000000000000000</Keywords><TimeCreated SystemTime="2016-08-24T17:15:16.47889000Z" /><EventRecordID>411601</EventRecordID><Correlation><Execution ProcessID="1216" ThreadID="1828" /><Channel>Microsoft-Windows-Sysmon/Operational</Channel><Computer>we8105desk.waynecorpinc.local</Computer><Security UserID="S-1-5-18" /></System><EventData><Data Name="UtcTime">2016-08-24 17:15:13.016</Data><Data Name="ProcessGuid">{0F2D76F0-D007-57BD-0000-00100C73500}</Data><Data Name="ProcessId">3588</Data><Data Name="Image">C:\Users\bob.smith.WAYNECORPINC\AppData\Roaming\{35AC89F-933F-6A5D-2776-A3589FB99832}\osk.exe</Data><Data Name="User">WAYNECORPINC\bob.smith</Data><Data Name="Protocol">udp</Data><Data Name="Initiated">true</Data><Data Name="SourceIsIpv6">false</Data><Data Name="SourceIp">192.168.250.100</Data><Data Name="SourceHostname">we8105desk.waynecorpinc.local</Data><Data Name="SourcePort">49457</Data><Data Name="SourcePortName"></Data><Data Name="DestinationIsIpv6">false</Data><Data Name="DestinationIp">85.93.4.51</Data><Data Name="DestinationHostname">host1.admirenews.com</Data></EventData></Event>
>	8/24/16 10:49:58.000 AM	<Event xmlns="http://schemas.microsoft.com/win/2004/08/events/event"><System<Provider Name="Microsoft-Windows-Sysmon" Guid="{5770385F-C22A-43E0-BF4C-06F5698FFBD9}" /><EventID>3</EventID><Version>5</Version><Level>4</Level><Task>3</Task><Opcode>0</Opcode><Keywords>0x8000000000000000</Keywords><TimeCreated SystemTime="2016-08-24T16:49:58.015Z" /><EventRecordID>385148</EventRecordID><Correlation><Execution ProcessID="1216" ThreadID="1828" /><Channel>Microsoft-Windows-Sysmon/Operational</Channel><Computer>we8105desk.waynecorpinc.local</Computer><Security UserID="S-1-5-18" /></System><EventData><Data Name="UtcTime">2016-08-24 16:49:56.015</Data><Data Name="ProcessGuid">{0F2D76F0-D007-57BD-0000-00100C73500}</Data><Data Name="ProcessId">3588</Data><Data Name="Image">C:\Users\bob.smith.WAYNECORPINC\AppData\Roaming\{35AC89F-933F-6A5D-2776-A3589FB99832}\osk.exe</Data><Data Name="User">WAYNECORPINC\bob.smith</Data><Data Name="Protocol">udp</Data><Data Name="Initiated">true</Data><Data Name="SourceIsIpv6">false</Data><Data Name="SourceIp">192.168.250.100</Data><Data Name="SourceHostname">we8105desk.waynecorpinc.local</Data><Data Name="SourcePort">62997</Data><Data Name="SourcePortName"></Data><Data Name="DestinationIsIpv6">false</Data><Data Name="DestinationIp">85.93.4.51</Data><Data Name="DestinationHostname">host1.admirenews.com</Data></EventData></Event>



Triggered Alerts

Triggered alerts are automated notifications that occur when search results meet predefined conditions, such as a spike in errors or failed login attempts. These alerts ensure that critical issues are brought to the attention of administrators in real-time through various notification methods.

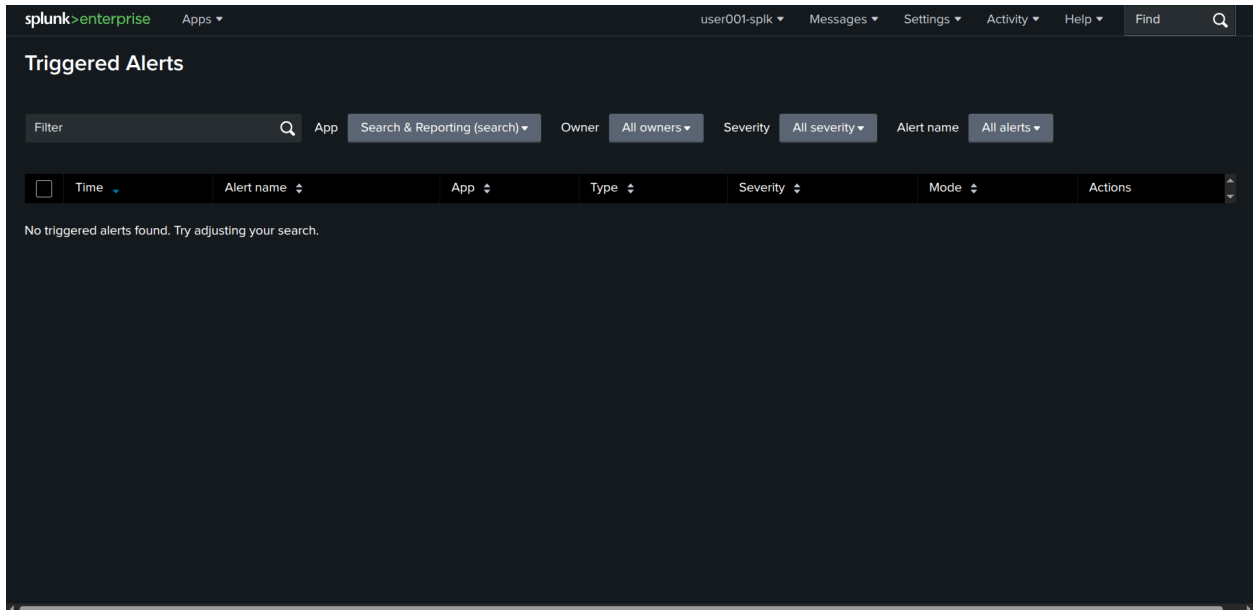

Managing Reports

Managing reports involves organizing, editing, and controlling access permissions for all saved search objects within your Splunk environment. This centralized management allows you to update schedules, modify query logic, or retire obsolete reports to maintain an efficient workspace.

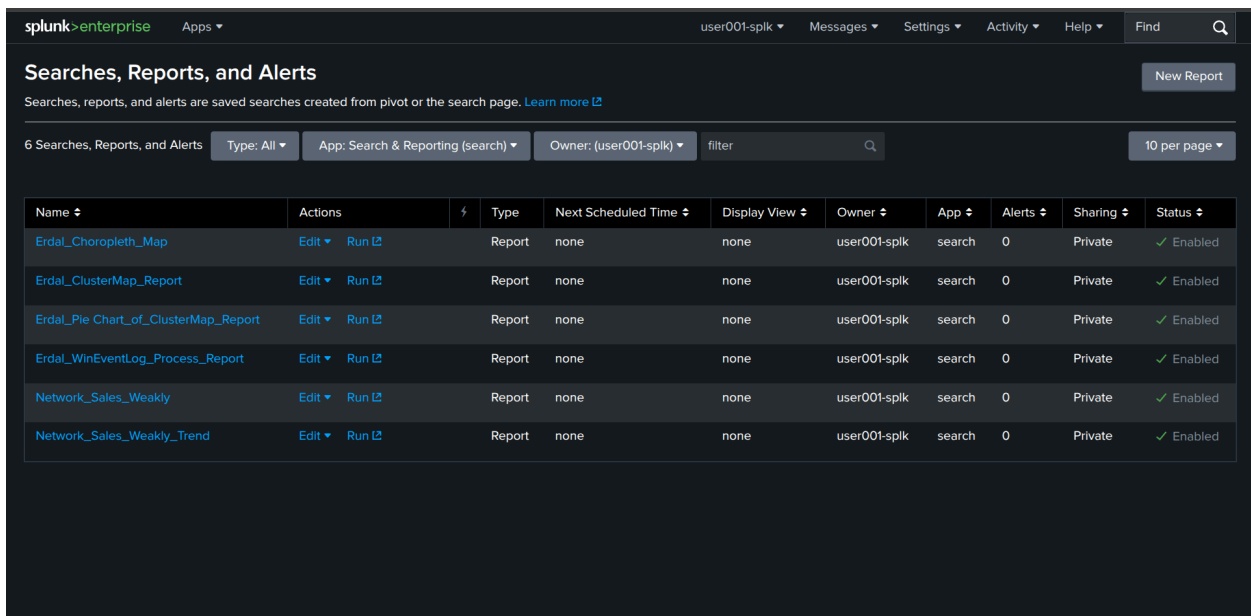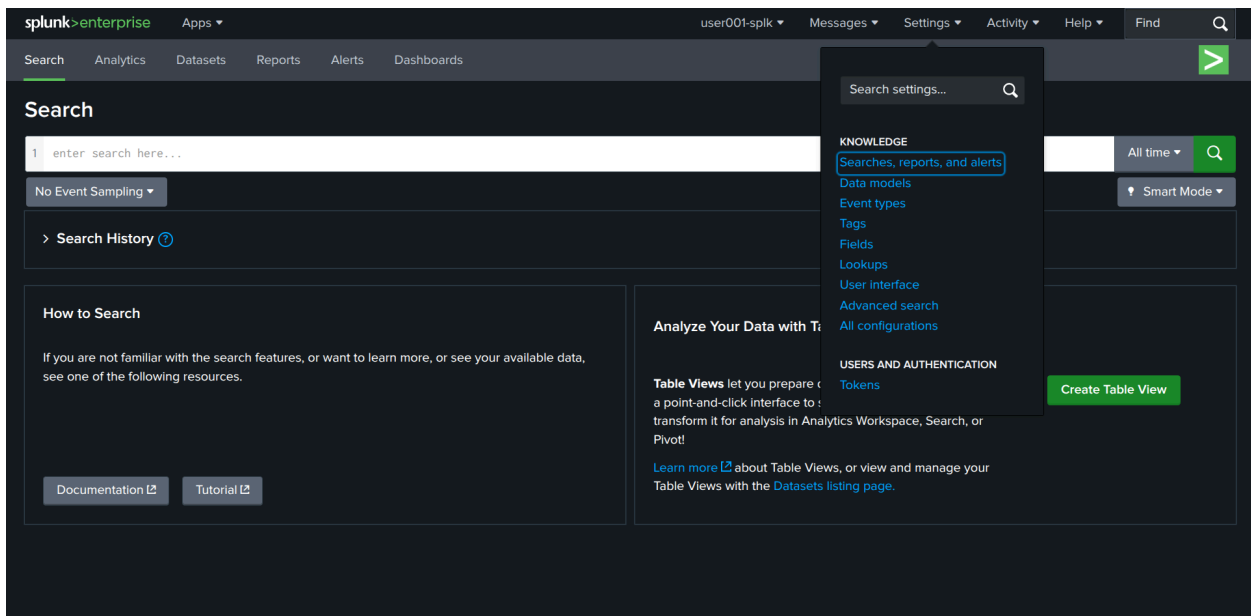

Managing Alerts

Managing alerts allows users to refine the sensitivity of monitoring by adjusting thresholds and suppression settings to reduce noise. It also involves configuring alert actions, such as running scripts or sending emails, to ensure an appropriate response to specific system triggers.

