Pizza Sales Presentation

SQL-driven insights on orders, revenue and customer preferences



Oct 26, 2026

Shakel Nawaz Khan

Introduction :


This project analyses a year of pizza sales data using SQL to understand what sells, when it sells and how much revenue it generates. The data is spread across linked tables (orders, order details, pizzas and pizza types), so the analysis joins them to answer business questions in three stages:

Basic: total orders, total revenue, the highest-priced pizza, the most common size and the top 5 pizza types by quantity.

Intermediate: quantity by pizza category, orders by hour of day, category-wise distribution, average pizzas ordered per day and the top 3 pizza types by revenue.

Advanced: each pizza type's percentage of total revenue, cumulative revenue over time and the top 3 pizza types by revenue within each category.

Objective : To help the business spot best-sellers, find its peak ordering hours and focus on the pizzas and categories that drive the most revenue.

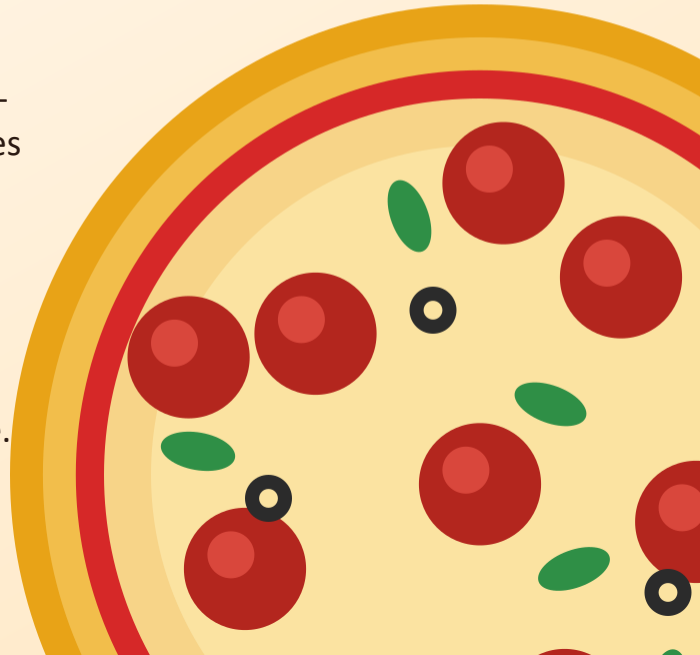

Total number of orders placed.


```sql
-- Retrieve the total number of orders placed.

SELECT
    *
FROM
    orders;
SELECT
    COUNT(order_id) AS total_orders
FROM
    Orders;

```

Result Grid

	total_orders
▶	21350

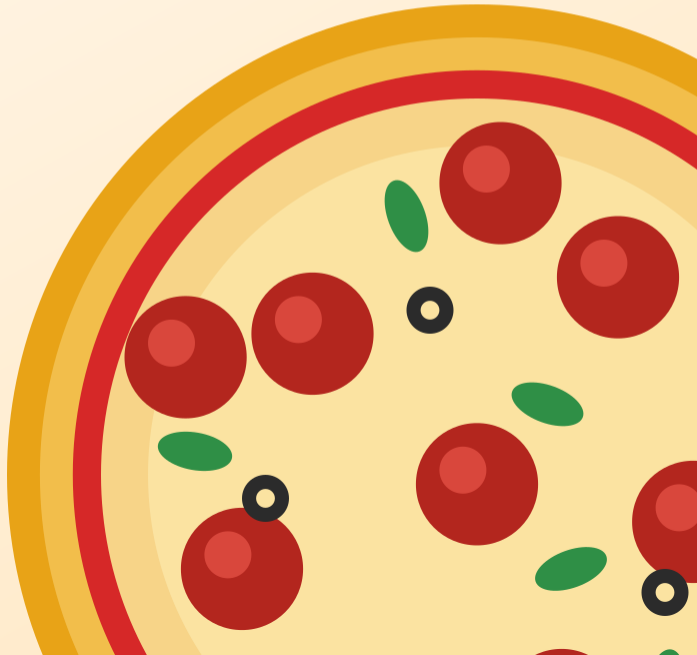

Total revenue generated from pizza sales.

```sql
-- Calculate the total revenue generated from pizza sales.

SELECT
    ROUND(SUM(orders_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    orders_details
        JOIN
    pizzas ON pizzas.pizza_id = orders_details.pizza_id;
```

Result Grid

	total_sales
▶	817860.05



The highest-priced pizza.

```sql
-- Identify the highest-priced pizza.

SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

Result Grid | Filter R

name	price
The Greek Pizza	35.95



The most common pizza size ordered.

```sql
-- Identify the most common pizza size ordered.
select quantity, count(order_details_id)
from orders_details group by quantity;
Select pizzas.size, count(orders_details.Order_details_id)
from pizzas join orders_details
on pizzas.pizza_id = orders_details.pizza_id
group by pizzas.size;
SELECT
    pizzas.size,
    COUNT(orders_details.Order_details_id) AS order_count
FROM
    pizzas
        JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid

size	order_count
L	18526
M	15385
S	14137
XL	544
XXL	28




Top 5 most ordered pizza types along with their quantities.

```sql
-- List the top 5 most ordered pizza types along with their quantities.
Select pizza_types.name,
orders_details.quantity
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join orders_details
on orders_details.pizza_id = pizzas.pizza_id;
SELECT
    pizza_types.name, SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid | Filter Rows:

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

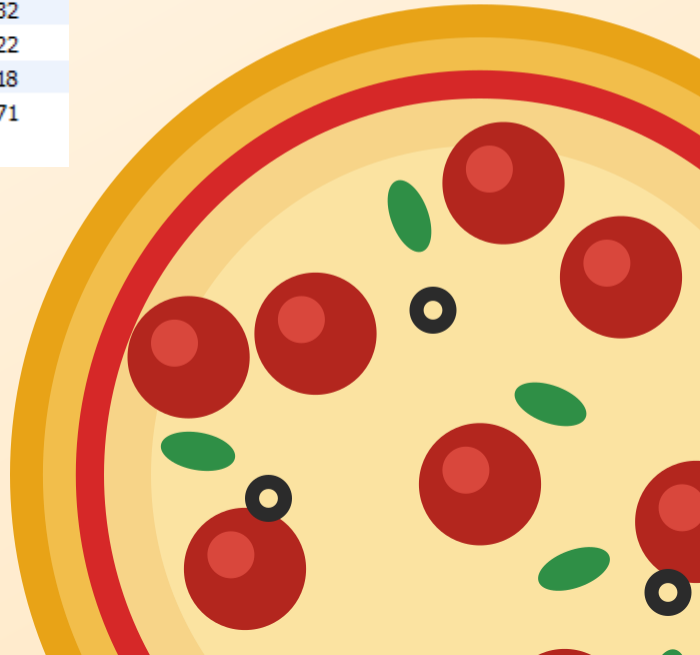

Join the necessary tables to find the total quantity of each pizza category ordered.

```sql
-- Intermediate
-- Join the necessary tables to find the total quantity of each pizza category ordered.

SELECT
    pizza_types.category,
    SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

Result Grid | Filt

category	quantity
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050




Determine the distribution of orders by hour of the day.

```sql
-- Determine the distribution of orders by hour of the day.

select * from orders;
SELECT
    HOUR(oder_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(oder_time);
```

Result Grid

hour	order_count
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920
17	2336

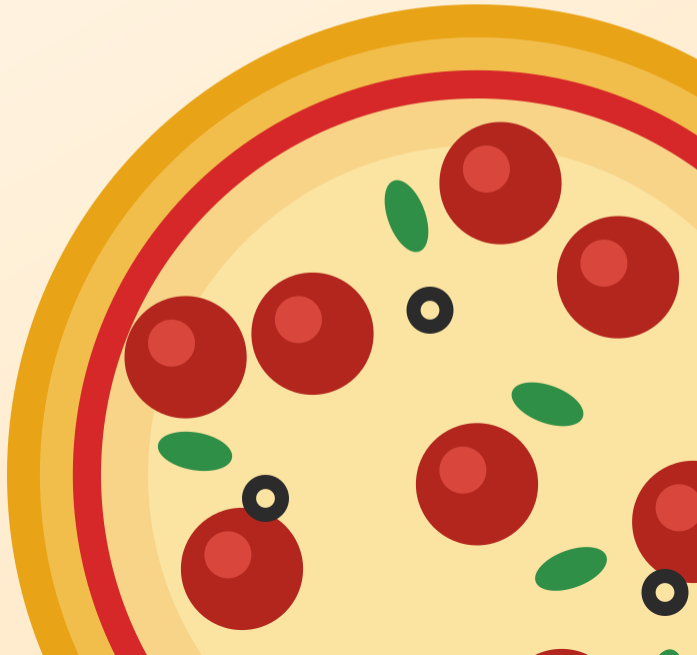


Join relevant tables to find the category-wise distribution of pizzas.

```sql
-- Join relevant tables to find the category-wise distribution of pizzas.

SELECT
    category, COUNT(name)
FROM
    pizza_types
GROUP BY category;
```

Result Grid | Filter

category	count(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

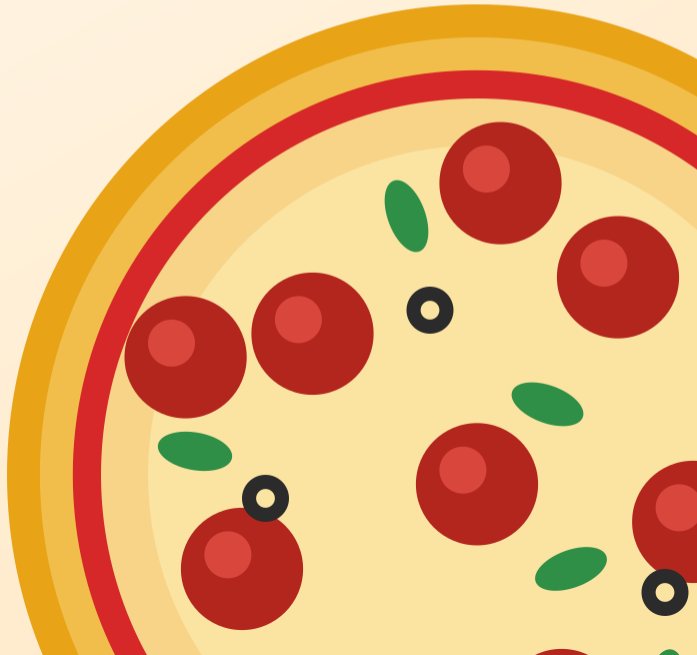

Group the orders by date and calculate the average number of pizzas ordered per day.

```sql
-- Group the orders by date and calculate the average number of pizzas ordered per day.

SELECT
    ROUND(AVG(quantity), 0) as avg_pizza_ordered_per_day
FROM
    (SELECT
        orders.order_date, SUM(orders_details.quantity) AS quantity
    FROM
        orders
    JOIN orders_details ON orders.order_id = orders_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid | Filter Rows:

avg_pizza_ordered_per_day
138




Top 3 most ordered pizza types based on revenue.

```sql
-- Determine the top 3 most ordered pizza types based on revenue.

SELECT
    pizza_types.name,
    SUM(orders_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

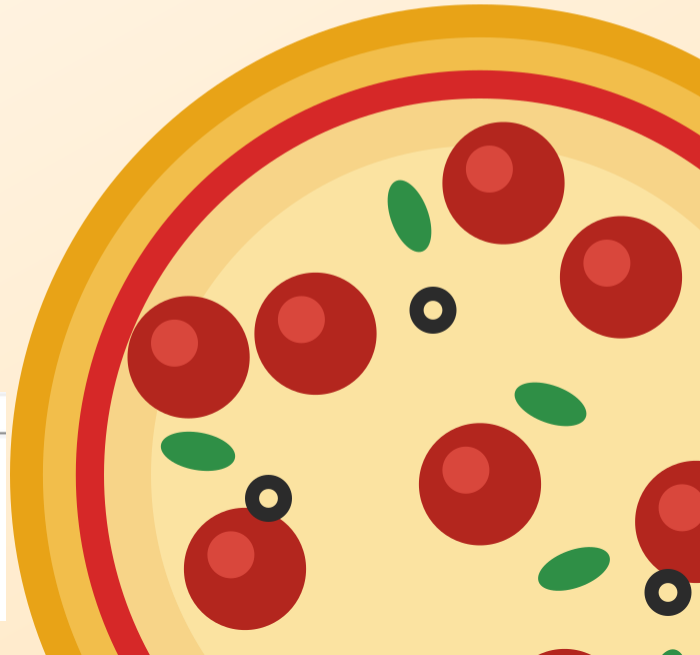


Calculate the percentage contribution of each pizza type to total revenue.

```sql
-- Calculate the percentage contribution of each pizza type to total revenue.

SELECT
    pizza_types.category,
    ROUND(SUM(orders_details.quantity * pizzas.price) / (SELECT
                    ROUND(SUM(orders_details.quantity * pizzas.price),
                                2) AS total_sales
                FROM
                    orders_details
                        JOIN
                    pizzas ON pizzas.pizza_id = orders_details.pizza_id) * 100,
            2) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

Result Grid | Filter R

category	revenue
Classic	26.91
Supreme	25.46
Chicken	23.96
Veggie	23.68

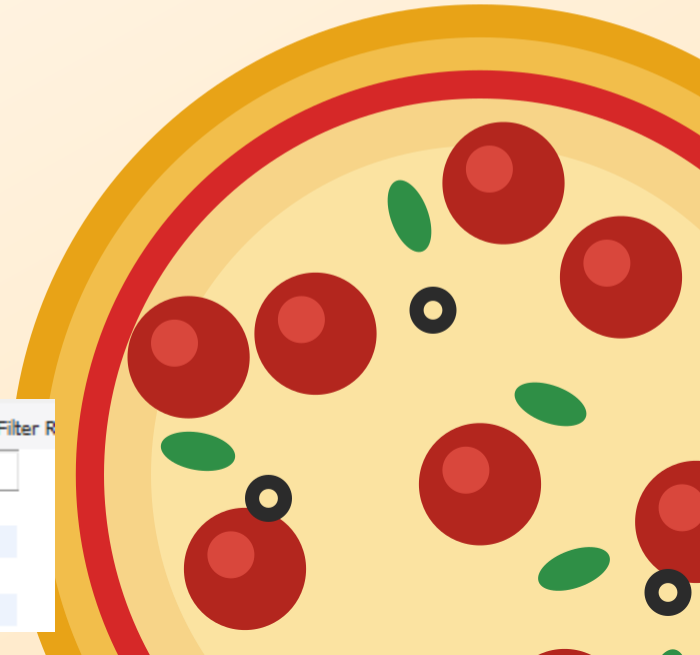

Analyze the cumulative revenue generated over time.

```sql
-- Analyze the cumulative revenue generated over time.

Select order_date,
sum(revenue) over (order by order_date) as cum_revenue
from
(select orders.Order_date,
sum(orders_details.quantity * pizzas.price) as revenue
from orders_details join pizzas
on orders_details.pizza_id = pizzas.pizza_id
join orders
on orders.Order_id = orders_details.Order_id
group by orders.Order_date) as sales;
```

Result Grid | Filter Rows:

order_date	cum_revenue
2015-01-01	2713.8500000000004
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5
2015-01-07	16560.7
2015-01-08	19399.05
2015-01-09	21526.4
2015-01-10	23990.350000000002
2015-01-11	25862.65
2015-01-12	27781.7
2015-01-13	29831.300000000003



Determine the top 3 most ordered pizza types based on revenue for each pizza category.

```sql
-- Determine the top 3 most ordered pizza types based on revenue for each pizza category.

select name , revenue
from
(Select category, name , revenue,
rank() over ( partition by category order by revenue desc) as rn
from
(Select pizza_types.category, pizza_types.name,
sum((orders_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join orders_details
on orders_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
Where rn <= 3;

```

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5
The Classic Deluxe Pizza	38180.5
The Hawaiian Pizza	32273.25
The Pepperoni Pizza	30161.75
The Spicy Italian Pizza	34831.25
The Italian Supreme Pizza	33476.75
The Sicilian Pizza	30940.5
The Four Cheese Pizza	32265.70000000065
The Mexicana Pizza	26780.75
The Five Cheese Pizza	26066.5