

Task:-2

*implements CI/CD pipeline
using jenkins*

<

Events

Instances

Capacity Manager [New](#)

AMI Catalog

Lifecycle Manager

Network Interfaces

Info

Instance state

Actions

Launch instances

Choose filter set ▼

🔍 Find Instance by attribute or tag (case-sensitive)

< 1 >

◀ ▶

 |

Tags

Info

 i-09001c37363bd2345

—

IP name: ip-172-31-25-118.ec2.internal

IPv4 (A)

54.90.126.84 | [open address](#)

Running

ip-172-31-25-118.ec2.internal

t2.micro

172.31.25.118

ec2-54-90-126-84.compute-1.amazonaws.com | open address ↗

[illegible]



Search

[Alt+S]



```

--pids-limit int      Tune container pids limit (set -1 for unlimited)
--platform string     Set platform if server is multi-platform capable
--privileged          Give extended privileges to this container
-p, --publish list    Publish a container's port(s) to the host
-P, --publish-all    Publish all exposed ports to random ports
--pull string         Pull image before running ("always", "missing", "never") (default "missing")
-q, --quiet           Suppress the pull output
--read-only           Mount the container's root filesystem as read only
--restart string      Restart policy to apply when a container exits (default "no")
--rm                 Automatically remove the container and its associated anonymous volumes when it exits
--runtime string      Runtime to use for this container
--security-opt list   Security Options
--shm-size bytes      Size of /dev/shm
--sig-proxy           Proxy received signals to the process (default true)
--stop-signal string  Signal to stop the container
--stop-timeout int    Timeout (in seconds) to stop a container
--storage-opt list    Storage driver options for the container
--sysctl map          Sysctl options (default map[])
--tmpfs list          Mount a tmpfs directory
-t, --tty            Allocate a pseudo-TTY
--ulimit ulimit       Ulimit options (default [])
--use-api-socket      Bind mount Docker API socket and required auth
-u, --user string     Username or UID (format: <name|uid>[:<group|gid>])
--userns string       User namespace to use
--uts string          UTS namespace to use
-v, --volume list     Bind mount a volume
--volume-driver string Optional volume driver for the container
--volumes-from list   Mount volumes from the specified container(s)
-w, --workdir string  Working directory inside the container

```

```
ubuntu@ip-172-31-21-38:~/Jenkins-Project$ docker rm -f my-container
```

```
my-container
```

```
ubuntu@ip-172-31-21-38:~/Jenkins-Project$ docker run -d --name my-container -p 5000:5000 my-app:latest
```

```
11ae9b11feb7448e12537eb687e0ffc2173b74dea26092ed6b08832177afff88
```

```
ubuntu@ip-172-31-21-38:~/Jenkins-Project$ docker ps
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
11ae9b11feb7	my-app:latest	"python app.py"	10 seconds ago	Up 9 seconds	0.0.0.0:5000->5000/tcp, [::]:5000->5000/tcp	my-cont

```
ubuntu@ip-172-31-21-38:~/Jenkins-Project$ docker logs my-container
```

```
* Serving Flask app 'app'
```

```
* Debug mode: off
```

```
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
```

```
* Running on all addresses (0.0.0.0)
```

 Build History

No builds in the queue.

Build Executor Status 0/2



 Add description

This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.

Create a job



Set up an agent



Configure a cloud



[Learn more about distributed builds](#)



18.212.204.17 / Console - #1

☆ ↻ 📄 📄 ☰ 🔊 Assistant

 Jenkins

My-First-CICD

#1

Status

Changes

Console Output

Edit Build Information

Delete build #1

Git Build Data

Download

Copy

View as plain text


Started by user [Shakti Kumar Behera](#)
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/My-First-CICD
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository <https://github.com/shaktibehera149-boop/Jenkins-Project.git>
 > git init /var/lib/jenkins/workspace/My-First-CICD # timeout=10
Fetching upstream changes from <https://github.com/shaktibehera149-boop/Jenkins-Project.git>
 > git --version # timeout=10
 > git --version # 'git version 2.43.0'
 > git fetch --tags --force --progress -- <https://github.com/shaktibehera149-boop/Jenkins-Project.git> +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git config remote.origin.url <https://github.com/shaktibehera149-boop/Jenkins-Project.git> # timeout=10
 > git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision b0db3ba3df7b103bf82acc4a5bf3e21d1c19e56a (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f b0db3ba3df7b103bf82acc4a5bf3e21d1c19e56a # timeout=10
Commit message: "initial Jenkins CICD project"
First time build. Skipping changelog.
[My-First-CICD] \$ /bin/sh -xe /tmp/jenkins9246408688371403563.sh
+ echo My first Jenkins CI/CD build
My first Jenkins CI/CD build
+ ls
Express-Frontend
Flask-Backend
requirements.txt
Finished: SUCCESS


Jenkins 2.555.3

10.202.120.29:8000

Pretty-print ☐

```
{"message": "Flask Backend Running"}
```



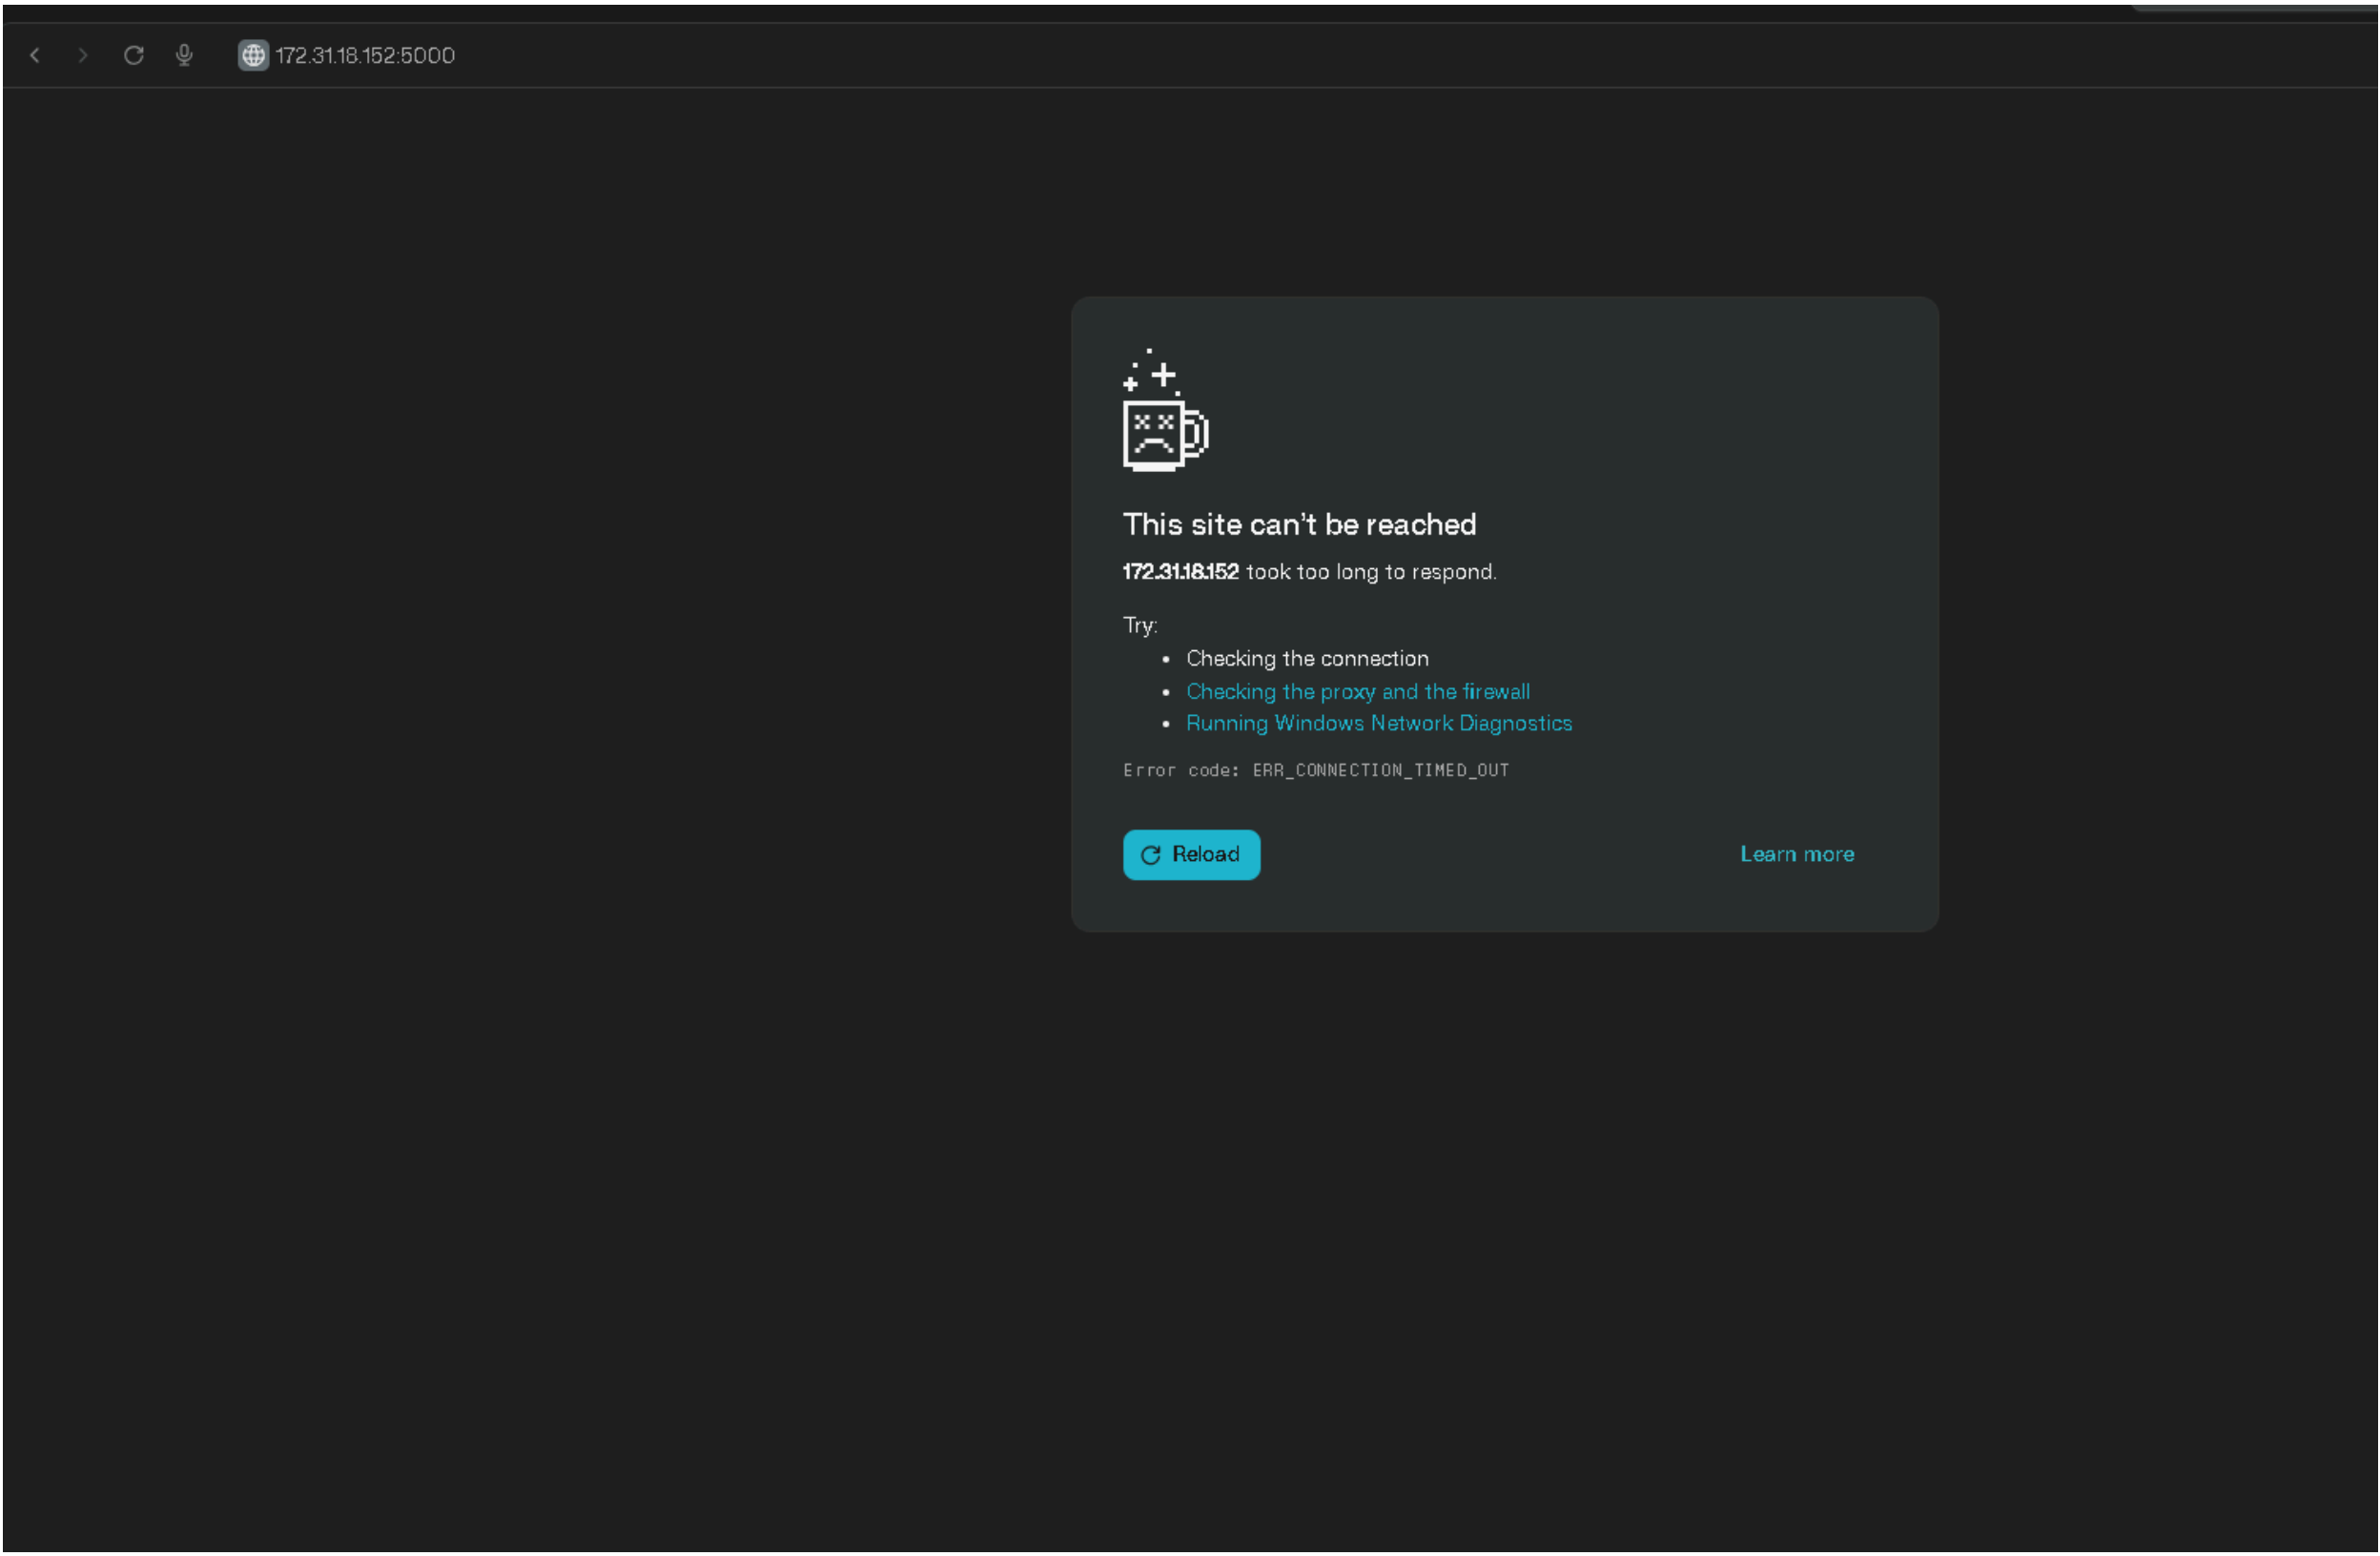

Wardiere Inc.

PROJECT REPORT

PRESENTATION





**THANK
YOU!**