

Specificity

→ Changing CSS → external
*
inline
internal

lecture52 > index.html > html > body > div#fdiv > p#fpara

```
2 <html lang="en">
```

```
3 <head>
```

```
4 <meta charset="UTF-8">
```

```
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
6 <title>Document</title>
```

```
7 </head>
```

```
8 <body>
```

9

```
10 <div id="fdiv">
```

11	First Div
----	-----------

```
12      <p id="fpara">
```

13			First Para
----	--	--	------------

14

```
15 <div id="sdiv">
```

16			Second div
----	--	--	------------


```
17      <p id="spara">Second para </p>
```

```
18         </div>
```

```
19      </div>
```

20

21 </body>

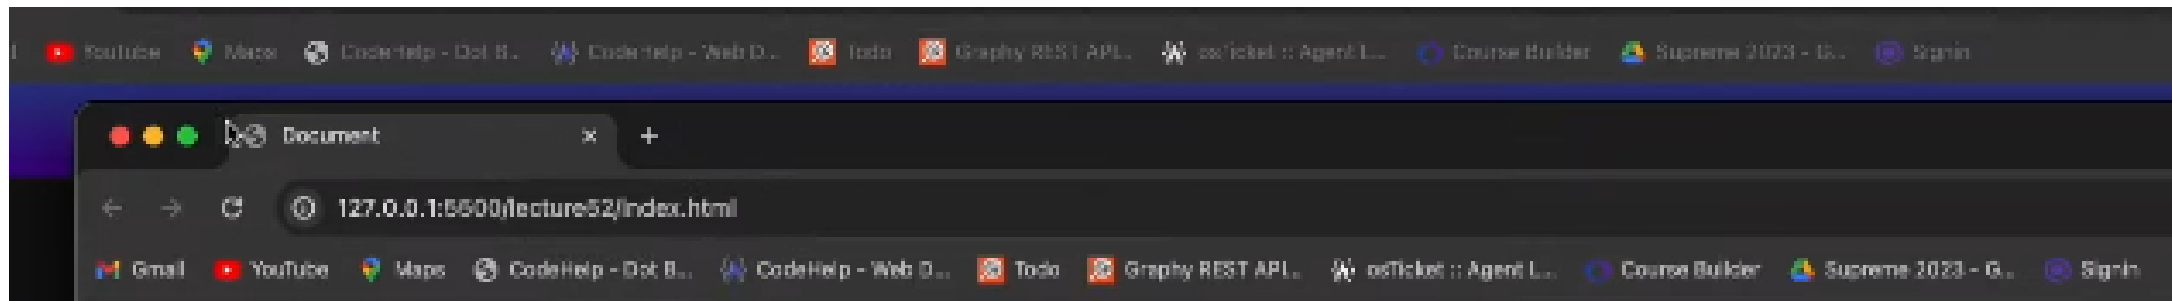

First Div


First Para


Second div



Second para

```
lecture50 U  index.html lecture51 U  JS index.js lecture51 U  index.html lecture52 U  X  index.html ./ U  CodehelpYTWebDev

lecture52 > index.html > html > body > div#fdiv > div#sdiv > p#spara
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>Document</title>
7  </head>
8  <body>
9
10     <div id="fdiv" style="background-color: aqua; padding: 2rem;">
11         First Div
12         <p id="fpara" style="background-color: green; padding: 1rem;">
13             First Para
14         </p>
15         <div id="sdiv" style="background-color: yellow; padding: 1.2rem;">
16             Second div
17             <p id="spara" style="background-color: orange; padding: 0.8rem;">
18                 Second para </p>
19         </div>
20     </div>
21 </body>
22 </html>
```

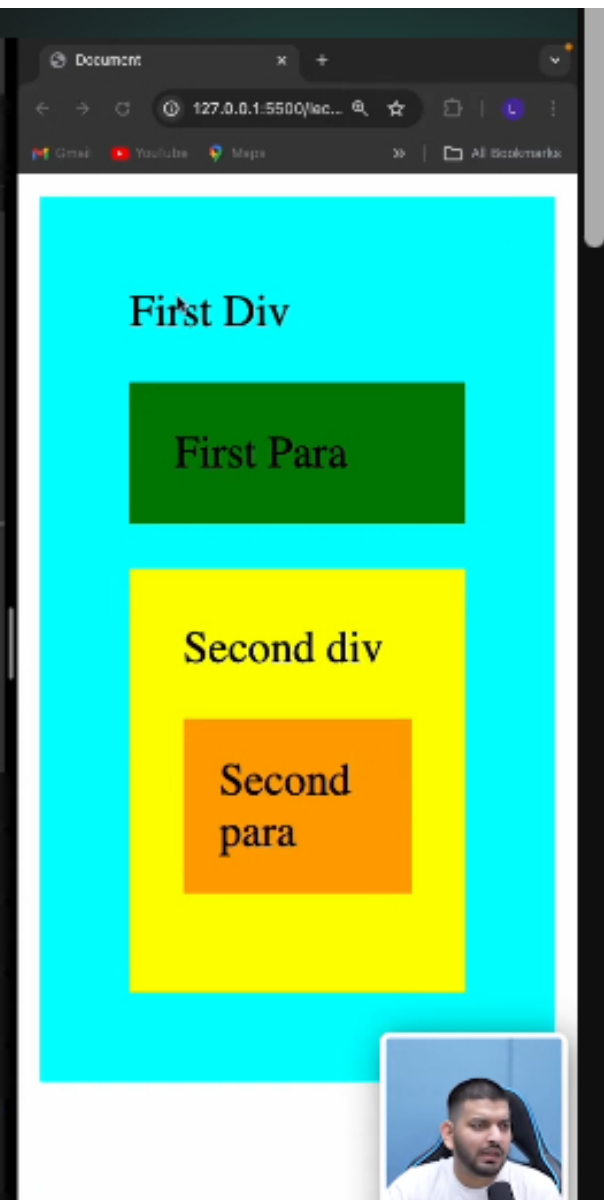

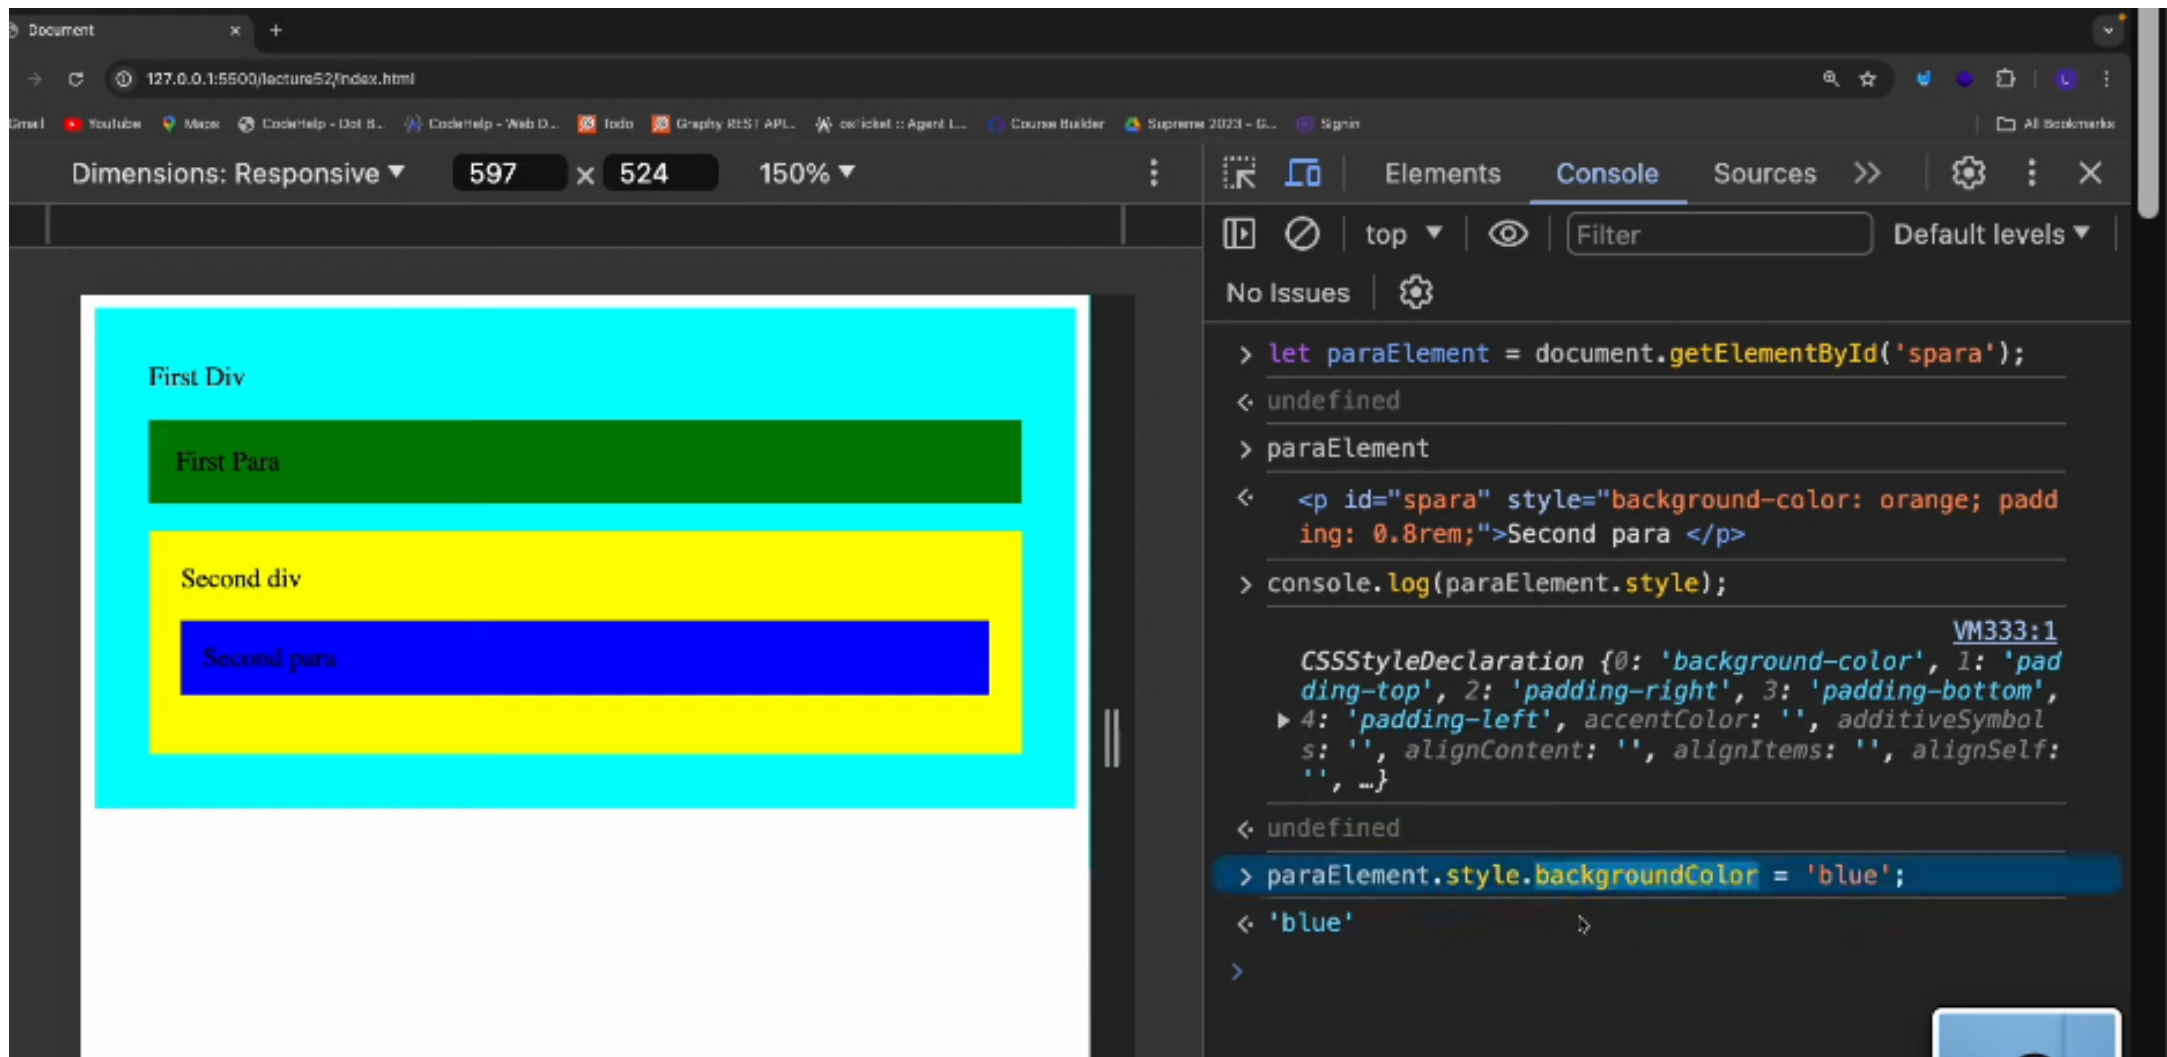

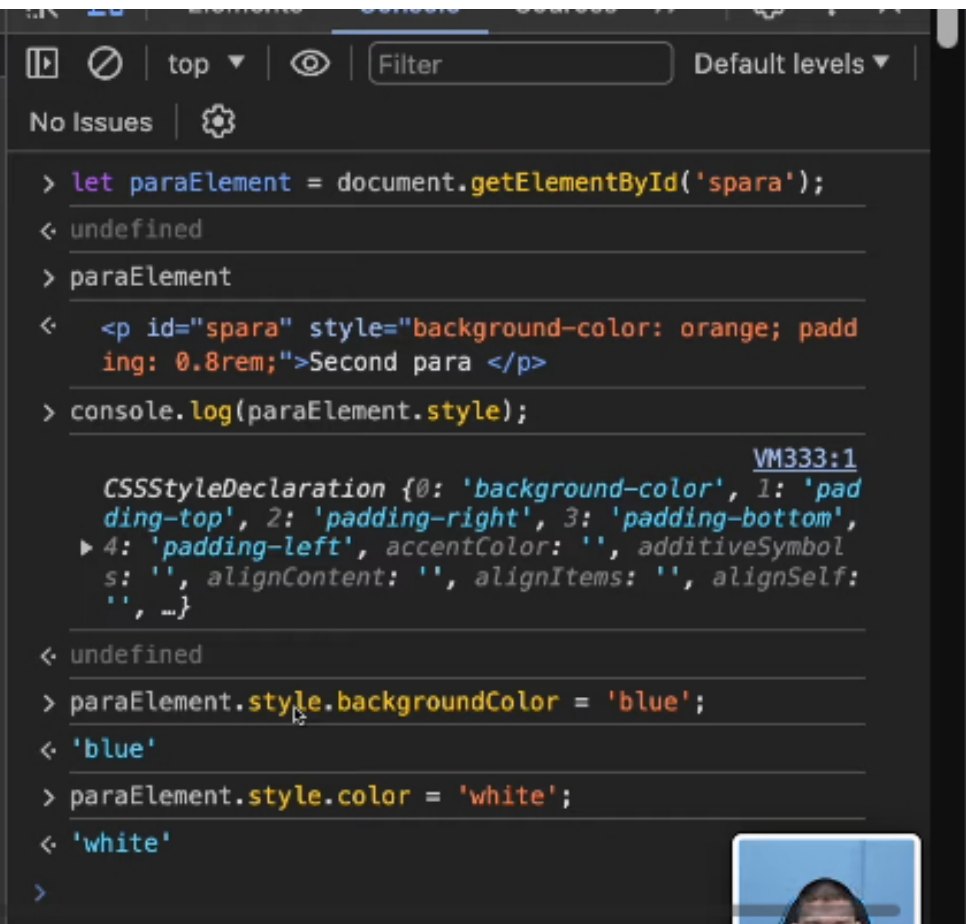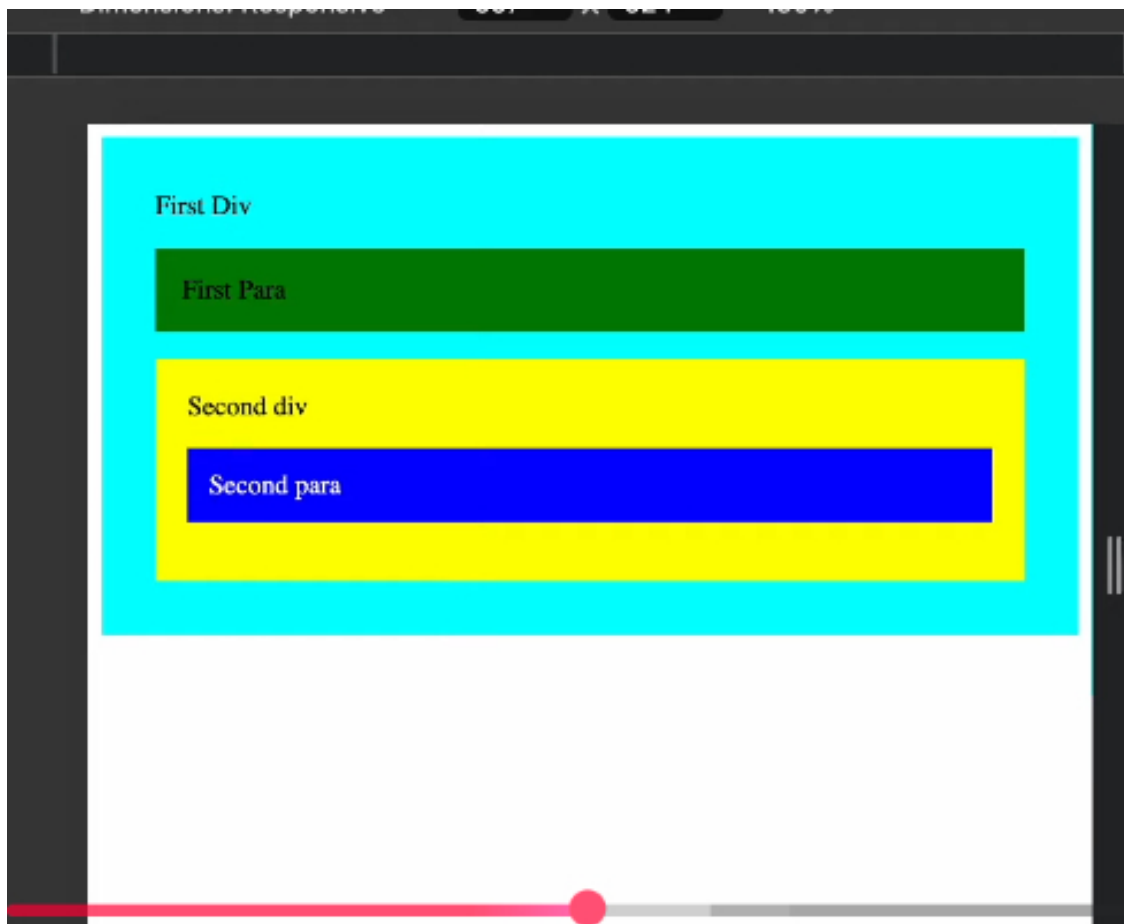

→ Changing CSS → external
inline
internal

→ style → get
→ set

→ cssText → get
→ set

multiple
inline
styles

Dimensions: Responsive 597 X 524 150%

First Div

First Para


Second div

Second para

Elements Console Sources

No Issues


```
> let secondElement = document.getElementById('sdiv');  
< undefined  
> secondElement;  
< <div id="sdiv" style="background-color: yellow; padding: 1.2rem;">...</div>  
> secondElement.cssText;  
< undefined  
> secondElement.style.cssText;  
< 'background-color: yellow; padding: 1.2rem;'>  
> secondElement.style.cssText = "background-color: black; color: white; padding: 0.5rem";  
< 'background-color: black; color: white; padding: 0.5rem'  
>
```

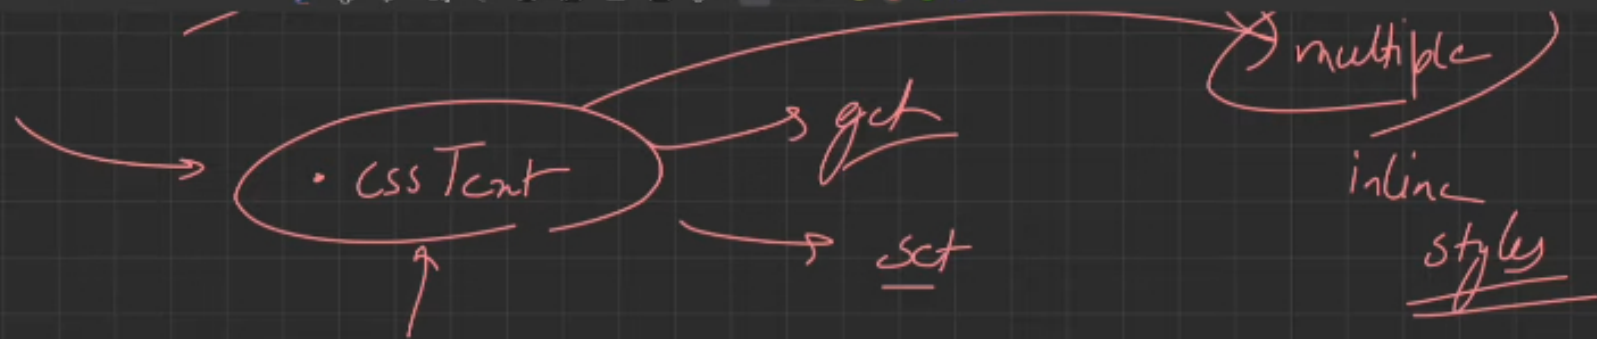→ `setAttribute()`

lecture52 > index.html > html > body > div#fdiv > p#fpara

```
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Document</title>
7 </head>
8 <body>
9
10   <div id="fdiv" style="background-color: aqua; padding: 2rem;">
11     First Div
12
13     <p id="fpara" style="background-color: green; padding: 1rem;">
14       First Para
15     </p>
16
17     <div id="sdiv" style="background-color: yellow; padding: 1.2rem;">
18       Second div
19
20       <p id="spara" style="background-color: orange; padding: 0.8rem;">Second para </p>
21
22     </div>
23   </div>
24
25 </body>
26 </html>
```



Dimensions: Responsive ▾

597

x

524

150% ▾

⋮



Elements

Console

Sources



top ▾



Filter

Default levels ▾

No Issues



First Div

First Para

Second div

Second para

```
> let paraElement = document.getElementById('spara');  
< undefined  
> paraElement  
< <p id="spara" style="background-color: orange; padding: 0.8rem;">Second para </p>  
> console.log(paraElement.style);  
  
VM333:1  
CSSStyleDeclaration {0: 'background-color', 1: 'padding-top', 2: 'padding-right', 3: 'padding-bottom',  
  4: 'padding-left', accentColor: '', additiveSymbols: '', alignContent: '', alignItems: '', alignSelf: '', ...}  
< undefined  
> paraElement.style.backgroundColor = 'blue';  
< 'blue'  
> paraElement.style.color = 'white';  
< 'white'  
>
```


⋮

Console

What's new

x

Issues



Dimensions: Responsive ▾

597 x 524 150% ▾

First Div

First Para

Second div


Second para


Elements Console Sources >> ⚙️ ⋮ ✕

⏏ ⌛ top ▾ 👁 Filter Default levels ▾

No Issues ⚙️


```
> let secondElement = document.getElementById('sdiv');
< undefined
> secondElement;
< ▶<div id="sdiv" style="background-color: yellow; padding: 1.2rem;">⋮</div>
> secondElement.cssText;
< undefined
> secondElement.style.cssText;
< 'background-color: yellow; padding: 1.2rem;'
> secondElement.style.cssText = "background-color: black; color: white; padding: 0.5rem";
< 'background-color: black; color: white; padding: 0.5rem'
>
```



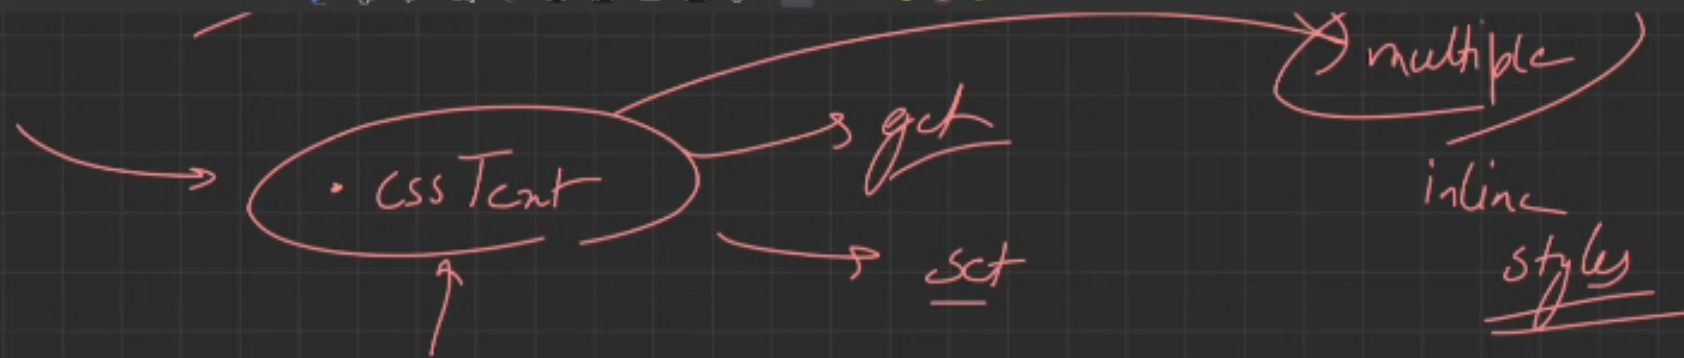

→ • setAttribute () * ^{class →} id



dir → ~~sd~~

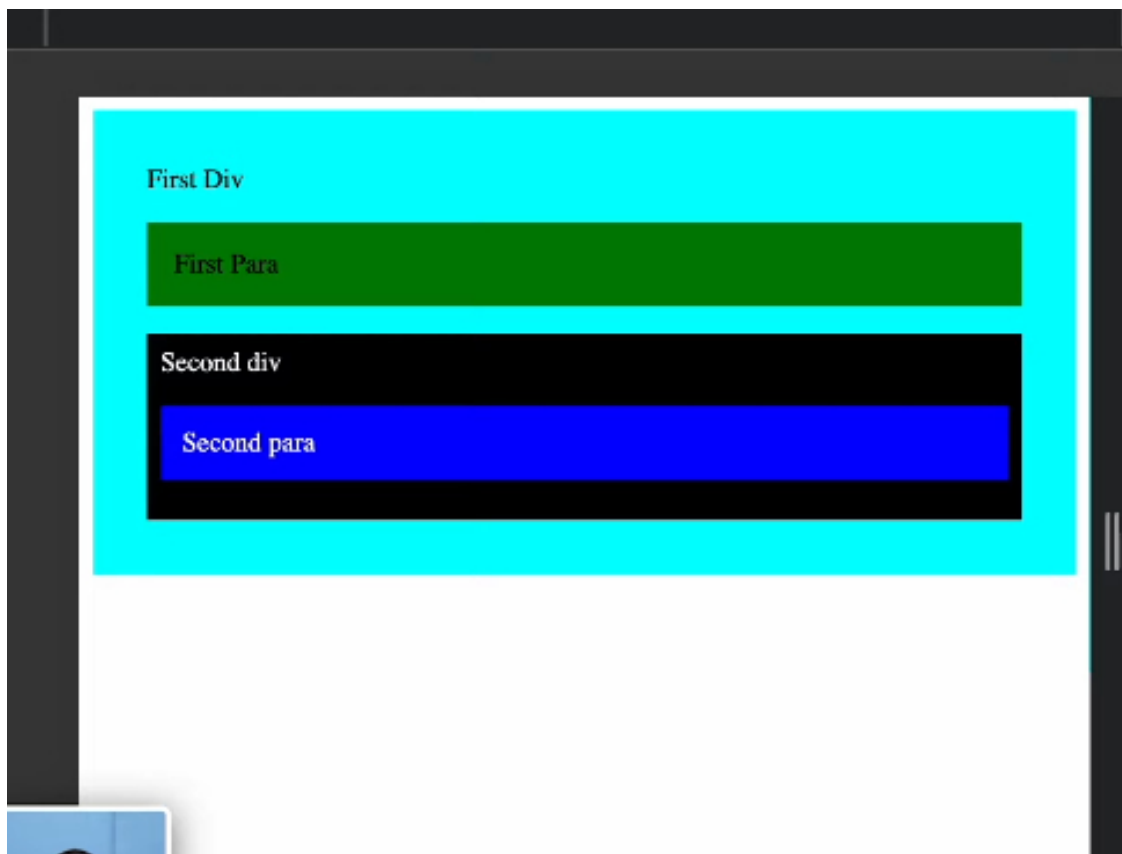

```

[ ] [ ] top [ ] [ ] Filter [ ] Default levels [ ]
No Issues [ ]

> let firstElement = document.querySelector('#fdiv');
< undefined
> firstElement
< ▶ <div id="fdiv" style="background-color: aqua; padding: 2rem;" class="divClass">⌵ </div>
> firstElement.setAttribute('class','divClass');
< undefined
> firstElement
< ▼ <div id="fdiv" style="background-color: aqua; padding: 2rem;" class="divClass">
  " First Div "
  <p id="fpara" style="background-color: green; padding: 1rem;"> First Para </p>
  ▶ <div id="sdiv" style="background-color: black; color: white; padding: 0.5rem;">⌵ </div>
  </div>
> |
```

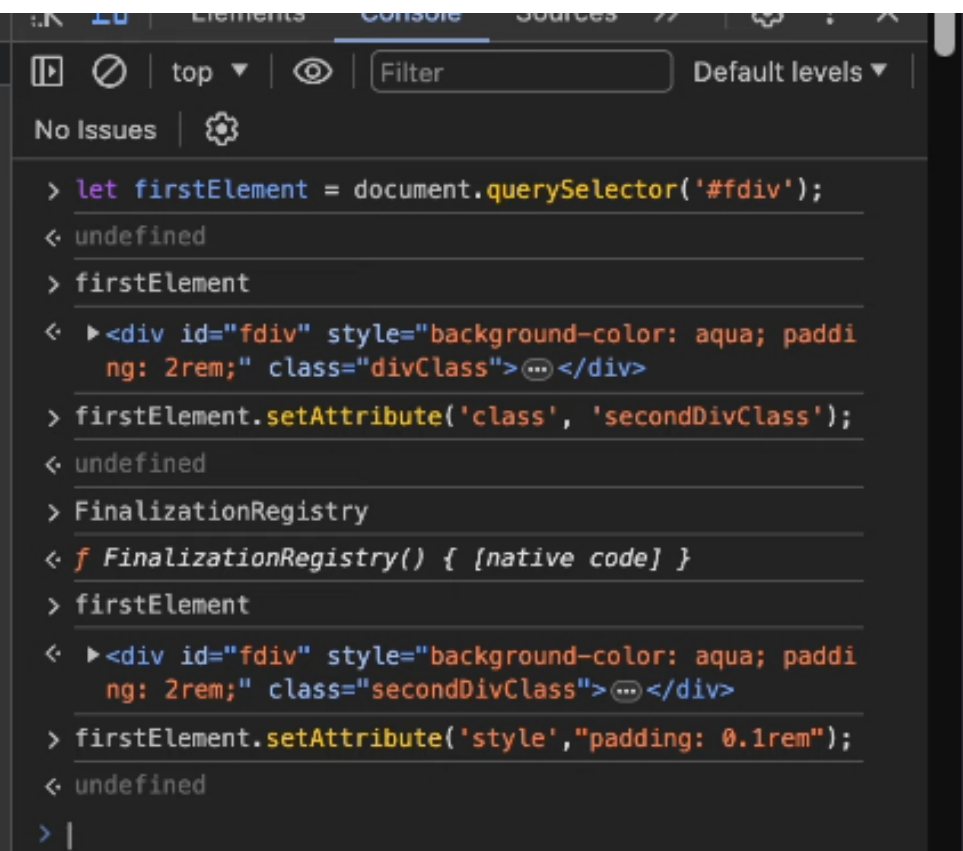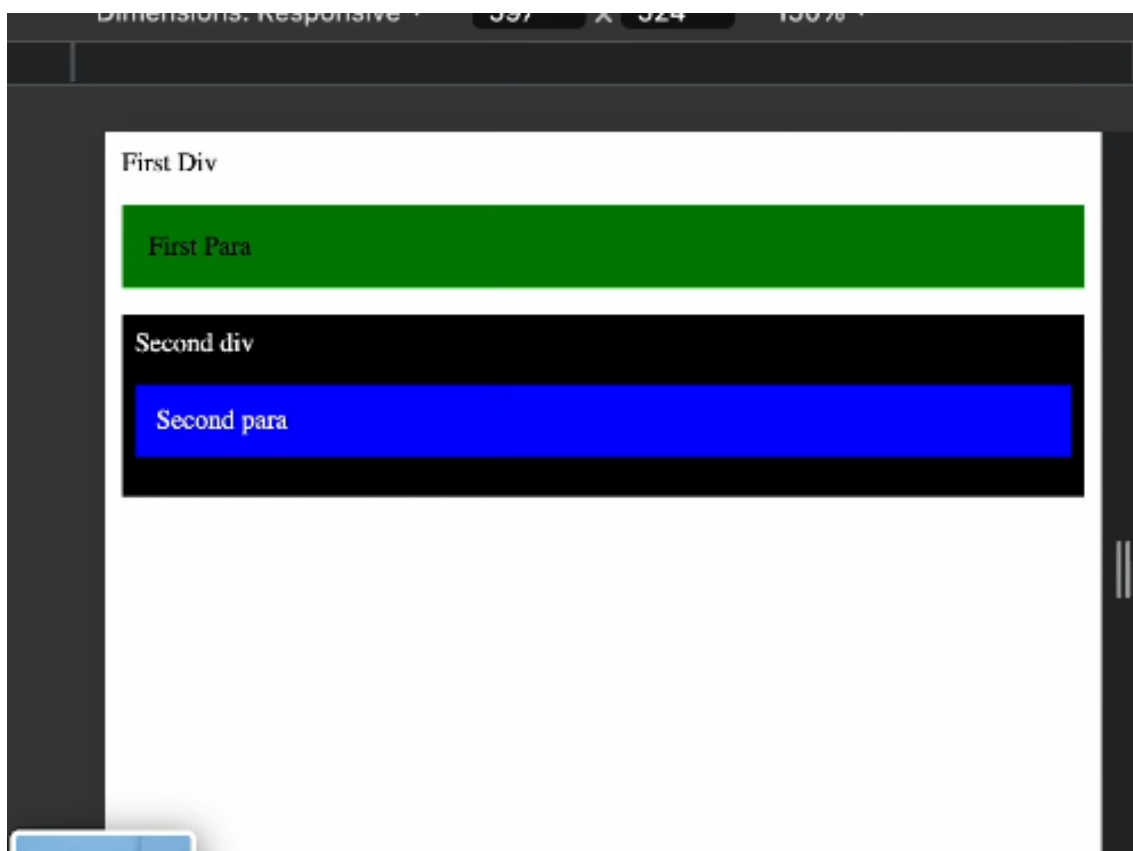

First Div

First Para


Second div


Second para

top Filter Default levels

No Issues

```
> let fpara = $0
< undefined
> fpara
< <p id="fpara" style="background-color: green; padding: 1rem;"> First Para </p>
> fpara.setAttribute('style', 'margin:1rem');
< undefined
> fpara
< <p id="fpara" style="margin:1rem"> First Para </p>
>
```




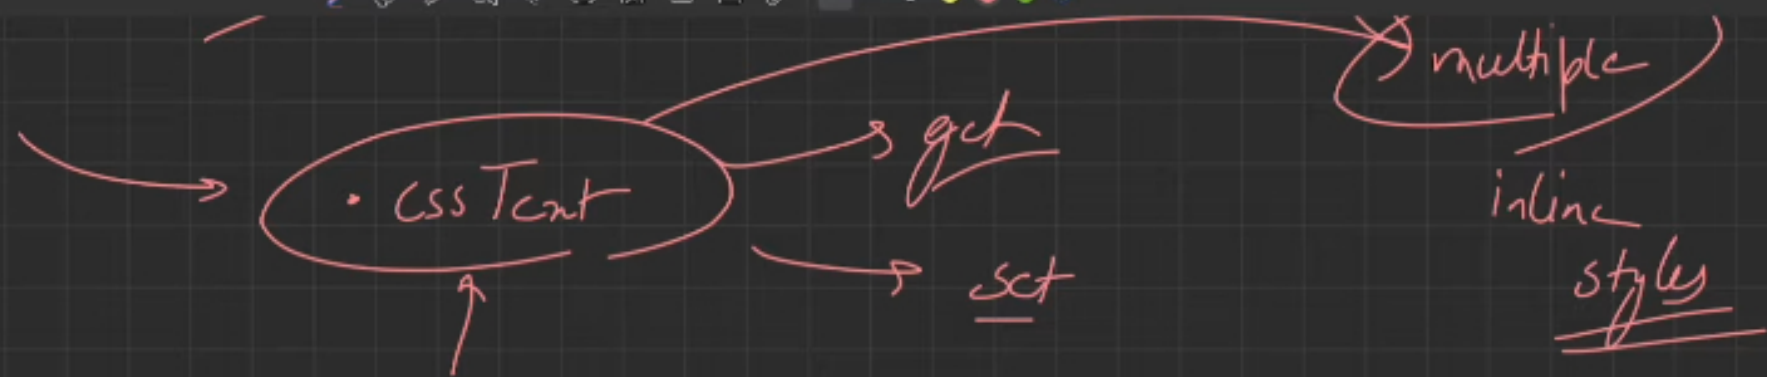

→ `• setAttribute()` ^{class →} `div`

`dir →` ~~`scr`~~

→ `• ClassName →`




First Div

First Para

Second div


Second para



No Issues




```
> let fpara = $0;  
< undefined  
> fpara  
< <p id="fpara" style="background-color: green; padding: 1rem;" class="goku vegeta"> First Para </p>  
> fpara.className  
< 'goku vegeta'  
> fpara.className = "Gohan, Bulbul"  
< 'Gohan, Bulbul'  
> fpara.className  
< 'Gohan, Bulbul'  
> fpara  
< <p id="fpara" style="background-color: green; padding: 1rem;" class="Gohan, Bulbul"> First Para </p>  
> fpara.className = "Gohan Bulbul"  
< 'Gohan Bulbul'  
> |
```

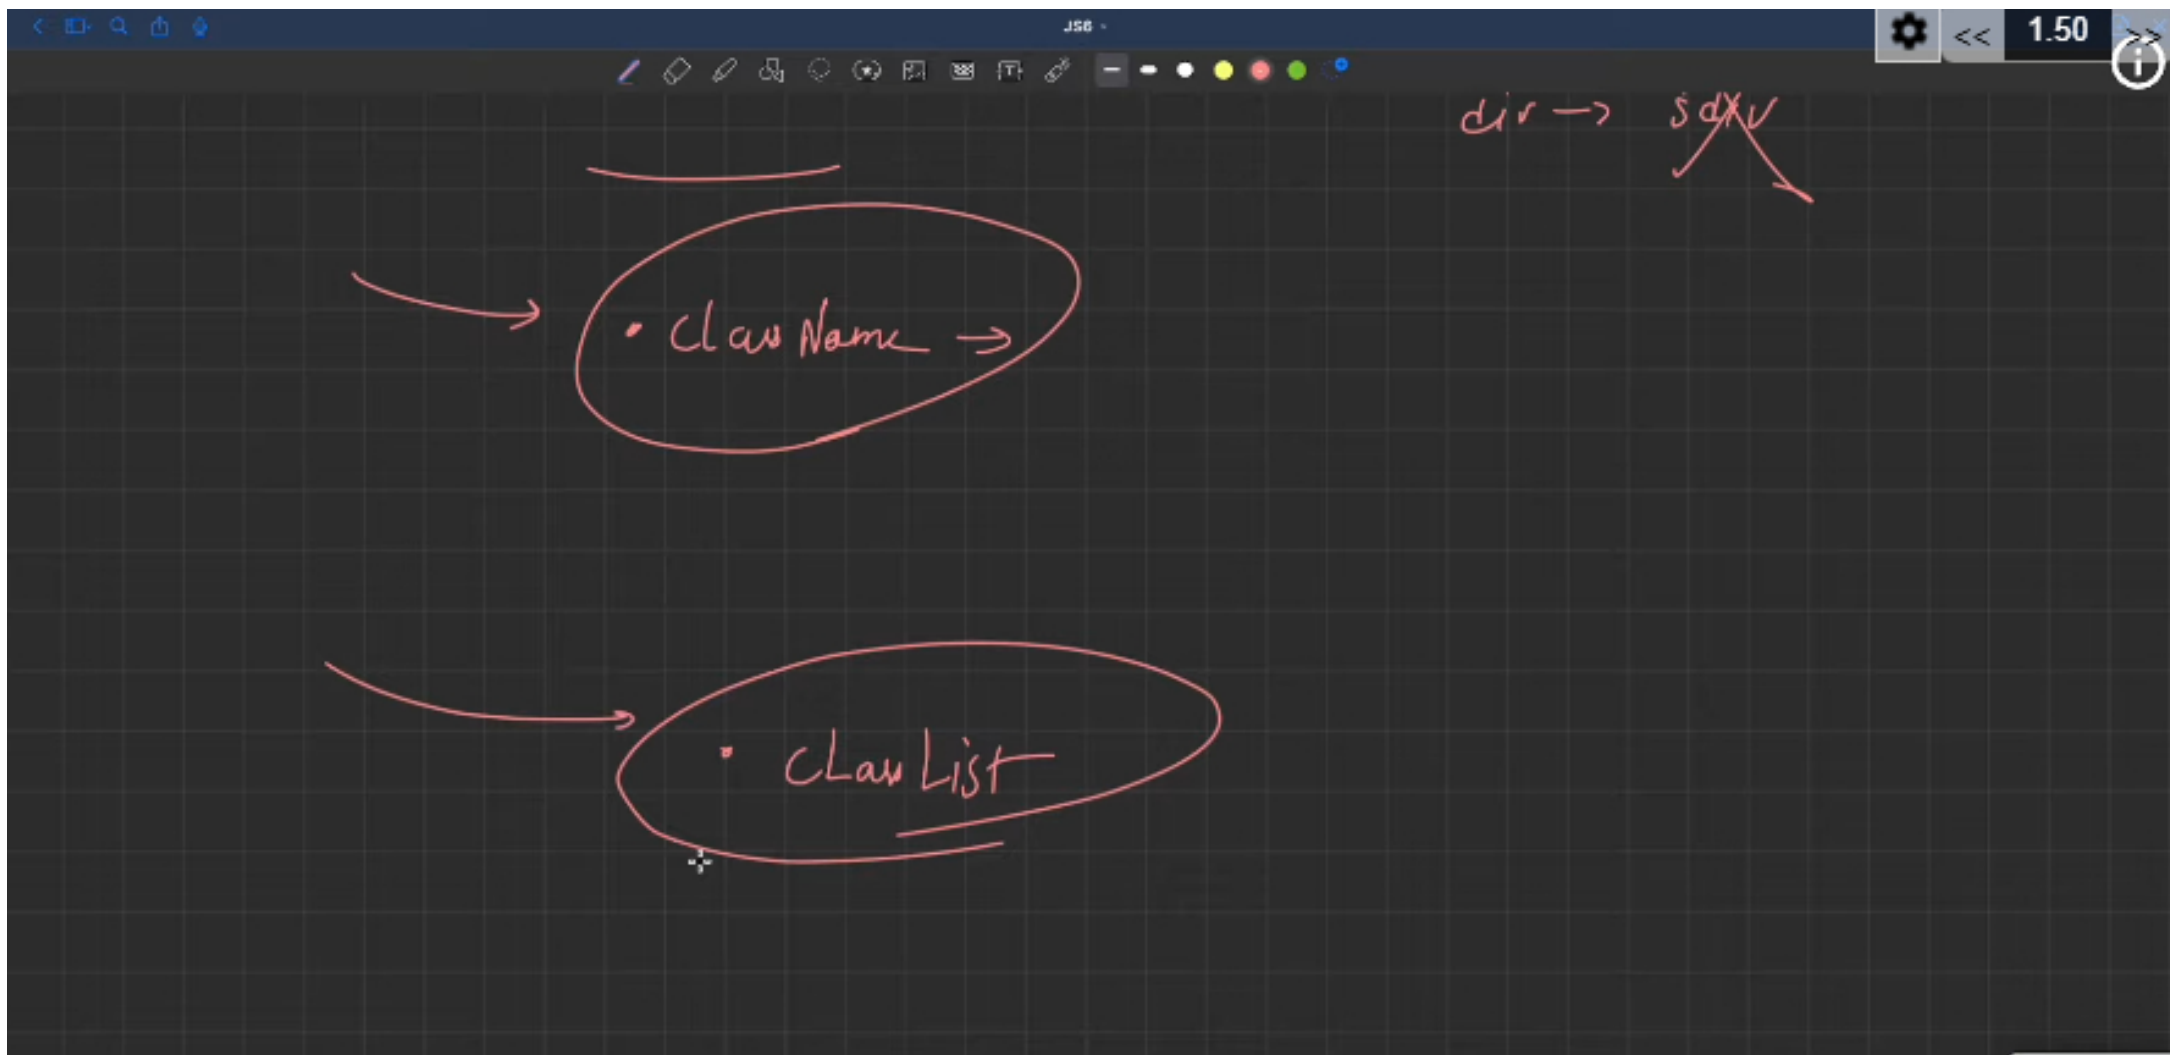

→ • Class Name →

→ • class List → get → array/list
→ add
→ remove
→ toggle





First Div

First Para

Second div

Second para

```
> let fpara = document.querySelector('#fpara');  
< undefined  
> fpara  
< <p id="fpara" style="background-color: green; padding: 1rem;" class="firstClass secondClass"> First  
  Para </p>  
> fpara.classList  
< DOMTokenList(2) ['firstClass', 'secondClass', value: 'firstClass secondClass']  
> fpara.classList.add('thirdClass');  
< undefined  
> fpara.classList  
< DOMTokenList(3) ['firstClass', 'secondClass', 'thirdClass', value: 'firstClass secondClass thirdClass']  
>
```

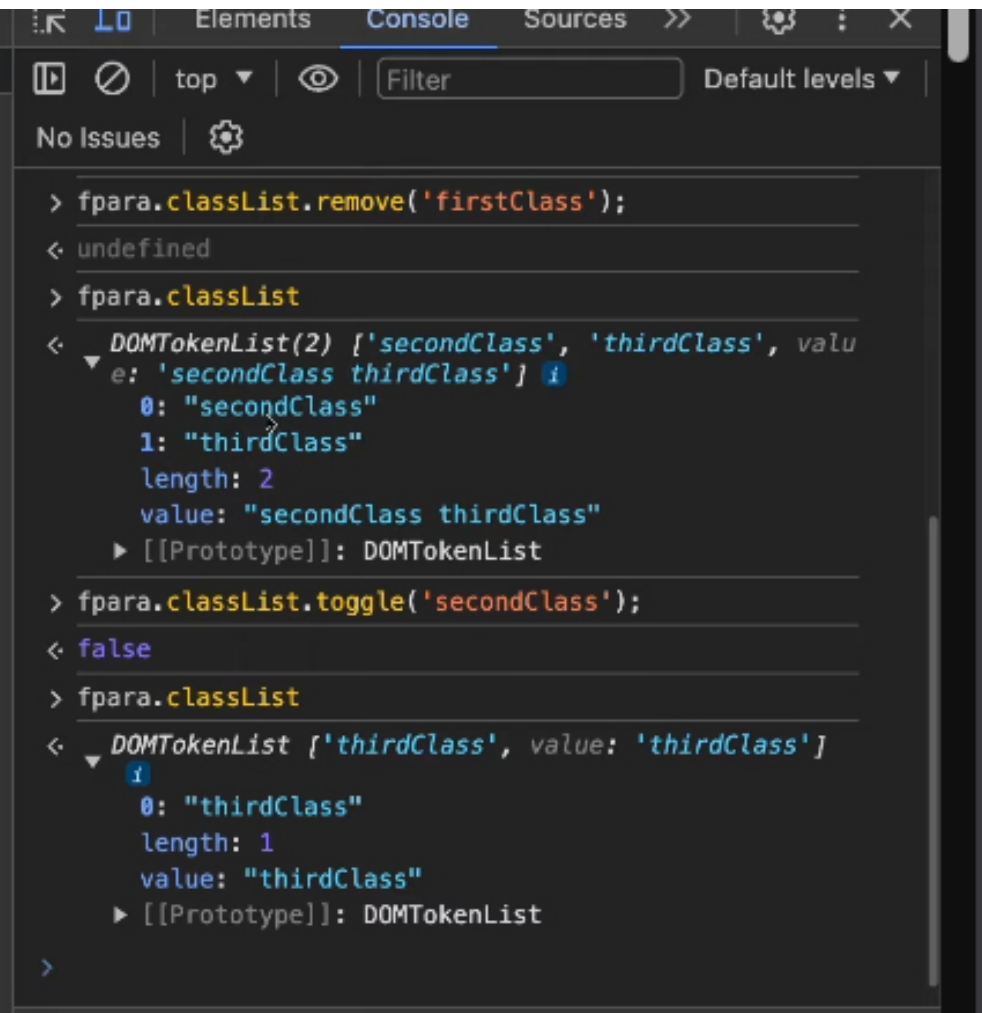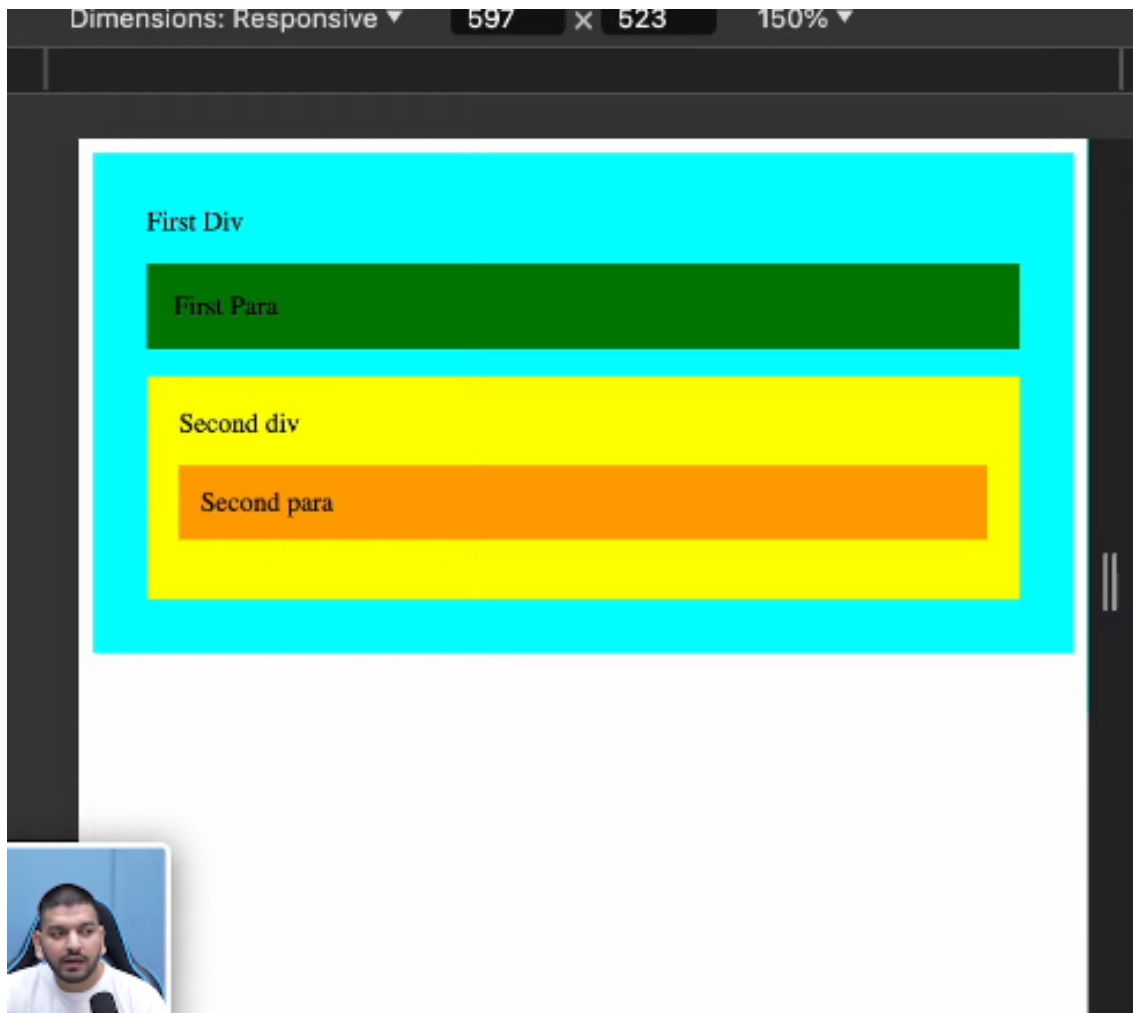

First Div

First Para

Second div

Second para

No Issues

```
    0: "thirdClass"
    length: 1
    value: "thirdClass"
    ► [[Prototype]]: DOMTokenList

> fpara.classList.toggle('secondClass');
< true
> fpara.classList
< DOMTokenList(2) ['thirdClass', 'secondClass', value: 'thirdClass secondClass'] 1
  0: "thirdClass"
  1: "secondClass"
  length: 2
  value: "thirdClass secondClass"
  ► [[Prototype]]: DOMTokenList

> fpara.classList.contains('firstClass');
< false
> fpara.classList.contains('secondClass');
< true
>
```