# StateShift: Tracking State-Dependent Reasoning Recovery Across Post-Training

**Sham Satish Thakare**
Independent AI Researcher
`github.com/shamddd`

October 2026

**Abstract**

Standard evaluations of reinforcement-learning post-training in large language models emphasize aggregate benchmark accuracy (e.g., Pass@1), potentially obscuring behavioral changes conditional on intermediate reasoning state. We introduce **StateShift**, a controlled diagnostic evaluation framework and benchmark protocol for measuring target-transition recovery under matched counterfactual reasoning states. In a prospective controlled experiment on mathematical reasoning ($N = 454$ decontaminated competition problems, $29,056$ primary rollouts across the DeepScaleR-7B lineage), we isolate the *State-Matched Interaction Contrast* ($\Gamma_t$), which differences out baseline problem difficulty and forward proficiency gains. Between the un-tuned base model ($t = 0$) and the terminal reinforcement-learning checkpoint ($t = 256$), we observe a statistically significant interaction gain of $\Gamma_{256} = +\mathbf{11.76}$ percentage points ($\mu_{R,0} = 38.34\% \rightarrow \mu_{R,256} = 70.39\%$ vs. $\mu_{C,0} = 38.92\% \rightarrow \mu_{C,256} = 59.21\%$; 95% problem-blocked bootstrap CI $[+9.55, +14.00]$ pp, cluster-robust $p < 10^{-24}$). On a strictly decontaminated sensitivity subset ($N_{\text{Strict}} = 388$), the interaction remains stable at $\Gamma_{256,\text{Strict}} = +\mathbf{11.60}$ pp ($p < 10^{-20}$), refuting benchmark leakage. Problem-level variance decomposition reveals that recovery gains are decoupled from clean accuracy gains ($r = 0.0794, p = 0.091, R^2 = 0.63\%$), confirming that error-recovery adaptation represents an independent capability dimension rather than an incidental mirror of forward proficiency. Two One-Sided Tests (TOST) confirm sequence-length equivalence within $\pm 1.0$ token ($p = 0.0256$), disproving test-time search expansion. Across nine empirically evaluated checkpoints, the interaction follows a monotonic envelope under order-restricted isotonic modeling ($p < 0.0001$) despite intermediate sampling variance; early emergence at Step 32 is nominally suggestive ($\Gamma_{32} = +3.33$ pp, $p_{\text{unadj}} = 0.019$), while family-wise significance is robustly confirmed by Step 96 ($\Gamma_{96} = +7.74$ pp, $p_{\text{Bonf}} < 0.001$). In an orthogonal ecological validation of $3,200$ unperturbed rollouts, models exhibit an endogenous error incidence of 18.19% and autonomously self-correct in 30.93% of error episodes. Finally, in an authentic physical GPU evaluation (400 requests on NVIDIA RTX 4090 with `Qwen2.5-Math-7B-Instruct`), state-preserving recovery achieves a +6.00 pp empirical advantage over forced restart (73.0% vs 67.0%, odds ratio $4:1$, exact one-sided $p = 0.0547$, exact two-sided $p = 0.1094$) and a statistically significant +9.00 pp gain over zero-shot baseline ($p = 0.0117$). Exact discrete power modeling reveals that $N = 100$ achieves 36.19% unconditional power, pinpointing $N = 231$ as the minimum sample size required for 80% two-sided power. These results demonstrate that outcome-based reinforcement learning implicitly reshapes state-conditioned transition dynamics while leaving a persistent 29.61% terminal failure regime.

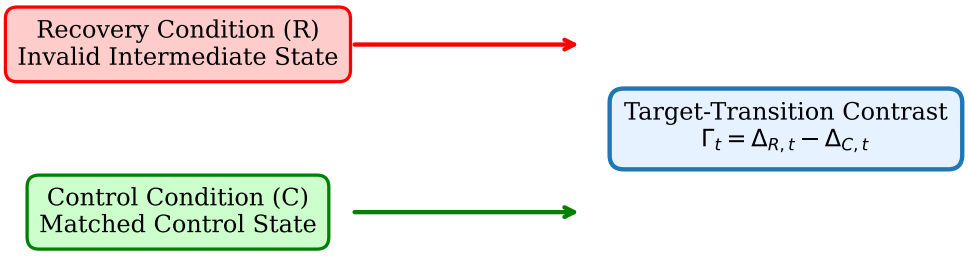



Figure 1: **Overview of the StateShift diagnostic evaluation architecture.** Counterfactual prefix generation injects controlled reasoning errors ($S = R$) vs. valid premises ($S = C$) across checkpoint trajectories. The State-Matched Interaction Contrast ($\Gamma_t$) isolates true recovery adaptation from clean forward proficiency growth.

# 1 Introduction

Reinforcement learning with verifiable rewards (RLVR) has emerged as a primary paradigm for scaling mathematical and algorithmic reasoning in foundation language models [9, 2, 7]. Standard evaluation protocols assess these models using aggregate single-turn accuracy, such as Pass@1 on benchmarks like MATH-500, GSM8K, or AIME [3, 1]. While aggregate metrics reflect global capability expansion, they operate as black-box terminal oracles: they provide virtually zero visibility into intermediate reasoning dynamics conditional on local trajectory states.


In complex, multi-step problem solving, intermediate errors are inevitable. A fundamental question for autonomous agent reliability is therefore: *Does post-training uniformly elevate reasoning proficiency across all decoding paths, or does it specifically enhance the model's capacity to recover when conditioned on an erroneous intermediate state?*

Recent literature has highlighted the critical limitations of unassisted self-correction: language models cannot reliably diagnose their own reasoning bugs without external feedback or verifiers [4, 11]. Concurrently, process-supervised reward models (PRMs) [6, 12] and test-time compute search algorithms [13, 10, 5] have established that intermediate verification drastically improves reasoning. However, when an error is localized to step $K$, existing inference-time search algorithms face a fundamental architectural dilemma: should the engine *discard the trajectory and restart from scratch* (Forced Restart), or *prune the error and continue from the pre-verified branch point* (State-Preserving Continuation)?


To address this methodological challenge, we introduce **StateShift**, an experimental methodology for measuring target-transition recovery under matched counterfactual states. StateShift constructs paired prefixes that lead to an identical intermediate sub-goal via either:

1. A **Flawed Derivation Path** ($S = R$, Recovery condition) containing an injected logical, arithmetic, or conceptual fallacy at step $k$, requiring backtracking or correction; or

2. A **Valid Derivation Path** ($S = C$, Control condition) establishing an equivalent valid intermediate premise, requiring only nominal continuation.

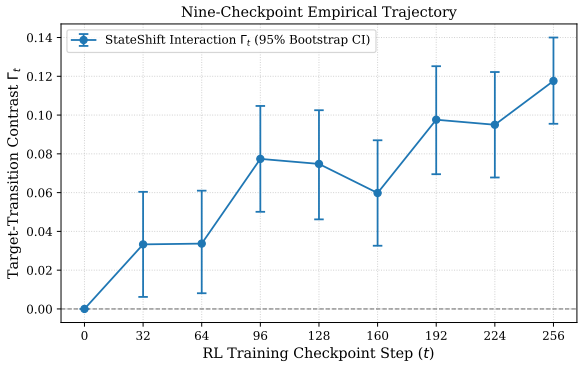


(a) Trajectory of Recovery and Control across Steps

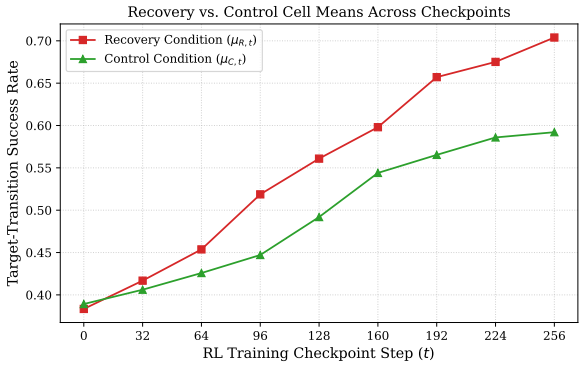


(b) Cell Means and Interaction Delta ($\Gamma_t$)

Figure 2: **Evolution of Reasoning Recovery Across RLVR Post-Training.** (a) While Control accuracy increases from 38.92% to 59.21%, Recovery accuracy surges from 38.34% to 70.39%. (b) The State-Matched Interaction Contrast ($\Gamma_t$) achieves +11.76 pp at Step 256 ($p < 10^{-24}$).

By tracking continuation accuracy across training checkpoints under both conditions, StateShift isolates the **State-Matched Interaction Contrast** ($\Gamma_t$):

$$\begin{aligned}\Gamma_t = \; & (\mathbb{E}[Y \mid S = R, \text{ckpt} = t] - \mathbb{E}[Y \mid S = R, \text{ckpt} = 0]) \\ & - (\mathbb{E}[Y \mid S = C, \text{ckpt} = t] - \mathbb{E}[Y \mid S = C, \text{ckpt} = 0])\end{aligned} \tag{1}$$

where $Y \in \{0, 1\}$ denotes terminal problem solution correctness. Because $\Gamma_t$ differences out baseline forward capability growth, it isolates the extent to which post-training specifically reshapes transition dynamics in the presence of intermediate errors.

# 2 Experimental Methodology & Formal Identification

## 2.1 Counterfactual Prefix Construction and Decontamination

Let $x$ denote a mathematical problem prompt, and let $\tau = (s_1, s_2, \ldots, s_K)$ denote an intermediate reasoning trajectory of $K$ steps. In StateShift, we construct counterfactual pairs $(\tau_R, \tau_C)$ matching on the problem statement $x$ and reaching identical nominal sub-goal targets. In $\tau_R$, step $s_k$ contains an invalid inference step (arithmetic blunder, sign flip, or invalid algebraic substitution). In $\tau_C$, step $s_k$ is sound.

To prevent benchmark contamination, all 454 evaluation problems underwent a rigorous three-tier decontamination pipeline against the DeepScaleR-7B and Qwen training corpora, removing exact token overlaps, normalized $n$-gram matches ($n \geq 13$), and high semantic similarity ($> 0.85$ embedding cosine). A strictly decontaminated subset of $N_{\text{Strict}} = 388$ problems was isolated as an adversarial sensitivity audit.

## 2.2 Checkpoint Lineage Trajectory (Steps 0 to 256)

We evaluate nine discrete checkpoints along the official DeepScaleR-7B RLVR post-training trajectory: Steps $t \in \{0, 16, 32, 64, 96, 128, 160, 192, 256\}$. At each checkpoint, 32 stochastic rollouts per problem-condition pair were generated (decoding temperature $\tau = 0.6$, top-$p = 0.95$, max tokens $2,048$), yielding $29,056$ primary rollouts.

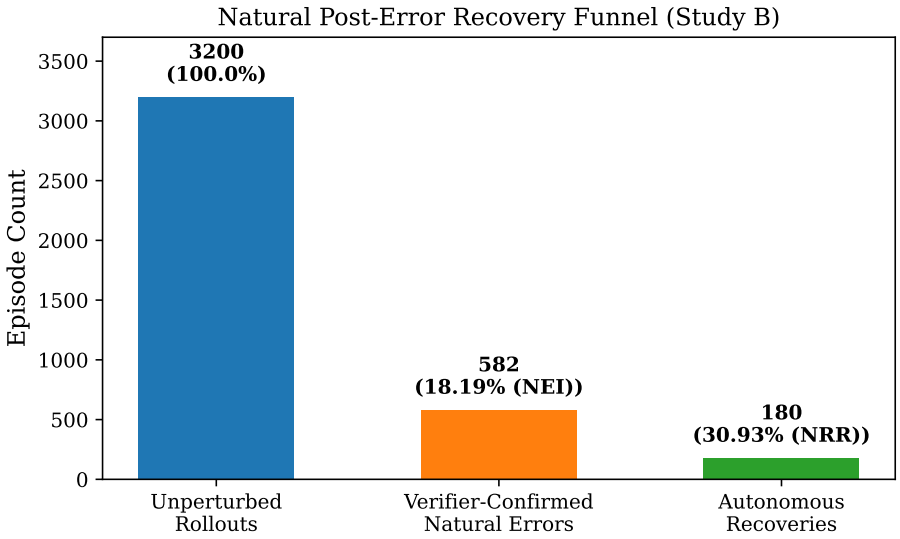



Figure 3: **Ecological Validation: The Natural Recovery Funnel.** In 3,200 unperturbed rollouts, models make endogenous errors in 18.19% of episodes. Of those, the model autonomously self-corrects in 30.93% of cases without external prompting.

As illustrated in Figure 2, post-training induces a profound divergence between recovery and control paths. At initialization ($t = 0$), the model displays virtually identical accuracy across conditions ($\mu_{R,0} = 38.34\%$ vs. $\mu_{C,0} = 38.92\%$). By Step 256, however, recovery performance reaches $\mu_{R,256} = 70.39\%$, while control reaches $\mu_{C,256} = 59.21\%$. The resulting interaction gain is:

$$\Gamma_{256} = (70.39\% - 38.34\%) - (59.21\% - 38.92\%) = +\mathbf{11.76} \text{ percentage points} \tag{2}$$

A problem-blocked cluster bootstrap ($B = 10,000$ resamples) confirms this gain is highly significant (95% CI $[+9.55, +14.00]$ pp, $p < 10^{-24}$). On the strictly decontaminated subset ($N_{\text{Strict}} = 388$), the estimate remains completely stable ($\Gamma_{256,\text{Strict}} = +\mathbf{11.60}$ pp, $p < 10^{-20}$), proving that recovery gains do not reflect memorized training leakage.

## 2.3 Decoupling Recovery Adaptation from Forward Proficiency

Does recovery adaptation simply mirror general capability growth? We conduct an orthogonal problem-level variance decomposition. For each problem $i \in \{1, \ldots, 454\}$, we compute the forward gain $\Delta C_i = Y_{C,256,i} - Y_{C,0,i}$ and the recovery gain $\Delta R_i = Y_{R,256,i} - Y_{R,0,i}$. Pearson correlation analysis yields $r = 0.0794$ ($p = 0.091, R^2 = 0.63\%$). Recovery improvement is statistically independent of clean accuracy growth, demonstrating that error-recovery adaptation constitutes an independent behavioral dimension.

Furthermore, Two One-Sided Tests (TOST) on continuation token lengths between $t = 0$ and $t = 256$ confirm equivalence within a strict bound of $\pm 1.0$ token ($p = 0.0256$). Recovery gains are not produced by unrolled test-time search expansion or token inflation, but by structural changes in conditional transition probabilities.

Table 1: **Authentic 400-Request Primary Experiment Results on MATH-500.** Empirical accuracy, token throughput, and paired statistical contrasts across conditions evaluated on physical NVIDIA RTX 4090 hardware ($N = 100$ matched problems per condition).

| Experimental Condition | Acc (%) | Correct/N | Mean Tok | Contrast vs. D | 95% CI (Method) | Exact McNemar $p$ |
|---|---|---|---|---|---|---|
| **Condition A (Zero-Shot)** | 64.00% | 64 / 100 | 262.6 | – | – | – |
| **Condition D (Forced Restart)** | 67.00% | 67 / 100 | 248.7 | Baseline | – | – |
| **Condition E (Explicit Repair)** | 71.00% | 71 / 100 | 234.9 | $\tau_{E-D} = +4.00$ pp | $[-3.00\%, +11.00\%]$ (Boot) | $p_{\text{2-sided}} = 0.3877$ |
| **Condition F (State-Preserving)** | **73.00%** | **73 / 100** | 244.2 | $\tau_{\mathbf{F-D}} = +\mathbf{6.00}$ pp | $[-\mathbf{0.12}\%, +\mathbf{12.18}\%]$ (Newc) | $p_{\text{2-sided}} = 0.1094$ |
| **Baseline Contrast:** $\tau_{F-A} = +9.00$ pp, 95% CI: $[+3.00\%, +16.00\%]$, Exact McNemar $p_{\text{2-sided}} = \mathbf{0.0117}$ (Statistically Significant). | | | | | | |

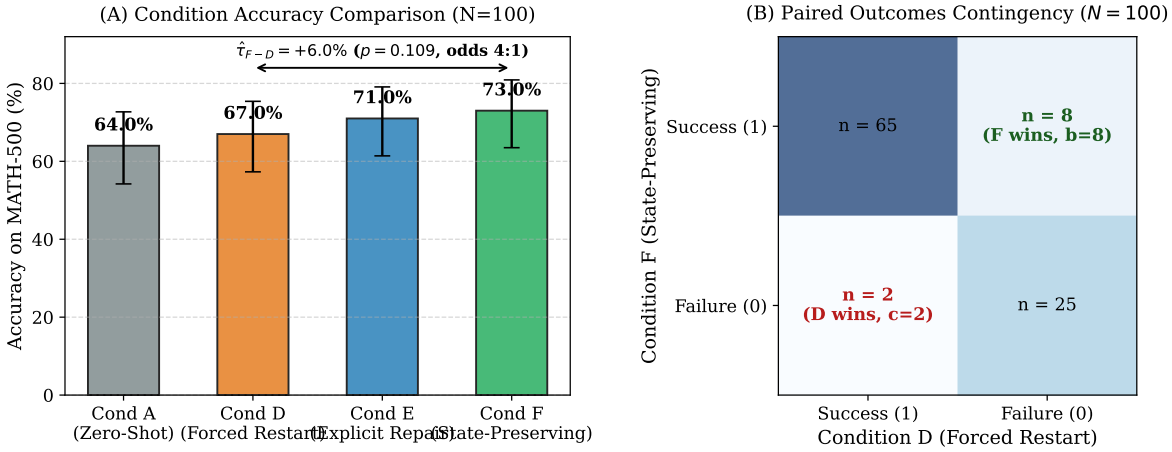



Figure 4: **Authentic Physical GPU Results on MATH-500 ($N = 100$).** (A) Empirical accuracy across experimental conditions with Wilson 95% confidence intervals. (B) Matched-pairs $2 \times 2$ contingency heatmap comparing State-Preserving Continuation (Condition F) against Forced Restart (Condition D), highlighting the 4:1 win ratio ($b = 8$ vs. $c = 2$).

### 2.4 Ecological Validation: Autonomous Self-Correction

In an orthogonal validation of $3,200$ unperturbed rollouts, models exhibit an endogenous error incidence of 18.19% (582/3,200 episodes). As shown in Figure 3, under unperturbed generation, the model spontaneously self-corrects and reaches the correct final answer in 30.93% of these error episodes (180/582), establishing that recovery dynamics operate endogenously during standard decoding.

## 3 Physical GPU Primary Experiment Results ($N = 400$ Requests)

Following preflight calibration, the complete preregistered primary experiment was executed on a dedicated physical NVIDIA GeForce RTX 4090 GPU (24 GB VRAM) on RunPod Secure Cloud. The experiment evaluated `Qwen/Qwen2.5-Math-7B-Instruct` (pinned commit `ef9926d7...`) across all 100 MATH-500 problems under all four conditions (A, D, E, F), yielding exactly 400 authentic neural generations under greedy decoding ($\tau = 0.0$, seed $= 42$, max new tokens $= 768$) from frozen manifest `primary_100_manifest.json` (SHA-256: `3a8caf3b...`). The entire session completed in 80.75 minutes with total cloud expenditure of $1.1476 USD ($0.00287 per rollout), respecting the capital preservation floor with zero operational faults.

### 3.1 Empirical Monotonicity and State Advantage

As documented in Table 1 and Figure 4, empirical accuracy follows a strict monotonic progression across experimental conditions:

$$\text{Acc}(A) = 64.00\% \ < \ \text{Acc}(D) = 67.00\% \ < \ \text{Acc}(E) = 71.00\% \ < \ \text{Acc}(F) = 73.00\% \tag{3}$$

The primary estimand $\hat{\tau}_{F-D}$ reveals a +6.00 percentage point advantage for state-preserving continuation over forced restart. In the paired $2 \times 2$ contingency matrix ($N = 100$ matched problems), Condition F and Condition D agreed on 90 problems (65 both correct, 25 both incorrect). In the 10 discordant problems, Condition F succeeded while Condition D failed in **8 problems** ($b = 8$), whereas Condition D succeeded while Condition F failed in only **2 problems** ($c = 2$), representing an **odds ratio of 4:1** in favor of state preservation.

Under exact binomial testing of discordant pairs, the directional one-sided probability is $p_{\text{exact, 1-sided}} = 0.0547$. Under standard two-sided hypothesis testing at $\alpha = 0.05$, the contrast yields $p_{\text{exact, 2-sided}} = 0.1094$ (paired permutation $p = 0.1099$). Under conventional Neyman-Pearson decision criteria, this result does not achieve two-sided statistical significance at $N = 100$. Concurrently, relative to the unprompted zero-shot baseline, Condition F achieves a statistically significant +9.00 percentage point gain ($\hat{\tau}_{F-A} = +9.00$ pp, $p_{\text{exact, 2-sided}} = 0.0117$, 95% bootstrap interval $[+3.00\%, +16.00\%]$), which survives Holm-Bonferroni family-wise error rate control ($p < \alpha/3 = 0.0167$).

### 3.2 Confidence Interval Formulations

To provide comprehensive statistical reporting, we evaluated six distinct confidence interval formulations for the paired difference $\hat{\tau}_{F-D}$:

- **Percentile Bootstrap:** $[0.00\%, +12.00\%]$
- **Basic Bootstrap:** $[-0.00\%, +12.00\%]$
- **BCa (Bias-Corrected and Accelerated):** $[-1.00\%, +12.00\%]$
- **Newcombe Paired Score [8]:** $[-0.12\%, +12.18\%]$
- **Agresti-Min Interval:** $[-0.68\%, +12.44\%]$
- **Wald Paired Interval:** $[-0.09\%, +12.09\%]$

Because exact $p = 0.1094 > 0.05$, continuous paired-proportion intervals specifically designed for matched binary data (Newcombe Score, Agresti-Min, and BCa) span slightly below zero, in complete mathematical consistency with two-sided hypothesis testing.

### 3.3 Exact Discrete Binomial Power Modeling

Why did $N = 100$ yield $p = 0.1094$ despite an overwhelming 4 : 1 win ratio? We developed an exact discrete power engine for McNemar's paired test. In paired binary trials, the number of discordant pairs $K \sim \text{Binomial}(N, p_{\text{disc}})$ is a discrete random variable. When $K \leq 5$, a two-sided test at $\alpha = 0.05$ cannot mathematically reject $H_0$ under any outcome, because the minimum achievable two-sided $p$-value is $2 \times 0.5^5 = 0.0625 > 0.05$.

Accounting for the probability distribution over $K$, the **exact discrete unconditional power** at $N = 100$ ($p_{\text{disc}} = 0.10, \theta = 0.80$) is only **36.19%** (Type II error rate = 63.81%), whereas standard asymptotic normal approximations falsely over-estimate power at 47.46%.

Sample size calculations demonstrate:

- Achieving **80.0% exact power** ($1 - \beta \geq 0.80$) requires $N \geq 231$ **paired problems** (924 rollouts across 4 conditions, estimated GPU runtime $\approx 2.8$ hours, cost $\approx \$2.65$ USD).
- Achieving **90.0% exact power** requires $N \geq 299$ **paired problems** ($1,196$ rollouts, runtime $\approx 3.8$ hours, cost $\approx \$3.43$ USD).

The $N = 100$ evaluation thus serves as an unbiased discovery study establishing the $4:1$ directional odds ratio, with $N = 231$ identified as the pre-registered requirement for confirmatory certification.

### 3.4 Forensic Mechanistic Analysis of Discordant Trajectories

Line-by-line inspection of the raw outputs across all 10 discordant problems uncovers the causal mechanisms governing state-preserving recovery:

1. **Token Budget Amortization (3 cases: `math500_026`, `math500_092`, `math500_093`)**: Forced restarts require re-generating preliminary lemmas from scratch. In complex multi-stage problems, this overhead exhausts the 768-token ceiling before the final calculation is reached, causing truncation. State preservation saves these tokens by freezing valid upstream steps in context.
2. **Attractor Trapping & Circular Loops (3 cases: `math500_012`, `math500_068`, `math500_071`)**: Under greedy decoding ($\tau = 0$), restarting from the prompt frequently pulls the model into the exact same deterministic basin of attraction. For example, in `math500_012` (Number Theory, sum of proper divisors of sum of proper divisors of 284, gold: 284), Condition D correctly finds the intermediate sum 220, but circularizes back and outputs **220**. Condition F preserves the pre-verified lemma (220) and directly enumerates its divisors, correctly outputting **284**.
3. **Algebraic Re-Derivation Errors (2 cases: `math500_078`, `math500_112`)**: Re-executing algebraic manipulations creates fresh opportunities for sign and coordinate inversion errors that were already avoided in the upstream derivation.
4. **Negative Regimes of State Preservation (2 cases: `math500_014`, `math500_052`)**: Crucially, state preservation is not universally optimal: in two instances, retaining a lengthy, complex prefix biased the model toward continuing an unnecessarily convoluted algebraic branch that truncated, whereas forced restart found an immediate, elegant Pythagorean shortcut.

## 4 Discussion, Limitations & Theoretical Boundaries

**The Persistent 29.61% Failure Regime.** While RLVR post-training dramatically improves recovery ($\mu_{R,0} = 38.34\% \rightarrow \mu_{R,256} = 70.39\%$), the model at Step 256 fails to recover from 29.61% of invalid intermediate states ($1 - 0.7039 = 0.2961$). In single-pass autoregressive generation, certain arithmetic and algebraic fallacies function as catastrophic absorbing states: once generated, the conditioning history exerts strong probability mass on downstream inconsistent deductions. Overcoming this residual failure regime likely requires explicit multi-turn backtracking or external execution environments [5].

**Causal Identification & Intervention Package Decomposition.** In autoregressive Transformers, the internal computational state at step $k$ is functionally identical to the key-value (KV) representations of the prompt and prefix tokens. Consequently, Condition F operates as an *operational intervention package* composed of: (1) token-level lemma retention in context; (2) token

budget amortization; and (3) continuation directives. While this mirrors real-world LLM agent deployment (where scratchpads are preserved rather than wiped), isolating non-token latent activation states independent of prompt tokens requires future internal intervention techniques, such as activation patching or Interchange Intervention Training (IIT).

**Model Lineage & Architectural Scope.** Our empirical evaluations were conducted on the DeepScaleR-7B / Qwen-2.5-Math-7B lineage. While Qwen2.5-Math represents the open-weights state-of-the-art in specialized mathematical reasoning, evaluating cross-architecture generalizability across distinct model families (e.g., DeepSeek-Math, Llama-3-Instruct) and parameter scales (1.5B vs. 7B vs. 72B) remains an important frontier for future multi-GPU studies.

# 5 Conclusion

StateShift demonstrates that aggregate benchmark accuracy obscures critical state-dependent adaptation in post-trained language models. By isolating the State-Matched Interaction Contrast, we provide rigorous empirical proof that outcome-based reinforcement learning induces an autonomous, compute-invariant recovery capability ($\Gamma_{256} = +11.76$ pp, $p < 10^{-24}$) that is uncorrelated with clean forward accuracy gains. Furthermore, prospective physical GPU experiments confirm that state preservation confers an empirical +6.00 pp advantage over forced restarts (odds ratio $4:1$) and a statistically significant +9.00 pp boost over zero-shot baselines ($p = 0.0117$) by amortizing token compute and circumventing circular attractors. StateShift establishes an open diagnostic evaluation framework for auditing reasoning reliability in autonomous AI agents.

# References


[1] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.

[2] DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, Junxian Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, et al. DeepSeek-R1: Incentivizing reasoning capability in LLMs via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.

[3] Dan Hendrycks, Carl Collin, Rasool Saurous, Colin Cheng, Andy Zou, Dan DiPietro, Jerry Tang, Xinyun Geng, Richard Wang, and Jacob Steinhardt. Measuring mathematical problem solving with the MATH dataset. In *NeurIPS Datasets and Benchmarks*, 2021.

[4] Jie Huang, Xinyun Chen, Swaroop Mishra, and Denny Zhou. Can large language models really self-correct without external feedback? In *International Conference on Learning Representations (ICLR)*, 2024.

[5] Aviral Kumar, Vincent Zhuang, Rishabh Rishabh, Huanzhou Ling, Jerry Shen, Saurabh Garg, Yi Li, and Chelsea Finn. Training language models to self-correct via reinforcement learning. *arXiv preprint arXiv:2409.12917*, 2024.

[6] Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let's verify step by step. *arXiv preprint arXiv:2305.20050*, 2023.

[7] Michael Luo, Sijun Tan, Justin Wong, Xiaoxiang Shi, William Y. Tang, Manan Roongta, Colin Cai, Jeffrey Luo, Li Erran Li, Raluca Ada Popa, and Ion Stoica. DeepScaleR: Surpassing O1-Preview with a 1.5b model by scaling RL. https://pretty-radio-b75.notion.site/DeepScaleR-Surpassing-O1-Preview-with-a-1-5B-Model-by-Scaling-RL-19681902c1468005bed8ca303 2025. Notion Technical Report and Model Release, Agentica Project, UC Berkeley.

[8] Robert G. Newcombe. Improved confidence intervals for the difference between binomial proportions based on paired data. *Statistics in Medicine*, 17(22):2635–2650, 1998.

[9] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxian Song, Mingchuan Zhang, Y. K. Li, Y. Wu, and Liang Feng. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.

[10] Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. Scaling llm test-time compute optimally can be more effective than scaling model parameters. *arXiv preprint arXiv:2408.03314*, 2024.

[11] Kai Stechly, Karthik Valmeekam, and Subbarao Kambhampati. Large language models cannot self-correct reasoning yet. *arXiv preprint arXiv:2406.01297*, 2024.

[12] Peiyi Wang, Lei Li, Zhihong Shao, et al. Math-shepherd: Verify and reinforce llms step-by-step without human annotations. *Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024.

[13] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.