

Finding the Perfect Blend of Renewables for UK Manufacturers

A practical guide to cost certainty, resilience and credible carbon reductions through a commercial Power Purchase Agreement



SABER
RENEWABLE ENERGY



Contents

- 01. Executive summary
- 02. The energy landscape for UK manufacturing
- 03. Sector signals, where the blended model fits
- 04. Sector reference matrix
- 05. Commercial PPAs, explained
- 06. The blended stack
- 07. Bridge to Grid
- 08. Hydrogen-ready CHP and the moral compass
- 09. Delivery, the Saber approach
- 10. Working with Saber, next steps
- 11. Appendices

How UK Manufacturers are Locking in Cost Certainty

UK manufacturers face energy decisions that no longer fit inside a procurement cycle. Wholesale prices move on geopolitics. Non-commodity charges climb every year. Grid connection queues stretch into multi-year horizons. Customers, investors and ratings agencies expect measurable decarbonisation, not statements of intent.

A fixed retail tariff is not the answer. It locks in a unit rate for two or three years and exposes everything else, the non-commodity stack, the renewal cliff, the carbon position. A single-technology solar quote is not the answer either. Solar covers daytime hours and a fraction of total demand, leaving night, evening and thermal load untouched.

Saber's commercial Power Purchase Agreement brings the right mix of on-site technologies under a single agreement, shaped around the client's primary objectives, cost certainty, decarbonisation, or both. Saber funds, designs, installs, operates and maintains the assets. The client pays for metered output at a pre-agreed rate. Performance sits with Saber.

Combined heat and power (CHP), supplied through Saber's partnership with 2G Energy, is the workhorse of the model. CHP technology achieves a minimum of 92% total system efficiency by capturing waste heat for direct use on site, whilst also having the ability to operate on several fuels, natural gas, biogas and hydrogen. That gives manufacturers the rare combination of immediate cost reduction and a defensible long-term decarbonisation pathway, without stranding capital in technology that the energy transition may leave behind.

For sites awaiting grid connection, Saber's Bridge to Grid provides day-one power through a PPA-enabled solution ahead of grid connection, allowing development to proceed in line with the client's scheduled programme rather than being dictated by grid reinforcement queues.

This paper sets out how the model works in practice. It explains the economics of a solution including solar PV, CHP and battery storage being combined into an ideal blend. It maps the playbook across the major UK manufacturing sub-sectors and explains how Saber delivers in a constrained grid environment, evidenced by live data from the Saber Intelligence Platform.

The conclusion is consistent across scales. For sites with simultaneous heat and power demand, multi-shift operation, and a roof or land footprint capable of supporting on-site generation, a blended Saber PPA delivers a lower total energy cost than the prevailing fixed retail tariff, and resilience that the grid alone cannot offer.

The Energy Landscape for UK Manufacturing

UK manufacturing accounts for roughly 17 per cent of national energy consumption and a comparable share of industrial emissions. For energy-intensive sub-sectors, energy now sits in the top three operating cost lines on most boards. Three structural forces are reshaping every energy decision.

Wholesale volatility and rising non-commodity charges


The unit rate is no longer the largest line on a manufacturing energy bill. Distribution Use of System, Transmission Network Use of System, Balancing Services Use of System, the Climate Change Levy and Capacity Market charges together now account for the majority of the total cost on most industrial sites. These elements are largely outside the buyer's control under a conventional supply contract. They are passed through, indexed, and reviewed annually by the regulator. Network

buying not just a lower rate today, but insulation against fifteen years of cost drift.

DNO constraints and grid connection queues

G99 application time lines have lengthened to multiple years in many regions. The Electricity System Operator's transmission queue and the regional DNO queues have become a structural barrier to UK industrial growth, not a technical hurdle to be solved by application. Sites that depend on grid reinforcement face delivery horizons that no commercial planner can underwrite.

Saber's approach prioritises behind-the-meter generation and private-wire configurations that reduce or remove the export requirement, allowing delivery in months rather than years. Where new sites are awaiting connection, Saber Bridge to Grid (Chapter 6) provides day-one power ahead of grid energisation.

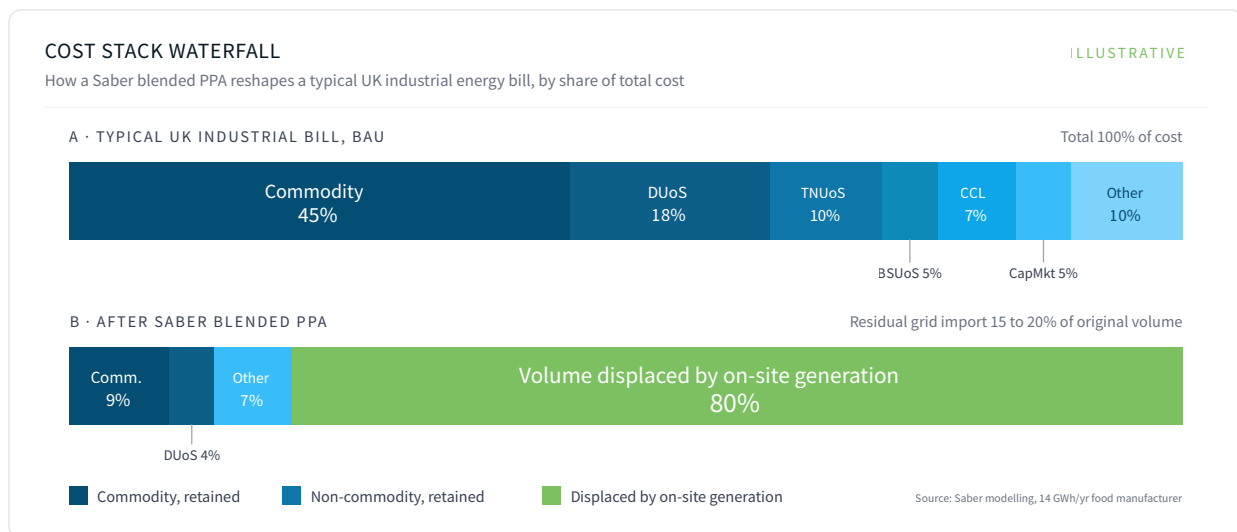

charges, in particular, have risen consistently year on year as the system absorbs the cost of grid reinforcement and renewable integration.

A fixed retail tariff fixes only the commodity element. Everything else continues to drift upward. When the tariff renews, the buyer faces both the new commodity rate and the accumulated non-commodity inflation. There is no escape route within the standard supply model.

A Saber PPA changes the structure. By generating behind the meter, a client can reduce the volume of grid-imported electricity, which in turn reduces the volume against which non-commodity charges are levied. Both the commodity rate and the non-commodity stack are addressed. The savings compound through the term, growing in real terms as wholesale and network charges escalate, opposed to the ppa, this follows a predetermined forecast, index linked for the term. At contract execution. A site that signs a fifteen-year PPA in year one is

ESG disclosure pressure

Streamlined Energy and Carbon Reporting (SECR), the Energy Savings Opportunity Scheme (ESOS) Phase 4, and the Science Based Targets initiative require traceable, auditable evidence. The UK government's Industrial Energy Transformation Fund (IETF) and the forthcoming Carbon Border Adjustment Mechanism are reshaping the commercial calculus around industrial decarbonisation. Customers in retail, automotive, food and pharmaceutical supply chains are pushing carbon reduction targets onto their suppliers, with measurable annual progression.

A claim built on contractual instruments alone is no longer sufficient for many assurance standards. Verifiable on-site renewable generation, supported by validated data and where applicable a combination of REGO and RGGO certification, providing clients evidence based reporting, whether this be for internal or external review.

Sector Signals, Where the Blended Model

Manufacturing is diverse, but the energy patterns are predictable. The signals below indicate optimal clients for a blended Saber solution. Sites matching two or more of the patterns below typically generate a credible business case at first feasibility.

Food & drink

Day-weighted electrical demand from processing and packaging, with night sanitation and defrost cycles. Thermal demand from ovens, steam, LTHW, pasteurisation, roasting and drying, alongside significant refrigeration and compressed air loads. Strong fit for solar PV on daylight load, CHP where heat and power coincide, and grid optimisation across 24/7 operation.

Cold storage & logistics

Continuous refrigeration baseload with predictable profiles and roof footprints typically suited to large-scale solar. Strong fit for solar PV and demand-side optimisation, with rapid commercial returns. CHP is also complementary where a thermal load is present on site, with waste heat convertible to cooling via absorption chilling to offset refrigeration load directly.

Paper, tissue & corrugated

Uninterrupted operations, steam systems and large electrical drives. CHP economics are typically the strongest in UK manufacturing on these sites where heat integration is feasible, with solar PV trimming daylight import.

Chemicals & pharma

Reactors, HVAC and cleanrooms, steam and utilities, with strict assurance and change control. CHP where heat recovery is valuable, paired with solar PV. Validation-ready evidence packs are integrated into the engagement from the first feasibility, in line with regulated environments.

Glass, ceramics and brick

Furnaces and kilns with continuous or campaign operations. CHP assessed case by case, depending on heat integration. Solar PV trims daylight import, particularly valuable on long- or electricity exposure.

Engineered wood, insulation & construction materials

Dryers, presses and furnaces, with large estates often offering substantial roof and land for solar deployment. CHP evaluated where heat and power align.

Metals & foundries

Melting, heat treatment, presses and rolling, with significant baseload. Solar PV for daylight load, with CHP assessed where pre-heat or process water heating is present.

Plastics & films

High electrical load from extrusion, blow-moulding and compressors, with steady long runs. Strong fit for solar PV and CHP where supplementary heating, drying or process water heating provides a credible heat sink.

Why a blended stack?

A single-technology displaces minimal baseload. In a blended scenario, Solar PV addresses daytime electrical demand. CHP addresses simultaneous heat and power. BESS addresses peaks, shoulder hours and resilience. Each asset covers a different part of the demand curve. Combining them under one PPA delivers a lower total energy cost than any one technology alone, with carbon outcomes that hold up under audit. The chapters that follow show how the commercial structure enables ppa integration with zero disruption, or cost.



Sector Reference Matrix

The blended stack applies across UK manufacturing sub-sectors with adjustments to the technology mix and watchpoints. The matrix below summarises the first-fit blend, the data needed to qualify a site, and the most common red flags by sector.

Sub-sector	Typical loads	First-fit blend	Data to request	Watchpoints
Food and Drink	Refrigeration, ovens, steam, compressed air, HVAC	PV + CHP where roasting, baking or pasteurisation heat aligns	12-month half-hourly import, gas use by process, shift schedule, roof and estate photographs	Extreme seasonality, undersized electrical incomers
Cold Storage and Logistics	Refrigeration baseload, HVAC	PV-led, CHP assessed where complementary thermal load exists	Refrigeration load profile, roof footprint, grid context, on-site thermal loads	Heat sink limited, tariff structure
Plastics and Films	Extrusion, blow-moulding, compressors	PV + CHP where supplementary heating exists	Compressor logs, production hours, roof layout, harmonics studies	Roof condition, space constraints
Paper, Tissue, Corrugated	Paper machines, steam, drives	CHP-led + PV for daytime trim	Steam profiles, machine schedules, outage windows	Export curtailment, DNO coordination
Glass, Ceramics, Brick	Furnaces, kilns, continuous campaigns	PV to trim daytime import, CHP rarely viable	Furnace campaign data, planned rebuilds, electrical SLDs	High harmonic environments, thermal integration limits
Chemicals and Pharma	Reactors, HVAC, cleanrooms, regulated steam	PV + CHP where validated heat use exists	Validation and change-control requirements, critical loads, emissions consents	Validation timelines, ATEX interfaces
Metals and Foundries	Melting, heat treatment, presses, rolling	PV + CHP where pre-heat or process water heating present	Shift patterns, furnace schedules, protection settings	Short outage windows, crane and roof loading
Engineered Wood and Insulation	Dryers, presses, furnaces	PV-led, CHP evaluated case by case	Drying schedules, estate maps, planning constraints	Dust environments, fire protection

Commercial PPAs, Explained

A Power Purchase Agreement is a long-term contract under which a generator funds, installs and operates energy assets on or near the customer's site, and the customer buys the metered output at a pre-agreed rate. There is no capital outlay. A client maintains zero commercial liability with regard to asset value, be that deployment or residual, as well as having the benefit of passing all operation and maintenance responsibility across to the asset owner, Saber. The contract is treated as operating expenditure under most accounting frameworks, with the assets remaining on Saber's balance sheet, subject to the customer's specific accounting policy and auditor view.

The Saber commercial PPA has four characteristics that matter to a manufacturing buyer.

Zero capital outlay: Saber funds every part of the deployment, including site remediation works where they are necessary to enable the assets, for example re-roofing or plant-room

upgrades. These are wrapped into the PPA economics rather than being considered a liability of the client.

Behind-the-meter first: Solar PV and CHP are installed on the site, behind the customer's main supply meter. Generation displaces grid import. The site continues to draw from the grid for any residual demand.

Long tenor: Agreements typically run from 10 to 25 years, depending on the asset mix and site ownership. The buyer trades the false certainty of a two or three-year retail tariff for the genuine certainty of a long-tenor supply rate, with full transparency on indexation.

Performance risk sits with Saber: Output, availability and maintenance are Saber's responsibility. If the assets underperform, the site does not pay for output it did not receive. Service visits, parts, monitoring and reporting are included for the term.

DRIVER MATRIX

Every Saber engagement is shaped around the customer's dominant driver. In practice this falls into one of three patterns.

FINANCE DIRECTOR PRIORITY

Cost-led

- Lower total energy cost across the full consumption profile
- Budget certainty over a fixed contract horizon
- CHP-led blend, optimised for self-consumption and payback

SUSTAINABILITY PRIORITY

ESG-led

- Solar PV-led blend, with compelling on-site carbon reduction
- Hydrogen ready CHP provides a clear pathway to long-term carbon neutrality
- Defensible Scope 1 & 2 reduction with auditable evidence pack

MOST COMMON, MID-MARKET

Both

- Cost certainty and credible carbon reductions together
- Engineered to deliver under one PPA, not two
- No tension between outcomes when the design is right

How a Saber PPA is structured

Each bespoke Saber PPA is tailored to the site and client expectations, as opposed to a generic contract pulled off the shelf. The level of bespoke design distinguishes a Saber commercial PPA from a conventional supply agreement, and it is what allows the same model to apply across small mid-market manufacturers and complex multi-site industrial estates. The commercial structure typically covers:

- **Tariff structure:** fixed £/MWh for electrical output, inclusive site savings for CHP thermal off-take where appropriate, with transparent indexation linked to CPI at contract execution
- **Term:** 10 to 25 years, correlated to the asset mix and the customer's strategic horizon
- **Service and availability:** full operations and maintenance included, with availability guarantees and performance incentives
- **Take-or-pay provisions:** structured to protect both parties without penalising the customer for ordinary operational changes
- **End-of-term arrangements:** with options for renewal, asset transfer or removal, defined at contract execution
- **Site remediation:** where necessary works are wrapped into the agreement rather than billed separately

The Blended Stack

The right technology mix is determined by how the site operates. The four assets below cover the major load shapes in UK manufacturing. Saber engineers the blend to match the demand curve, the heat-to-power ratio, the roof and land position and the grid context.

Solar PV

Solar PV displaces daytime grid import. On manufacturing sites this is most valuable where production hours overlap meaningfully with daylight hours, which covers most single and double-shift operations. In multi-shift and continuous operations, solar trims the daytime peak and reduces non-commodity charge exposure on the displaced volume.

Design priorities are structural assessment of the roof, glare studies for any logistics or access routes, fire and safety provisions for behind-the-meter inverters, and confirmation of warranty terms aligned to the PPA tenor. Where roof condition is marginal, re-roofing can be funded within the PPA and amortised across the term.

CHP, the workhorse of the blend

CHP acts as the core asset on UK manufacturing sites with simultaneous heat and power demand. A gas-fuelled engine drives a generator producing electricity, the engine's waste heat is recovered through heat exchangers and delivered to site as low-temperature hot water (LTHW), medium-temperature hot water, or low-pressure steam, depending on the unit configuration and the site's process needs.

The heat is integrated directly with the site's existing thermal infrastructure. LTHW circuits feed space heating, hot water and lower-grade process loads. Higher-grade outputs feed steam headers, boiler returns or dedicated process loops. Where a site already operates a gas-fired boiler, CHP heat displaces a measurable proportion of that boiler's load, reducing both gas consumption and Scope 1 emissions. Where steam pressure or temperature requirements exceed CHP output, Saber's design retains the existing boiler in a peaking and back-up role rather than displacing it entirely. The result is an integrated thermal solution, not a replacement for the site's process heat plant.

Saber deploys CHP in partnership with 2G Energy, whose technology is highly efficient on primary energy use. 2G's commercial portfolio includes manufacturing deployments at Merck KGaA (pharmaceutical, 2 x Avus 1500c), Georg Utz (plastics processing, Avus 2000a), and Axel Springer offset printing (G-box 50), among many others. The product range scales from 20 kWe to 4,500 kWe per unit, allowing the right engine to be matched to the site rather than the site forced to fit the solution.

CHP is suitable where simultaneous heat and power loads run for 5,000 to 8,500 hours per year. Below that utilisation threshold the economics weaken, and the blend may favour solar PV with grid optimisation. Where heat use is intermittent or seasonal, careful sizing protects the economics across the year.

Saber can provide a ring-fenced gas supply point within its leased area on site and operate the gas kiosk under the PPA, removing the supply procurement, administration and potential ESG liability burdens from the customer.

BESS, where coverage is needed

Battery Energy Storage Systems perform three roles on a manufacturing site, storing energy from on-site solar, covering demand peaks of high tariff periods, and supporting resilience for critical loads. Saber is actively expanding BESS integration into the blend. Where sites present strong economics for storage, BESS is engineered alongside the solar and the CHP layer; where they do not, the blend proceeds without it.

Process heat and the electrification roadmap

For sites with thermal demand profiles that do not match a CHP application, or for sites planning longer-term electrification, Saber sequences the deployment so that heat pumps, direct electric heating or process modifications can be staged into the agreement. The blend is engineered to evolve with the customer's decarbonisation pathway along with the changing economics of grid carbon intensity. As the UK grid continues to decarbonise, the relative value of grid-imported electricity changes, and the optimal blend evolves with it. Saber's commercial structure accommodates technology phasing across the term, so a deployment that begins as solar-and-CHP can incorporate heat pumps, additional storage or full electrification as the site's roadmap progresses.

How the layers combine



The assets are not interchangeable. Each covers a different part of the demand curve. Solar PV peaks at midday and falls off through the afternoon. CHP runs 24/7 when electrical and thermal demand are needed. The Saber Intelligence Platform models the dispatch minute by minute against the site's actual half-hourly data, showing how the optimum mix delivers across different manufacturing processes and load profiles.

Saber Bridge to Grid


Saber's Bridge to Grid solution enables operators to expedite planned development on new sites, providing day one power through a PPA enabled CHP solution ahead of grid connection.

For new build and expansion sites, the gap between site readiness and grid energisation is increasingly the critical path. DNO reinforcement timelines across much of the UK now stretch into multi-year horizons, and every month of delay carries a direct cost in deferred revenue, deferred commissioning and deferred return on capital already deployed.

Saber Bridge to Grid resolves this by funding and delivering on-site CHP under the standard zero-capex commercial PPA

structure, allowing the site to come into operation on its planned programme rather than the connection queue's. The asset transitions into a resilience or heat-led role within the longer-term blended PPA, protecting the value of the deployment across its full term when the grid connection is energised.

Bridge to Grid is being applied across data centre, manufacturing and logistics deployments.

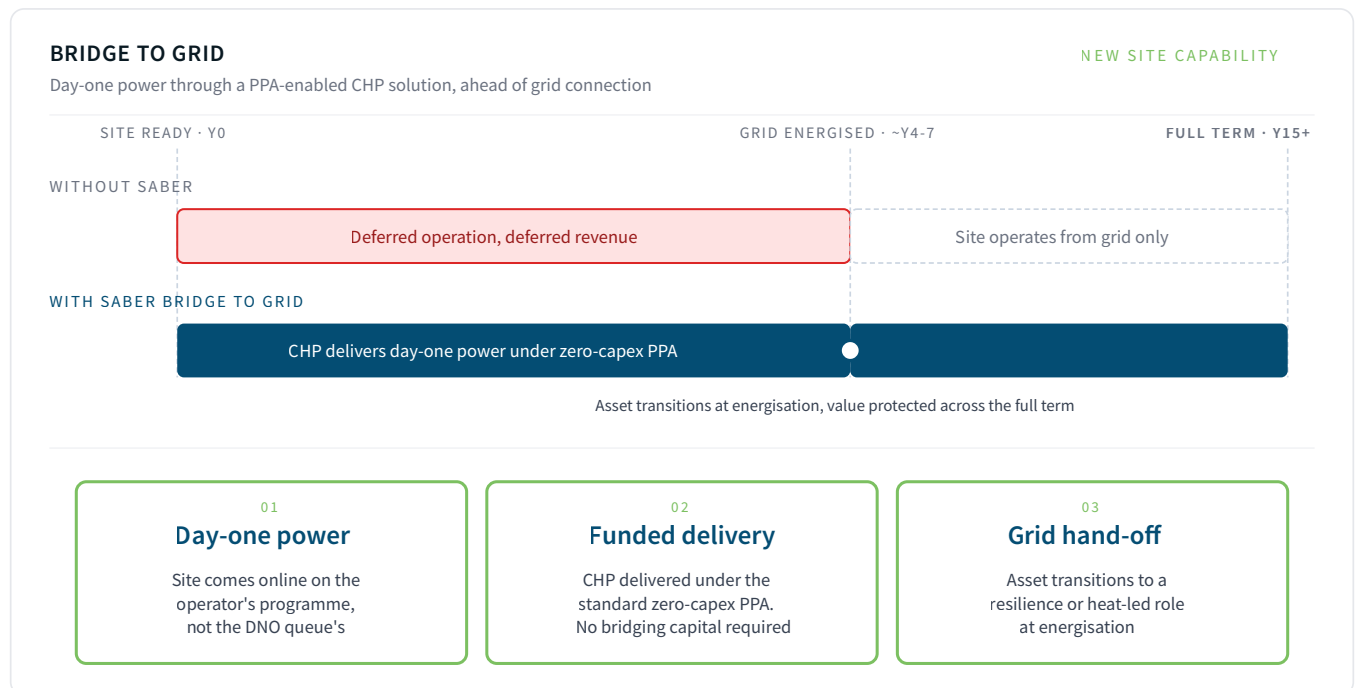

Hydrogen-Ready CHP, Asset Protection Over the Term

CHP investment over a fifteen-year PPA term raises a fair question, how will hydrogen impact the asset? The honest answer is that the engine matters. Saber's choice of 2G Energy as the CHP technology partner is deliberate, and the hydrogen position is central to it.

The 2G technology pathway

2G's Agenitor and Avus engine ranges, covering 75 kWe to 4,500 kWe, are operational on natural gas, biogas or hydrogen across selected configurations. The Agenitor 404 H2, a 115 kWe unit, is in commercial deployment running on 100 per cent hydrogen. The APEX Energy Teterow installation, a containerised Agenitor 404c H2, is a further example of operational hydrogen CHP at industrial scale. This is not a roadmap claim. The technology operates today.

For sites deploying CHP under a Saber PPA, the practical implication is that the asset is positioned for the hydrogen transition without requiring speculative bets on future fuel availability. As biomethane supply expands, RGGO retirements support credible Scope 1 reduction claims today. As hydrogen supply matures over the coming decade, the engine pathway is already proven.

The moral compass argument

There is a temptation in the industrial decarbonisation conversation to treat CHP as a transitional technology, useful now, retired later. That framing is wrong on two counts.

First, the alternative for a manufacturing site facing a fifteen-year horizon is not "wait for hydrogen". It is grid electricity at the prevailing carbon intensity, with non-commodity charges, supply volatility and connection queue exposure layered on top. CHP under a Saber PPA, sized correctly and run efficiently, displaces a measurable volume of grid emissions today and reduces total energy cost.

Second, the engine is not the constraint. The fuel is. A 2G hydrogen-capable engine installed in 2026 is a hydrogen asset in waiting, exposed to the upside of the UK Hydrogen Strategy without requiring the strategy to land on schedule.

The framing Saber uses internally is that hydrogen-ready CHP protects the asset over the term whilst delivering the savings and resilience a manufacturer needs from the current energy mix. The two outcomes do not trade off against each other. They reinforce. Cost certainty funds the decarbonisation roadmap. The decarbonisation roadmap, in turn, protects the asset against a regulatory and customer environment that is moving steadily toward verifiable, audited carbon outcomes. A manufacturer that defers action on either driver typically ends up paying for both later, on less favourable terms.


What this means for the customer

From a financial perspective, hydrogen-readiness is not a soft benefit. It is commercial protection over the PPA term

From a sustainability perspective, hydrogen-readiness is a credible answer to investor and customer questions regarding Scope 1 trajectory. The pathway from natural gas through biomethane to hydrogen is engineered into the asset class, not bolted on through reporting.

Why This Matters

- 2G Agenitor and Avus engines, operational on natural gas, biogas or hydrogen
- Hydrogen units already in commercial deployment, including the Agenitor 404 H2
- Asset positioned for the UK Hydrogen Strategy, without requiring it to land on schedule

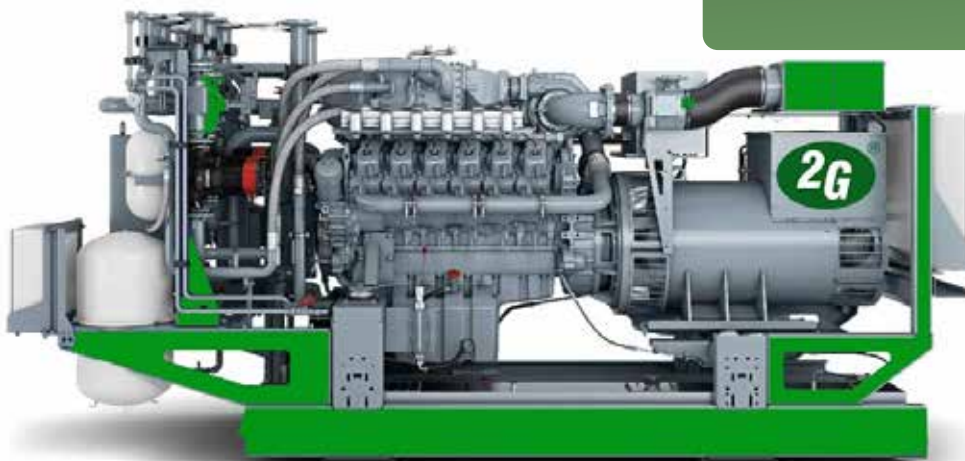

Delivery, the Saber Approach

A Saber engagement progresses through six stages, from initial feasibility to ongoing operation and reporting. The whole process is grid-aware from the first conversation.

Phase 1: Feasibility

Data request covering 12 months of half-hourly electrical import, gas and steam consumption, production hours by shift, electrical single-line diagram, main switchboard details, protection settings, roof plans, estate maps, planning and heritage constraints, and recent grid correspondence. Saber Intelligence Platform ingests the data and produces a baseline load profile, a CHP dispatch model and a blended scenario within four to six weeks.

Phase 2: Design & commercial terms

Final solar PV layout, CHP capacity and configuration sized against the load duration curve, BESS scoped where applicable, export control strategy, and commercial structure including tariff, escalation, service levels and contract length.

Phase 3: Grid & permitting

G99 application to the DNO, export limits and Active Network Management coordination, planning and building control submissions where required, environmental and heritage consents where applicable. These activities run in parallel where possible.

Phase 4: Financing & contracts

Financial close, insurance, performance guarantees and manufacturer warranties.

Phase 5: EPC & commissioning

Procurement, site works, electrical and mechanical installation, factory and site acceptance testing, commissioning, calibration, on-site training, go-live under PPA terms.


Phase 6: Operate & optimise

Scheduled CHP servicing, PV cleaning, real-time performance dashboards, annual reviews, ongoing optimisation against tariff and consumption changes. The Saber Intelligence Platform monitors the operation, flags optimisation opportunities, and provides the evidence pack for SECR, ESOS and supply chain ESG reporting.

A typical mid-market manufacturing site moves from contract execution to commercial operation in six to nine months.



Saber Intelligence Platform, scale of delivery

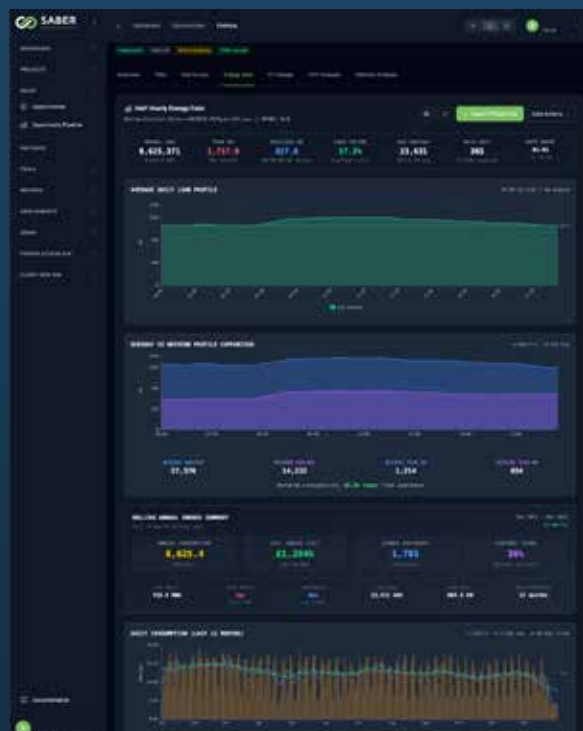

The Saber Intelligence Platform integrates half-hourly consumption data, site geospatial analysis, grid infrastructure mapping, financial modelling, dispatch simulation and partner delivery tracking under a single workflow. The same platform, data pipeline and delivery team that runs Saber's current commercial estate programmes will onboard a new manufacturing engagement, with the data ingestion, modelling and reporting workflow already proven at scale.

Backed by a £300m senior secured facility

Saber operates within the SRE Capital Group, which provides the capital structure for project finance. The platform is supported by a £300 million senior secured facility from Pollen Street Capital, enabling deployment at portfolio scale without recourse to the customer.




Working with Saber, Next Steps

Saber engagements typically run through two primary stakeholders on the customer side, the Finance Director and the Head of Energy or Engineering. Procurement, Sustainability and Operations contribute as the engagement matures. The model is structured to give each function the evidence it needs.

For the Finance Director: Cost certainty over the PPA term, transparent comparison against business as usual at total energy cost level, zero capital outlay, off-balance-sheet treatment under most accounting frameworks.

For the Head of Energy or Engineering: Single-line diagram tie-in, protection studies, measurement and verification protocols, real-time dashboards on the Saber Intelligence Platform.

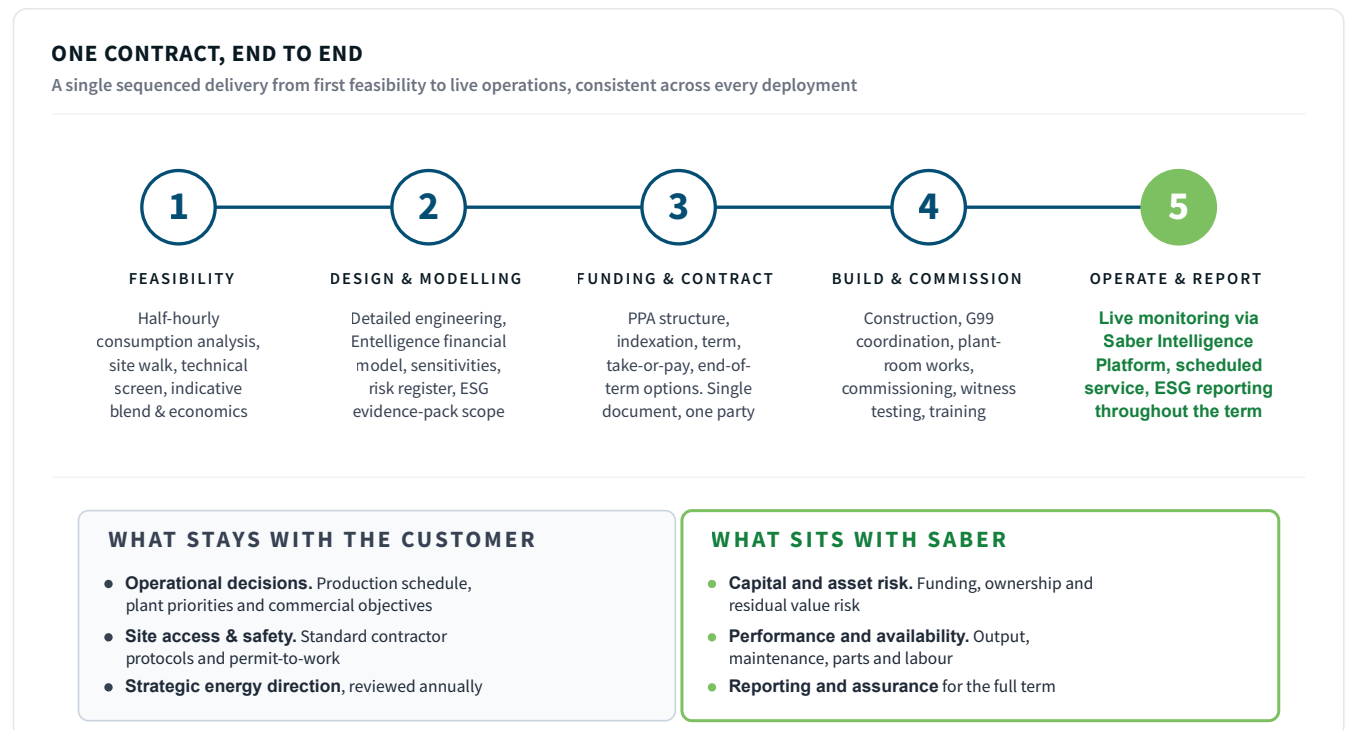

Next steps

1. **Share data:** Send 12 months of half-hourly electrical import, gas consumption, basic site drawings and recent grid correspondence to Saber. A letter of authority lets Saber retrieve half-hourly data directly from the incumbent supplier where preferred.
2. **Feasibility workshop:** Saber returns an indicative blend, savings range, carbon outcome and delivery timeline within one to two weeks of receiving the data. A workshop walks the stakeholders through the model and confirms the dominant driver, cost, ESG or both.
3. **Pilot site:** For multi-site operators, select the strongest-fit site as the flagship deployment. Prove the model, capture performance data, then progress the wider estate under a master agreement.
4. **Scale across the estate:** Subsequent sites are wrapped into the same agreement, with the deployment phased to match capital appetite, operational windows and grid availability site by site.

Appendices

A. Glossary

PPA: Power Purchase Agreement. A long-term contract under which Saber funds, installs and operates on-site generation assets, and the customer buys metered output at a pre-agreed rate.

G99: The Engineering Recommendation governing the connection of generation assets to the UK distribution network.

DNO: Distribution Network Operator. The regional grid company responsible for the local distribution network and the G99 process.

GSP: Grid Supply Point. The settlement group used in metering and loss factor calculation.

ANM: Active Network Management. A DNO mechanism for managing constrained connections, often applied to allow new generation to connect ahead of physical reinforcement.

REGO: Renewable Energy Guarantee of Origin. A certificate evidencing one MWh of renewable electricity generation, used in market-based Scope 2 reporting.

RGGO: Renewable Gas Guarantee of Origin. The equivalent certificate for biomethane supply.

LTHW / MTHW: Low-Temperature Hot Water and Medium-Temperature Hot Water, two of the principal heat distribution grades captured from CHP for site use.

SECR: Streamlined Energy and Carbon Reporting. The UK requirement for large companies to disclose energy use and carbon emissions in their annual report.

ESOS: Energy Savings Opportunity Scheme. The UK mandatory energy assessment scheme, currently in Phase 4.

IETF: Industrial Energy Transformation Fund. UK government grant funding for industrial decarbonisation projects.

CBAM: Carbon Border Adjustment Mechanism. The forthcoming EU and UK regimes that price embedded carbon in imported goods.

SBTi: Science Based Targets initiative. An independent body that validates corporate climate targets.

B. Why DNO and GSP matter

The DNO dictates the G99 timeline and any export constraints. Early engagement avoids late-stage redesign and protects the delivery timeline. GSP groups affect loss factors and tariff components, so designs and commercial terms are tuned to the specific GSP context of each site.

C. Data request template

The minimum dataset for a robust feasibility:

- 12 months of half-hourly electrical import in CSV
- Gas and steam consumption logs by month, ideally by process
- Production hours by shift
- Electrical single-line diagram
- Main switchboard details and protection settings
- Roof plans and estate maps
- Planning and heritage constraints
- Recent grid correspondence

D. RFP checklist

For operators preparing to issue a competitive process:

- Objectives and constraints, defining the dominant driver (cost, ESG, both)
- Site data pack (as above)
- Commercial preferences (term, indexation, caps and floors)
- Assurance requirements (SECR, ESOS, SBTi, audit standard)
- Timeline expectations and any board approval gates
- Existing supply contract end dates and any minimum-term commitments

Let's Power It Together.

A Saber commercial PPA gives UK manufacturers a path to lower energy costs, credible carbon reductions and operational resilience, with no capital outlay and no asset ownership. The model is grid-aware, evidence-led, and designed around the customer's dominant driver.

Share 12 months of half-hourly data and basic site details, Saber returns an indicative blend, a savings range and a delivery timeline.



www.saberrenewables.com



+44 (0) 203 940 3030 info@saberrenewables.com