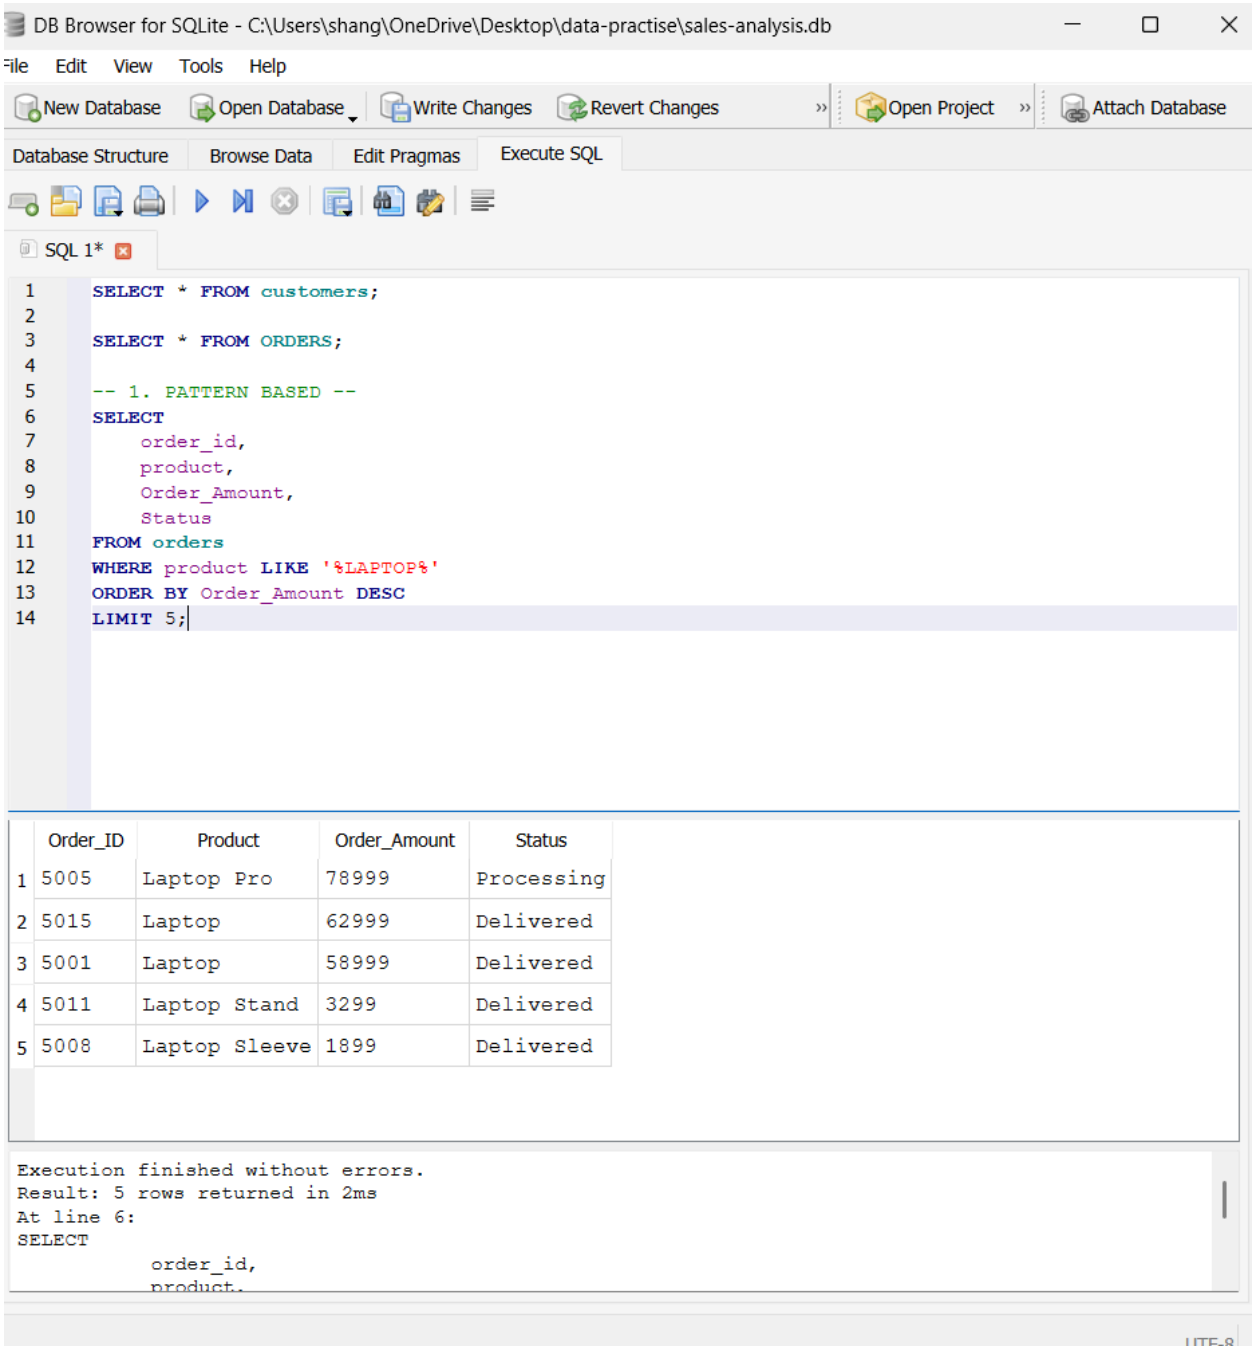
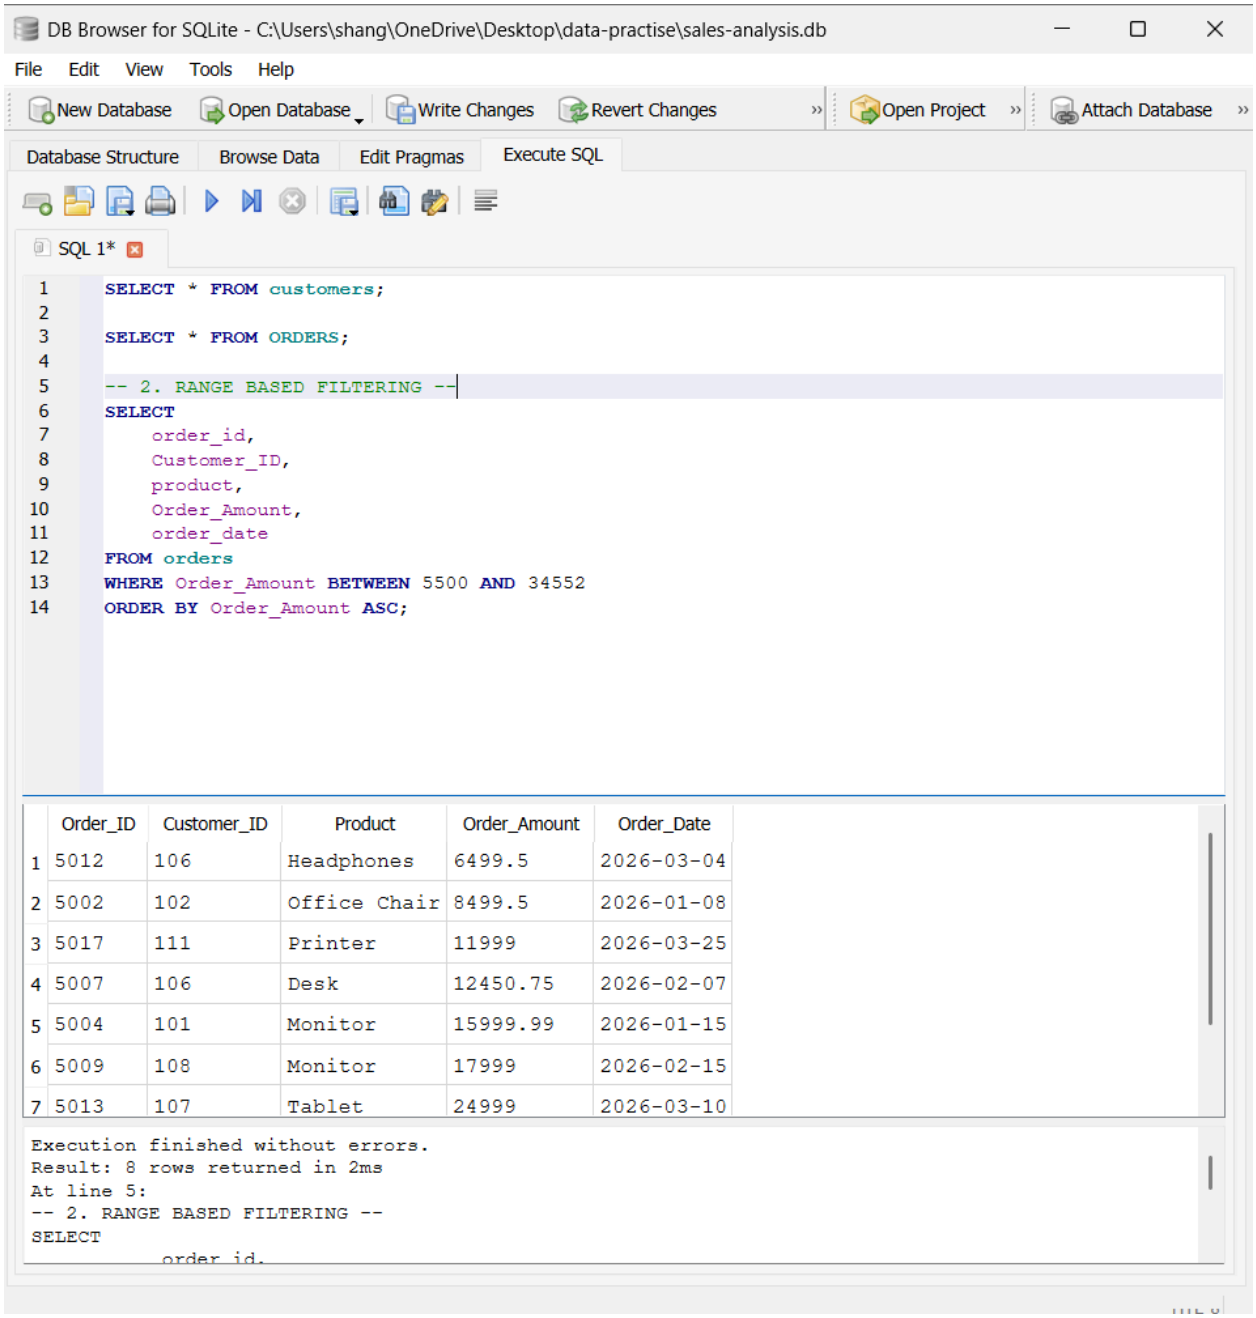
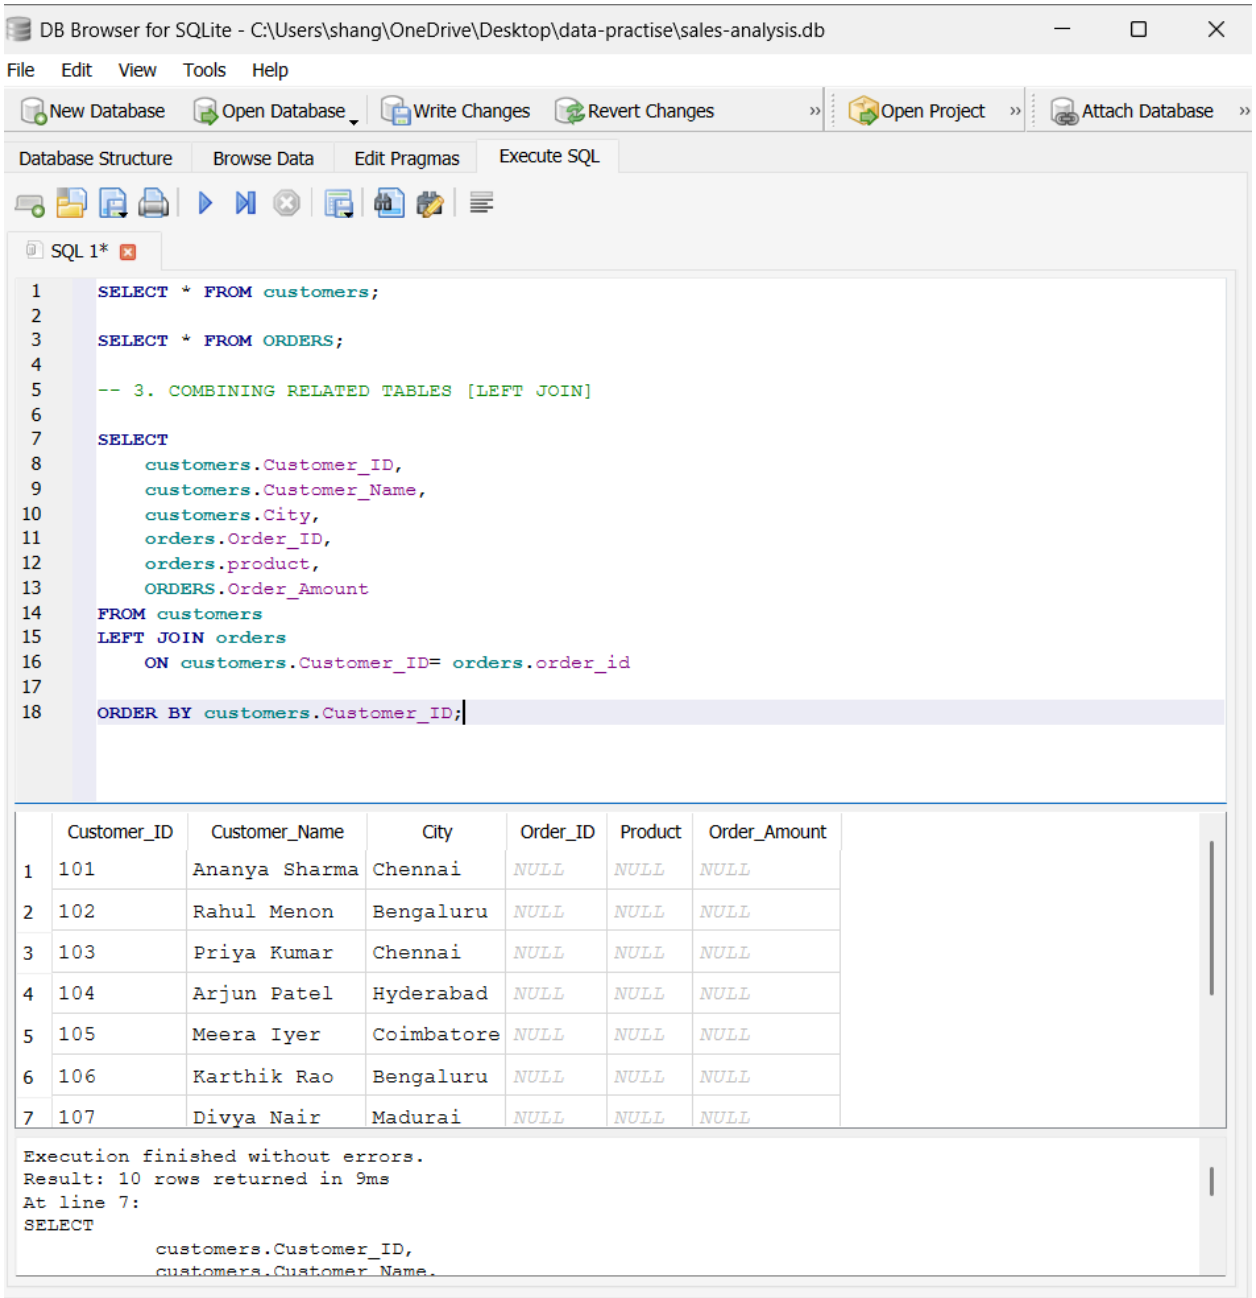
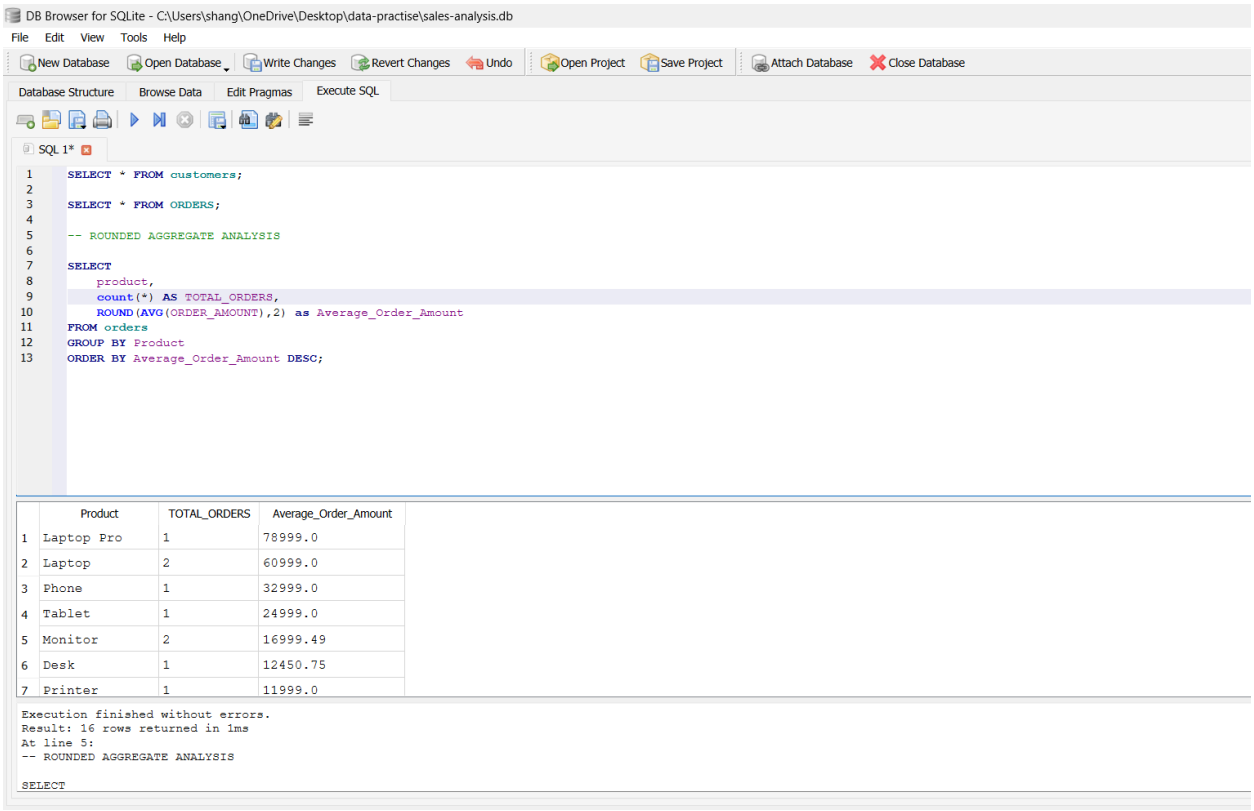

DB Browser for SQLite - C:\Users\shang\OneDrive\Desktop\data-practise\sales-analysis.db
File Edit View Tools Help
New Database
Open Database
Write Changes
Revert Changes
Open Project
Attach Database
Database Structure
Browse Data
Edit Pragmas
Execute SQL
SQL 1*
1 SELECT * FROM customers;
2
3 SELECT * FROM ORDERS;
4
5 -- 1. PATTERN BASED --
6 SELECT
7 order_id,
8 product,
9 Order_Amount,
10 Status
11 FROM orders
12 WHERE product LIKE '%LAPTOP%'
13 ORDER BY Order_Amount DESC
14 LIMIT 5;
Order_ID Product Order_Amount Status
1 5005 Laptop Pro 78999 Processing
2 5015 Laptop 62999 Delivered
3 5001 Laptop 58999 Delivered
4 5011 Laptop Stand 3299 Delivered
5 5008 Laptop Sleeve 1899 Delivered
Execution finished without errors.
Result: 5 rows returned in 2ms
At line 6:
SELECT
order_id,
product,


DB Browser for SQLite - C:\Users\shang\OneDrive\Desktop\data-practise\sales-analysis.db
File Edit View Tools Help
New Database
Open Database
Write Changes
Revert Changes
Open Project
Attach Database
Database Structure
Browse Data
Edit Pragmas
Execute SQL
SQL 1*
SELECT * FROM customers;
SELECT * FROM ORDERS;
-- 2. RANGE BASED FILTERING --
SELECT
order_id,
Customer_ID,
product,
Order_Amount,
order_date
FROM orders
WHERE Order_Amount BETWEEN 5500 AND 34552
ORDER BY Order_Amount ASC;
Order_ID Customer_ID Product Order_Amount Order_Date
1 5012 106 Headphones 6499.5 2026-03-04
2 5002 102 Office Chair 8499.5 2026-01-08
3 5017 111 Printer 11999 2026-03-25
4 5007 106 Desk 12450.75 2026-02-07
5 5004 101 Monitor 15999.99 2026-01-15
6 5009 108 Monitor 17999 2026-02-15
7 5013 107 Tablet 24999 2026-03-10
Execution finished without errors.
Result: 8 rows returned in 2ms
At line 5:
-- 2. RANGE BASED FILTERING --
SELECT
order_id,


DB Browser for SQLite - C:\Users\shang\OneDrive\Desktop\data-practise\sales-analysis.db
File Edit View Tools Help
New Database
Open Database
Write Changes
Revert Changes
Open Project
Attach Database
Database Structure
Browse Data
Edit Pragmas
Execute SQL
SQL 1*
1 SELECT * FROM customers;
3 SELECT * FROM ORDERS;
5 -- 3. COMBINING RELATED TABLES [LEFT JOIN]
7 SELECT
8 customers.Customer_ID,
9 customers.Customer_Name,
10 customers.City,
11 orders.Order_ID,
12 orders.product,
13 ORDERS.Order_Amount
14 FROM customers
15 LEFT JOIN orders
16 ON customers.Customer_ID= orders.order_id
18 ORDER BY customers.Customer_ID;
Customer_ID Customer_Name City Order_ID Product Order_Amount
1 101 Ananya Sharma Chennai NULL NULL NULL
2 102 Rahul Menon Bengaluru NULL NULL NULL
3 103 Priya Kumar Chennai NULL NULL NULL
4 104 Arjun Patel Hyderabad NULL NULL NULL
5 105 Meera Iyer Coimbatore NULL NULL NULL
6 106 Karthik Rao Bengaluru NULL NULL NULL
7 107 Divya Nair Madurai NULL NULL NULL
Execution finished without errors.
Result: 10 rows returned in 9ms
At line 7:
SELECT
customers.Customer_ID,
customers.Customer_Name,


DB Browser for SQLite - C:\Users\shang\OneDrive\Desktop\data-practise\sales-analysis.db
File Edit View Tools Help
New Database Open Database Write Changes Revert Changes Undo Open Project Save Project Attach Database Close Database
Database Structure Browse Data Edit Pragmas Execute SQL
SQL 1*
SELECT * FROM customers;
SELECT * FROM ORDERS;
-- ROUNDED AGGREGATE ANALYSIS
SELECT
product,
count(*) AS TOTAL_ORDERS,
ROUND(AVG(ORDER_AMOUNT),2) as Average_Order_Amount
FROM orders
GROUP BY Product
ORDER BY Average_Order_Amount DESC;
Product TOTAL_ORDERS Average_Order_Amount
1 Laptop Pro 1 78999.0
2 Laptop 2 60999.0
3 Phone 1 32999.0
4 Tablet 1 24999.0
5 Monitor 2 16999.49
6 Desk 1 12450.75
7 Printer 1 11999.0
Execution finished without errors.
Result: 16 rows returned in 1ms
At line 5:
-- ROUNDED AGGREGATE ANALYSIS
SELECT