第 13 节 实操任务 1：安装 OpenClaw 并...

> **目标**：Telegram Bot 能和OpenClaw连接，并正确回复你的消息。大家先安装一个Telegram APP。如果没有Telegram的话，那么只能上网搜索连接飞书、微信等其它Bot的方法了。

背景

OpenClaw 是消息网关——它把 Telegram/微信/钉钉的消息路由到你的 Agent。本实操从零安装 OpenClaw，创建 Telegram Bot，让 Bot 说出第一句话。

> 以下操作可以用 **OpenCode**、**Claude Code**、**Cursor**、**Trae** 或**通义灵码**等任意 AI 编程工具辅助排查问题。

1.1 前置检查

说明：工具演进很快，大家最好去网络上查看本讲中各种工具的最新安装方法。

检查 Node.js 版本

```
node --version
# 需要 v22.0.0 或更高
```

如果版本低于 22 或未安装：

```
# 方法 1：使用 nvm（推荐）
curl -o- https://raw.githubusercontent.com/nvm-sh/nvm/v0.40.0/install.sh
source ~/.bashrc
nvm install 22
nvm use 22

# 方法 2：使用 fnm（更快）
curl -fsSL https://fnm.vercel.app/install | bash
source ~/.bashrc
fnm install 22
fnm use 22
```

检查 npm

```
npm --version
# 需要 10+（Node.js 22 自带）
```

验证点 ： `node --version` 输出 v22.x.x 或更高。

1.2 安装 OpenClaw

说明：OpenClaw演进很快，大家最好去https://github.com/openclaw/openclaw上查看最新安装方法。

```
# 全局安装
npm install -g openclaw@latest

# 验证安装
openclaw --version
# 输出类似：openclaw v1.x.x
```

任何安装问题，可以通过AI排查、网上搜索或者群里面讨论解决。

1.3 初始化项目

```
mkdir -p ~/ai-knowledge-base/v4-production
cd ~/ai-knowledge-base/v4-production
openclaw onboard --install-daemon
```

路径关键：必须在 `v4-production/` 下跑 onboard——这样 OpenClaw 才会把这个目录认作 workspace 的“项目根”（虽然默认还是用全局 workspace，下一节实操 2 会切到这里）。

v4-production 此时可以是空目录，onboard 会自动生成 `openclaw/` 子目录及 AGENTS.md / SOUL.md / skills/。Week 3 的代码（workflows / patterns / knowledge）下一节实操 2 再 copy 过来，本节只要 OpenClaw 能跟 Telegram 通就够了。

> **咖哥发言** `daemon` （守护进程）就是一种**在后台一直运行的程序**。
> 在 `openclaw onboard --install-daemon` 里，它通常代表把 `openclaw onboard` 安装成一个**后台服务**。这样它不用你每次手动开终端运行，系统启动后，它也可以自动启动并持续工作
> 你可以这样理解：
> 普通程序：你手动打开，它才运行；关掉终端可能就停了。
> daemon：像“后台值班员”一样，一直待命运行。

向导会询问模型提供商、API Key、Agent 名称等等。

```
huangj2@Levono-V2: ~/ai-kn
huangj2@Levono-V2:~/ai-knowledge-base/v4-production$ openclaw onboard --install-daemon

🦞 OpenClaw 2026.4.23 (a979721) — If you're lost, run doctor; if you're brave, run prod; if you're wise, run tests.

OPENCLAW

🦞 OPENCLAW 🦞

┌  OpenClaw setup
◇  Security disclaimer ──────────────
```

按提示填写即可。API Key 使用之前课程中配置的 DeepSeek Key。（我这里选择了OpenAI，你可以换成DeepSeek）

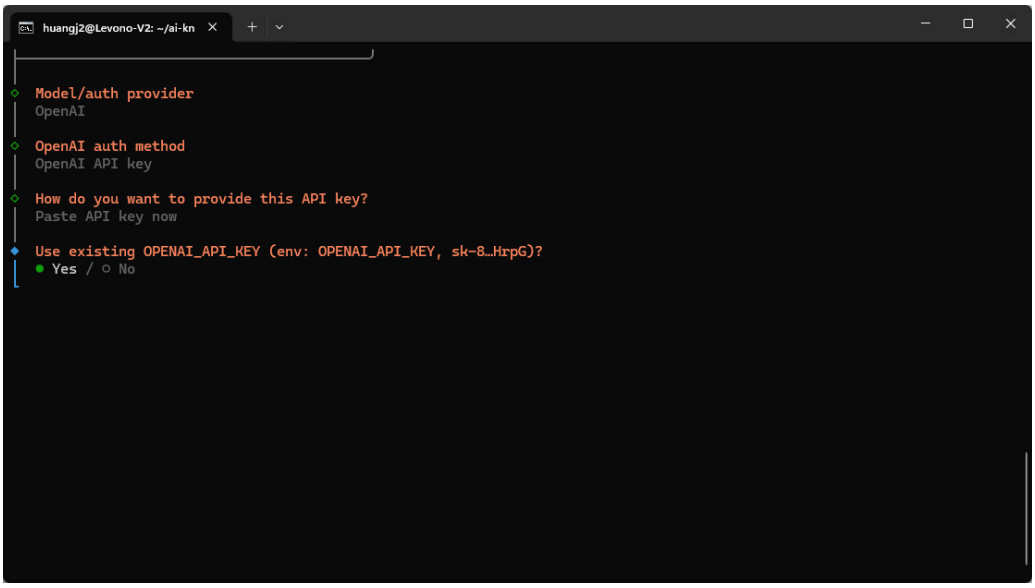

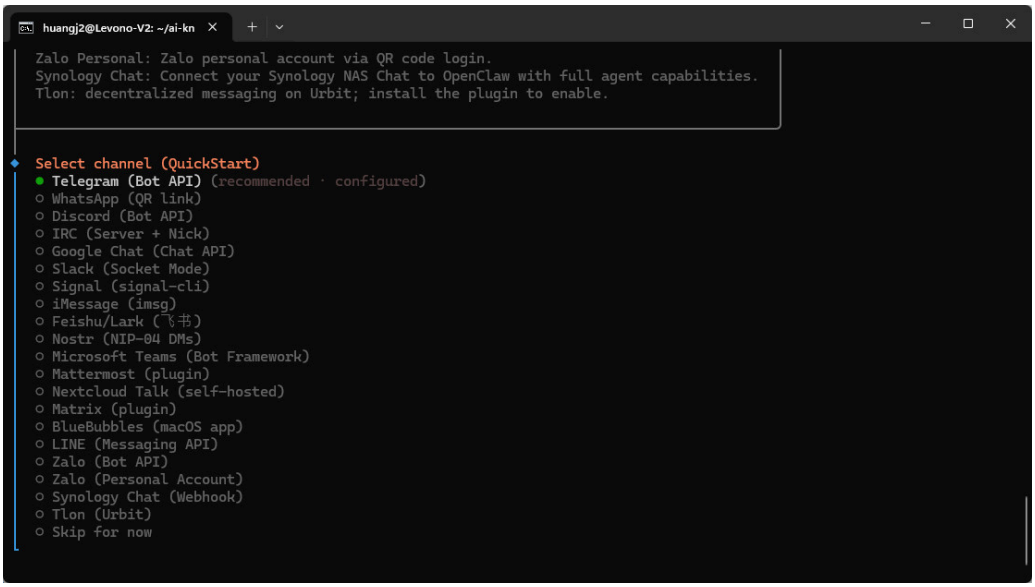

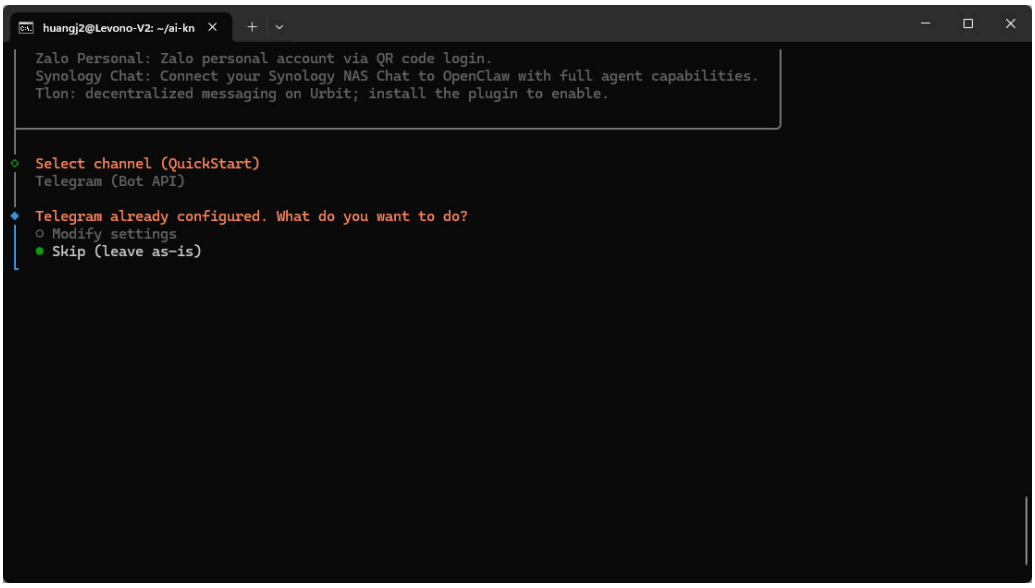

此时你还没有Telegram的Bot API Key，下面我们进行创建。

1.4 创建 Telegram Bot

此时此刻我们希望直接添加Telegram这个交互渠道，因为这是OpenClaw最简单直接的聊天桥梁。其它的沟通交流平台如飞书、微信等，审批实现流程稍微麻烦一些。

大家需要先下载Telegram这个APP。

Step 1：打开 Telegram，搜索 @BotFather

在 Telegram 的搜索栏输入 `@BotFather` ，点击官方认证的 BotFather（带蓝色认证标志）。

Step 2：创建新 Bot

发送消息：

```
/newbot
```

Step 3：设置 Bot 信息

BotFather 会依次询问：

```
BotFather: Alright, a new bot. How are we going to call it?
           Please choose a name for your bot.
你：AI 知识库助手

BotFather: Good. Now let's choose a username for your bot.
           It must end in `bot`. Like this, for example: TetrisBot
你：my_kb_assistant_bot
```

> 注意：username 必须以 `bot` 结尾，且全局唯一。 如果提示已被占用，换一个名字，比如加上你的名字缩写： `jia_kb_bot`

Step 4：获取 Token

创建成功后，BotFather 会发送：

```
Done! Congratulations on your new bot.
...
Use this token to access the HTTP API:
123456789:ABCdefGHIjklMNOpqrsTUVwxyz
```

这个过程大概下面这样

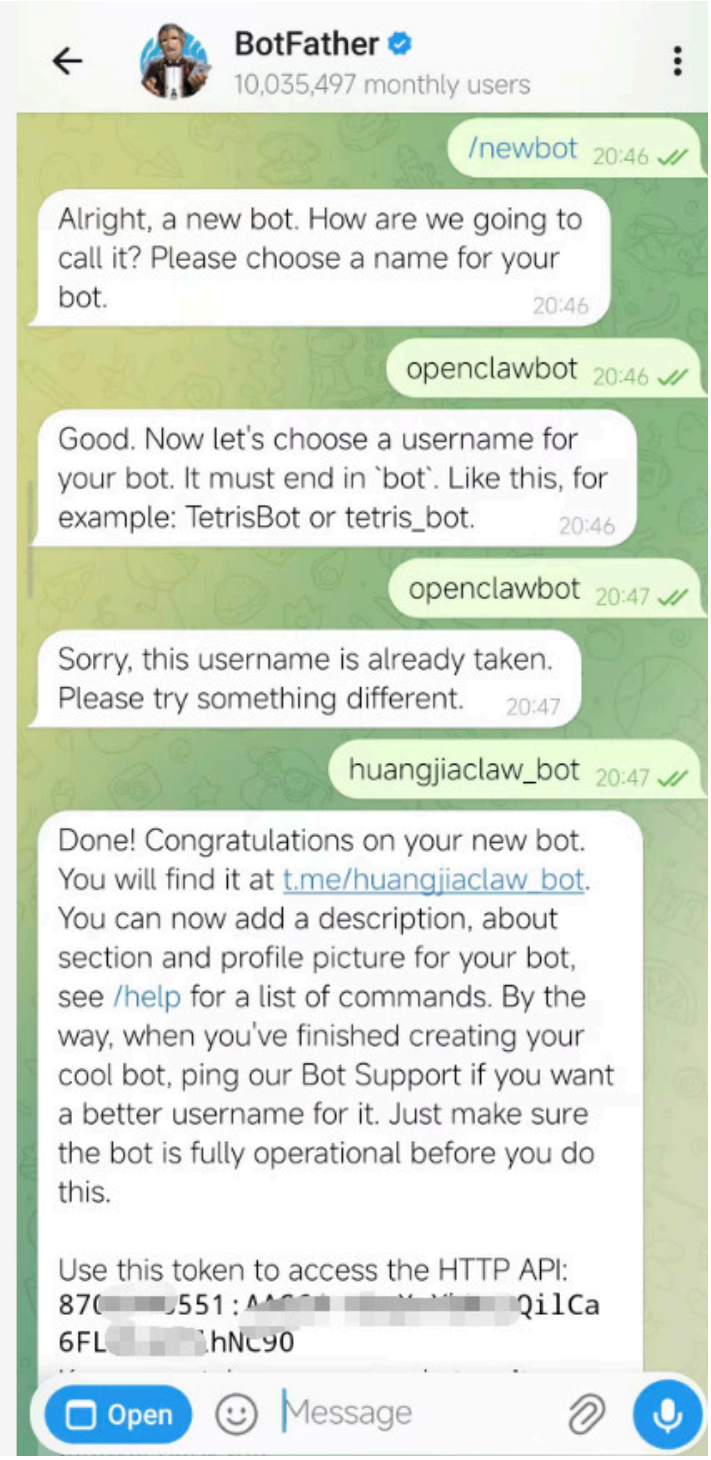

拿到了这个Token，就可以继续Telegram的配置。

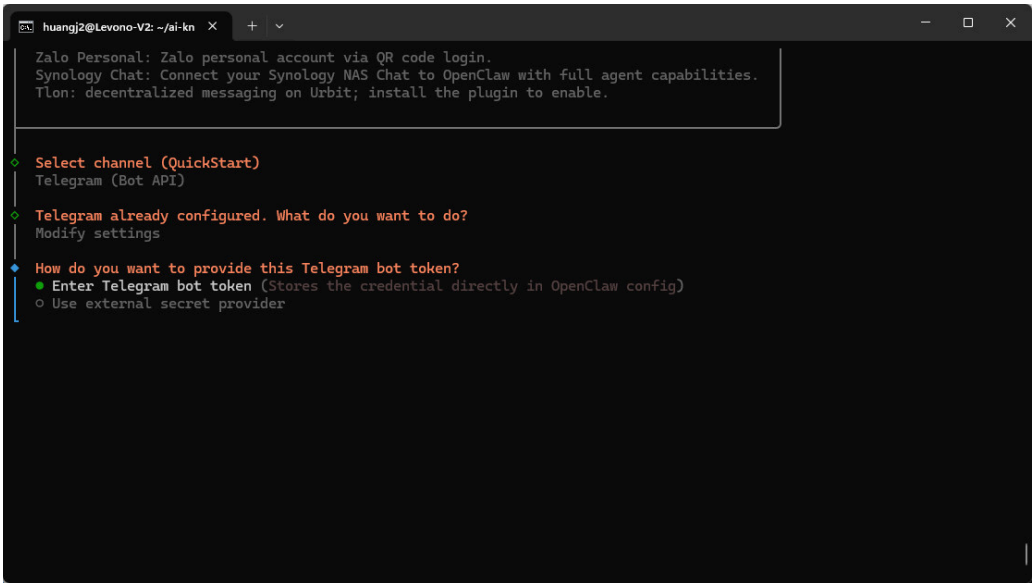

可以把Token 存入环境变量。

```
# 将 Token 存入环境变量
echo 'export TELEGRAM_BOT_TOKEN="123456789:ABCdefGHIjklMNOpqrsTUVwxyz"'
source ~/.bashrc

# 验证
echo $TELEGRAM_BOT_TOKEN
# 应输出你的 Token
```

> ⚠️ **安全提醒：**
> Token 等同于密码，拿到 Token 就能控制你的 Bot。
> 绝对不要提交到 Git（确认 .gitignore 包含 .bashrc 或 .env）。
> 如果 Token 泄露，在 BotFather 中发送 `/revoke` 重新生成。

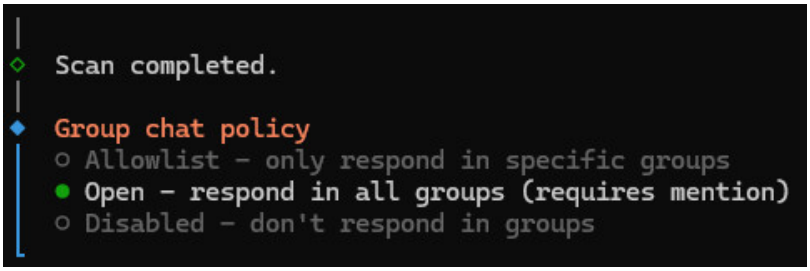

此时，Telegram这个通信工具就和OpenClaw接通了。

```
huangj2@Levono-V2: ~/ai-kn
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tlon: decentralized messaging on Urbit; install the plugin to enable.

◇ Select channel (QuickStart)
  Telegram (Bot API)

◇ Telegram already configured. What do you want to do?
  Skip (leave as-is)
Config overwrite: /home/huangj2/.openclaw/openclaw.json (sha256 72b7361d114afbf4a9fbd7efb490561251af0a96c45968ba20ca01c4e19c3f2f -> 015c98e3a7ccc5922366e793831dab6e3b48626232ec0603f935f85f17a99037, backup=/home/huangj2/.openclaw/openclaw.json.bak)
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

◇ Skills status
  Eligible: 12
  Missing requirements: 35
  Unsupported on this OS: 7
  Blocked by allowlist: 0

◆ Configure skills now? (recommended)
  ● Yes / ○ No
```

1.5 完成其它配置

下面，继续其它配置。

按Space键选中最需要的Skills

```
huangj2@Levono-V2: ~/ai-kn
  Yes

◆ Install missing skill dependencies
  ■ Skip for now (Continue without installing dependencies)
  □ 🔐 1password
  □ 📰 blogwatcher
  □ 🫐 blucli
  □ 📷 camsnap
  □ 🧩 clawhub
  □ 8️⃣ eightctl
  □ ♊ gemini
  □ 🧲 gifgrep
  □ 🎮 gog
  □ 📍 goplaces
  □ 🏔 himalaya
  □ 📦 mcporter
  □ 📄 nano-pdf
  □ 💎 obsidian
  □ 🎙 openai-whisper
  □ 💡 openhue
  □ 🧿 oracle
  □ 🛍 ordercli
  □ 🗣 sag
  □ 🎶 songsee
  □ 🔊 sonoscli
  □ 📝 summarize
  □ 🎞 video-frames
  ...
```

可以按space装一些Hook。

```
huangj2@Levono-V2: ~/ai-kn

◇ Skills status
  Eligible: 12
  Missing requirements: 35
  Unsupported on this OS: 7
  Blocked by allowlist: 0

◇ Configure skills now? (recommended)
  No

◇ Hooks
  Hooks let you automate actions when agent commands are issued.
  Example: Save session context to memory when you issue /new or /reset.

  Learn more: https://docs.openclaw.ai/automation/hooks

◆ Enable hooks?
  ◻ Skip for now
  ■ 🚀 boot-md (Run BOOT.md on gateway startup)
  ■ 📎 bootstrap-extra-files (Inject additional workspace bootstrap files via glob/path patterns)
  ■ 📝 command-logger (Log all command events to a centralized audit file)
  ■ 💾 session-memory (Save session context to memory when /new or /reset command is issued)
```

```
huangj2@Levono-V2: ~/ai-kn

◇ Set NOTION_API_KEY for notion?
  No

◇ Set ELEVENLABS_API_KEY for sag?
  No

◇ Hooks
  Hooks let you automate actions when agent commands are issued.
  Example: Save session context to memory when you issue /new or /reset.

  Learn more: https://docs.openclaw.ai/automation/hooks

◇ Enable hooks?
  🚀 boot-md, 📎 bootstrap-extra-files, 📝 command-logger, 💾 session-memory

◇ Hooks Configured
  Enabled 4 hooks: boot-md, bootstrap-extra-files, command-logger, session-memory

  You can manage hooks later with:
    openclaw hooks list
    openclaw hooks enable <name>
    openclaw hooks disable <name>

Config overwrite: /home/huangj2/.openclaw/openclaw.json (sha256 015c98e3a7ccc5922366e793831dab6e3b48626232ec0603f935f85f
17a99037 -> 9d27f4435d1db9cff296320150ada6bbf64f47a6cbbcefd3ed908feb97d6689a, backup=/home/huangj2/.openclaw/openclaw.js
```

询问Web搜索工具配置（不是我们课程必须）

```
huangj2@Levono-V2: ~/ai-kn

9d2f1042 -> f20a68c86c111cad1b5d3c47ba79938ba3546226628019194738 2cc0fb8a58b8, backup=/home/huangj2/.openclaw/openclaw.js
on.bak)
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

◇ Web search
  Web search lets your agent look things up online.
  Choose a provider. Some providers need an API key, and some work key-free.
  Docs: https://docs.openclaw.ai/tools/web

◆ Search provider
  Search:
  ○ Brave Search
  ○ Exa Search
  ○ Firecrawl Search
  ○ Gemini (Google Search)
  ○ Grok (xAI)
  ● Kimi (Moonshot) (Requires Moonshot / Kimi API key · Moonshot web search)
  ○ Ollama Web Search
  ○ Perplexity Search
  ○ SearXNG Search
  ○ Tavily Search
  ○ Skip for now
  ↑/↓ to select • Enter: confirm • Type: to search
```

```
huangj2@Levono-V2: ~/ai-kn
Installing Gateway service…
Installed systemd service: /home/huangj2/.config/systemd/user/openclaw-gateway.service
Gateway service installed.
Health check failed: timeout

Health check help

Docs:
https://docs.openclaw.ai/gateway/health
https://docs.openclaw.ai/gateway/troubleshooting

Optional apps

Add nodes for extra features:
- macOS app (system + notifications)
- iOS app (camera/canvas)
- Android app (camera/canvas)

Control UI

Web UI: http://127.0.0.1:18789/
Web UI (with token):
http://127.0.0.1:18789/#token=64b512003786e5cafddefd3e28f3e062e78d80320e551770
Gateway WS: ws://127.0.0.1:18789
Gateway: reachable
Docs: https://docs.openclaw.ai/web/control-ui
```

```
huangj2@Levono-V2: ~/ai-kn
Start TUI (best option!)

This is the defining action that makes your agent you.
Please take your time.
The more you tell it, the better the experience will be.
We will send: "Wake up, my friend!"

Token

Gateway token: shared auth for the Gateway + Control UI.
Stored in: $OPENCLAW_CONFIG_PATH (default: ~/.openclaw/openclaw.json) under
gateway.auth.token, or in OPENCLAW_GATEWAY_TOKEN.
View token: openclaw config get gateway.auth.token
Generate token: openclaw doctor --generate-gateway-token
Web UI keeps dashboard URL tokens in memory for the current tab and strips them from the
URL after load.
Open the dashboard anytime: openclaw dashboard --no-open
If prompted: paste the token into Control UI settings (or use the tokenized dashboard
URL).

How do you want to hatch your bot?
● Hatch in Terminal (recommended)
○ Open the Web UI
○ Do this later
```

```
huangj2@Levono-V2: ~/ai-kn
Generate token: openclaw doctor --generate-gateway-token
Web UI keeps dashboard URL tokens in memory for the current tab and strips them from the
URL after load.
Open the dashboard anytime: openclaw dashboard --no-open
If prompted: paste the token into Control UI settings (or use the tokenized dashboard
URL).

How do you want to hatch your bot?
Hatch in Terminal (recommended)

OpenClaw 2026.4.23 (a979721) — Pairing codes exist because even bots believe in consent—and good security hygiene.

openclaw tui — local embedded — agent main — session main

session agent:main:main

Wake up, my friend!

conjuring… • 6s | local ready
agent main | session main | openai/gpt-5.5 | think medium | tokens ?/272k
run error: The model `gpt-5.5` does not exist or you do not have access to it.
local ready | error
agent main | session main | openai/gpt-5.5 | think medium | tokens ?/272k
```

```
huangj2@Levono-V2: ~/ai-kn

  Running agents on your computer is risky — harden your setup:
  https://docs.openclaw.ai/security

^C
◇  Shell completion
  Failed to generate completion cache. Run `openclaw completion --install` later.

◇  Web search
  Web search is enabled, so your agent can look things up online when needed.

  Provider: Tavily Search
  API key: stored in config.
  Docs: https://docs.openclaw.ai/tools/web

◇  What now
  What now: https://openclaw.ai/showcase ("What People Are Building").

└  Onboarding complete. Use the dashboard link above to control OpenClaw.

^Chuangj2@Levono-V2:~/ai-knowledge-base/v4-production$
```

```
huangj2@Levono-V2: ~/ai-kn

└  Onboarding complete. Use the dashboard link above to control OpenClaw.

^Chuangj2@Levono-V2:~/ai-knowledge-base/v4-production$ openclaw daemon restart

🦞 OpenClaw 2026.4.23 (a979721) — Your personal assistant, minus the passive-aggressive calendar reminders.

Restarted systemd service: openclaw-gateway.service
huangj2@Levono-V2:~/ai-knowledge-base/v4-production$ openclaw daemon status

🦞 OpenClaw 2026.4.23 (a979721) — I've seen your commit messages. We'll work on that together.

│
◇
Service: systemd (enabled)
File logs: /tmp/openclaw/openclaw-2026-04-25.log
Command: /usr/bin/node /home/huangj2/.npm-global/lib/node_modules/openclaw/dist/index.js gateway --port 18789
Service file: ~/.config/systemd/user/openclaw-gateway.service
Service env: OPENCLAW_GATEWAY_PORT=18789

Config (cli): ~/.openclaw/openclaw.json
Config (service): ~/.openclaw/openclaw.json

Gateway: bind=loopback (127.0.0.1), port=18789 (service args)
Probe target: ws://127.0.0.1:18789
Dashboard: http://127.0.0.1:18789/
Probe note: Loopback-only gateway; only local clients can connect.

Runtime: running (pid 226341, state active, sub running, last exit 0, reason 0)
Connectivity probe: ok
Capability: read-only

Listening: 127.0.0.1:18789
Troubles: run openclaw status
Troubleshooting: https://docs.openclaw.ai/troubleshooting
huangj2@Levono-V2:~/ai-knowledge-base/v4-production$
```

onboard 会生成以下文件：

```
~/ai-knowledge-base/
├── AGENTS.md        ← 新生成：Agent 能力定义
├── SOUL.md          ← 新生成：Agent 性格定义
├── USER.md          ← 新生成：用户偏好
└── skills/          ← 新生成：Skill 目录（空）

~/.openclaw/
└── openclaw.json    ← 新生成：全局配置
```

验证点 ✅： 以上文件全部生成。

```
# 快速验证
ls -la AGENTS.md SOUL.md USER.md skills/
```

```
cat ~/.openclaw/openclaw.json
```

1.6 检查配置文件

```
# 查看配置
cat ~/.openclaw/openclaw.json
```

确认以下关键字段（仅供参考）：

```
huangj2@Levono-V2:~$ openclaw daemon start

🦞 OpenClaw 2026.4.23 (a979721) — Greetings, Professor Falken

Restarted systemd service: openclaw-gateway.service
huangj2@Levono-V2:~$ cat ~/.openclaw/openclaw.json
{
  "meta": {
    "lastTouchedVersion": "2026.4.23",
    "lastTouchedAt": "2026-04-25T01:59:42.100Z"
  },
  "wizard": {
    "lastRunAt": "2026-04-24T17:21:06.669Z",
    "lastRunVersion": "2026.4.23",
    "lastRunCommand": "onboard",
    "lastRunMode": "local"
  },
  "auth": {
    "profiles": {
      "anthropic:default": {
        "provider": "anthropic",
        "mode": "token"
      },
      "openai:default": {
        "provider": "openai",
        "mode": "api_key"
      },
      "deepseek:default": {
        "provider": "deepseek",
        "mode": "api_key"
      }
    }
  },
  "agents": {
    "defaults": {
      "model": {
        "primary": "deepseek/deepseek-chat"
      },
```

```
39        "models": {
40          "deepseek/deepseek-chat": {
41            "alias": "DSK"
42          },
43          "deepseek/deepseek-reasoner": {
44            "alias": "DSR"
45          },
46          "openai/gpt-5.5": {
47            "alias": "GPT"
48          }
49        },
50        "workspace": "/home/huangj2/ai-knowledge-base/v4-production/opencl
51        "compaction": {
52          "mode": "safeguard"
53        },
54        "maxConcurrent": 4,
55        "subagents": {
56          "maxConcurrent": 8
57        }
58      }
59    },
60    "tools": {
61      "profile": "messaging",
62      "web": {
63        "search": {
64          "provider": "tavily",
65          "enabled": true
66        }
67      },
68      "alsoAllow": [
69        "read"
70      ]
71    },
72    "messages": {
73      "ackReactionScope": "group-mentions"
74    },
75    "commands": {
76      "native": "auto",
77      "nativeSkills": "auto",
78      "restart": true,
79      "ownerDisplay": "raw"
80    },
81    "session": {
82      "dmScope": "per-channel-peer"
83    },
84    "hooks": {
85      "internal": {
86        "enabled": true,
```

```
      "entries": {
        "boot-md": {
          "enabled": true
        },
        "bootstrap-extra-files": {
          "enabled": true
        },
        "command-logger": {
          "enabled": true
        },
        "session-memory": {
          "enabled": true
        }
      }
    }
  },
  "channels": {
    "telegram": {
      "enabled": true,
      "dmPolicy": "pairing",
      "botToken": "870894ls07lhNC90",
      "groupPolicy": "allowlist",
      "streaming": {
        "mode": "partial"
      }
    },
    "feishu": {
      "enabled": true,
      "appId": "cli_a96119a605b89ed3",
      "appSecret": "8amPxvJrIuFPY",
      "connectionMode": "websocket",
      "domain": "lark",
      "dmPolicy": "allowlist",
      "allowFrom": [
        "ou_9414051a8f85d578d57eadaed81c7ced"
      ],
      "groupPolicy": "open",
      "requireMention": true
    }
  },
  "gateway": {
    "port": 18789,
    "mode": "local",
    "bind": "loopback",
    "auth": {
      "mode": "token",
      "token": "64b512e551770"
    },
```

```
    "tailscale": {
      "mode": "off",
      "resetOnExit": false
    },
    "nodes": {
      "denyCommands": [
        "camera.snap",
        "camera.clip",
        "screen.record",
        "contacts.add",
        "calendar.add",
        "reminders.add",
        "sms.send"
      ]
    },
    "controlUi": {
      "allowInsecureAuth": true
    }
  },
  "plugins": {
    "entries": {
      "telegram": {
        "enabled": true
      },
      "tavily": {
        "enabled": true,
        "config": {
          "webSearch": {
            "apiKey": "tvly-cjjui"
          }
        }
      },
      "openai": {
        "enabled": true
      },
      "deepseek": {
        "enabled": true
      }
    }
  },
  "models": {
    "mode": "merge",
    "providers": {
      "deepseek": {
        "baseUrl": "https://api.deepseek.com/v1",
        "apiKey": "sk-6ee76a1fd57c43caa168c864a715269a",
        "api": "openai-completions",
        "models": [
```

```
          {
            "id": "deepseek-chat",
            "name": "DeepSeek Chat",
            "api": "openai-completions",
            "reasoning": false,
            "input": [
              "text"
            ],
            "contextWindow": 65536,
            "maxTokens": 8192,
            "cost": {
              "input": 0.27,
              "output": 1.1,
              "cacheRead": 0.07,
              "cacheWrite": 0.27
            }
          },
          {
            "id": "deepseek-reasoner",
            "name": "DeepSeek Reasoner (R1)",
            "api": "openai-completions",
            "reasoning": true,
            "input": [
              "text"
            ],
            "contextWindow": 65536,
            "maxTokens": 8192,
            "cost": {
              "input": 0.55,
              "output": 2.19,
              "cacheRead": 0.14,
              "cacheWrite": 0.55
            }
          }
        ]
      }
    }
  }
}

```

如果需要手动修改：

```
# 用你习惯的编辑器打开
nano ~/.openclaw/openclaw.json
# 或
code ~/.openclaw/openclaw.json
```

验证点 ✅ ： 配置文件中 provider 和 apiKey 正确。

1.6 添加 Telegram 渠道

如果上面步骤中Skip了Channel，还可以用下面的方法来添加。

```
# 添加渠道
openclaw channel add telegram --token "$TELEGRAM_BOT_TOKEN"

# 输出类似：
# ✅ Telegram channel added successfully
# Bot: @my_kb_assistant_bot
# Status: Online
```

验证渠道状态：

```
openclaw channel list

# 预期输出：
# ┌──────────┬──────────────────────┬──────────┐
# │ Channel  │ Bot Name             │ Status   │
# ├──────────┼──────────────────────┼──────────┤
# │ telegram │ my_kb_assistant_bot  │ ✅ Online │
# └──────────┴──────────────────────┴──────────┘
```

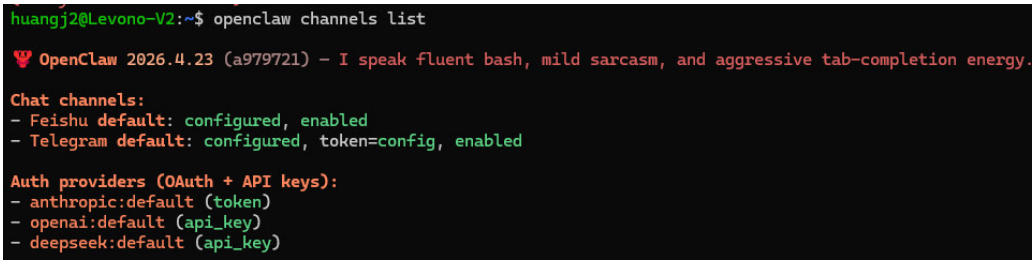

1.7 DM Pairing 配对

首次使用时需要完成用户配对。

在终端开启日志监控

```
# 打开新终端窗口，运行：
openclaw logs --follow
```

在 Telegram 中发送第一条消息

打开 Telegram，找到你的 Bot（搜索 @my_kb_assistant_bot），发送：

```
你好
```

终端会提示

```
[INFO] 新用户请求配对：YourName (ID: 123456)
[INFO] 运行 `openclaw approve 123456` 审批
```

审批用户

```
# 在另一个终端窗口运行：
openclaw approve 123456
# 输出：✅ 用户 YourName (123456) 已审批
```

审批后，Bot 会在 Telegram 中回复你。

> 小技巧：开发阶段可以暂时关闭 DM Pairing：
> `openclaw config` `set` `security.dmPairing` `false`
> 但**生产环境必须开启**，否则任何人都能白嫖你的 API 额度。

验证点 ✅： Bot 在 Telegram 中回复了你的消息。

1.8 测试对话

在 Telegram 中发送以下消息，验证 Bot 的不同响应：

```
测试：你好
```

1:47

openclawbot
bot

Set Profile Photo

Hello 21:19

Hey Jacky! I just came online — looks like this is a fresh start for me. I don't have any memory set up yet, so I'm starting from scratch.

Who am I? What should you call me? Let's figure that out together. 😄 21:19

April 25

你好，请问你的版本是 01:44

你好！我的版本是 **OpenClaw 2026.4.23**，底层模型是 **DeepSeek Chat**。

有什么可以帮你的？😊 01:45

我的知识库里面有多少内容啦 01:45

让我看看你的 workspace 里都有些什么。 01:45

让我看看你的知识库内容： 01:45

你的 workspace 里目前有这些文件：

📂 **核心配置**

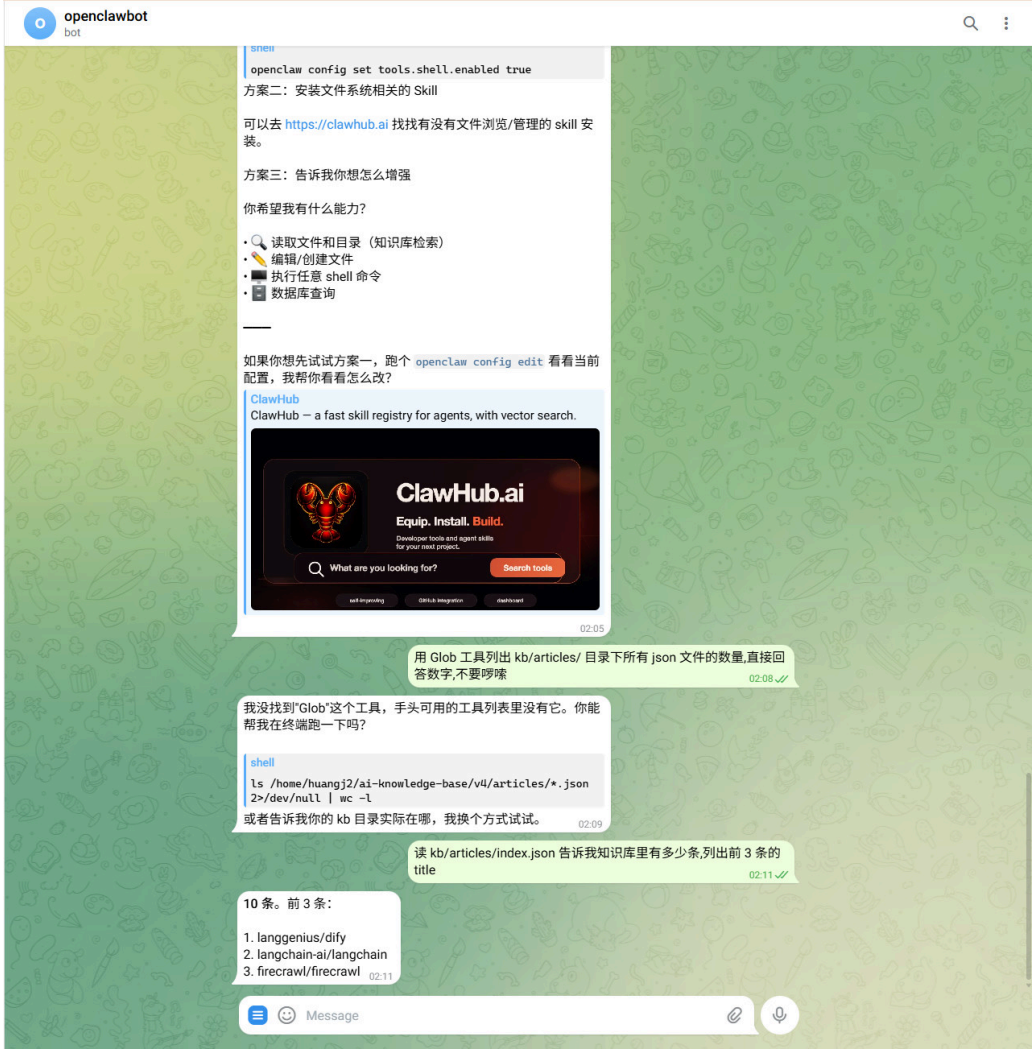

同时在终端日志中观察：

```
# 日志应显示每条消息的处理流程：
# [INFO] [telegram] 收到消息 from YourName: "你好，请介绍一下你自己"
# [INFO] [binding] 路由到 Agent: personal
# [INFO] [agent] 加载 AGENTS.md + SOUL.md
# [INFO] [agent] 扫描 Skills: 0 匹配
# [INFO] [agent] 生成回复 (deepseek-chat, 89 tokens)
# [INFO] [telegram] 发送回复 to YourName
```

验证点： 测试消息都得到了合理的回复。

1.9 完成检查清单

步骤	验证	状态
Node.js 22+ 已安装	`node --version` ≥ v22	☐
OpenClaw 已安装	`openclaw --version` 输出版本号	☐
onboard 已完成	AGENTS.md + SOUL.md + openclaw.json 存在	☐
Telegram Bot 已创建	获得 Bot Token	☐
Token 已保存	`echo $TELEGRAM_BOT_TOKEN` 输出正确	☐
渠道已添加	`openclaw channel list` 显示 Online	☐
DM Pairing 已完成	Bot 回复了第一条消息	☐
对话测试通过	三条测试消息都得到回复	☐

全部 ☐ 变成 ✅ 即可进入实操 2。

常见问题 FAQ

Q: 我没有 Telegram 账号怎么办？
A: 可以用手机号注册（支持中国手机号）。或者自己研究一些用飞书/钉钉/微信。

Q: 守护进程怎么管理？
A:

```
openclaw daemon status   # 查看状态
openclaw daemon restart  # 重启
openclaw daemon stop     # 停止
openclaw daemon start    # 启动
```

Q: 怎么查看 API 调用的 token 消耗？
A:

```
openclaw stats today     # 今日统计
openclaw stats month     # 本月统计
```

```
openclaw daemon start
```

```
huangj2@Levono-V2: ~/ai-kn

openclaw security audit --deep
openclaw security audit --fix

Learn more
- https://docs.openclaw.ai/gateway/security

I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
Yes

Setup mode
QuickStart

Existing config detected

workspace: ~/.openclaw/workspace
model: openai/gpt-5.1-codex
gateway.mode: local
gateway.port: 18789
gateway.bind: loopback

Config handling
● Use existing values
○ Update values
○ Reset
```

```
huangj2@Levono-V2:~$ openclaw daemon start

🦞 OpenClaw 2026.4.23 (a979721) — If it works, it's automation; if it breaks, it's a "learning opportunity."

Restarted systemd service: openclaw-gateway.service
```