

# Correlaciones

A. Shantal Hernández

2022-06-27

#Utilidad

Esta metodología sirve para identificar la relación entre dos variables de tipo **cuantitativo**. Los datos se distribuyen de forma normal. Area: Estadística Paramétrica y se utiliza la matriz “penguins.xlsx” como ejemplo.

## Librerías

```
library(readxl)
```

```
penguins<-read_excel("penguins.xlsx")
```

#Exploración de variables

1.- Dimensión

```
dim(penguins)
```

```
## [1] 344 9
```

2.- Tipos de variables

```
str(penguins)
```

```
## tibble [344 x 9] (S3: tbl_df/tbl/data.frame)
## $ ID          : chr [1:344] "i1" "i2" "i3" "i4" ...
## $ especie     : chr [1:344] "Adelie" "Adelie" "Adelie" "Adelie" ...
## $ isla        : chr [1:344] "Torgersen" "Torgersen" "Torgersen" "Torgersen" ...
## $ largo_pico_mm : num [1:344] 39.1 39.5 40.3 37.8 36.7 39.3 38.9 39.2 34.1 42 ...
## $ grosor_pico_mm : num [1:344] 18.7 17.4 18 18.1 19.3 20.6 17.8 19.6 18.1 20.2 ...
## $ largo_aleta_mm : num [1:344] 181 186 195 190 193 190 181 195 193 190 ...
## $ masa_corporal_g: num [1:344] 3750 3800 3250 3700 3450 ...
## $ genero      : chr [1:344] "male" "female" "female" "female" ...
## $ año         : num [1:344] 2007 2007 2007 2007 2007 ...
```

3.- Identificar la especie Adelie

```
penguins$especie
```

```
## [1] "Adelie" "Adelie" "Adelie" "Adelie" "Adelie" "Adelie"
## [7] "Adelie" "Adelie" "Adelie" "Adelie" "Adelie" "Adelie"
## [13] "Adelie" "Adelie" "Adelie" "Adelie" "Adelie" "Adelie"
## [19] "Adelie" "Adelie" "Adelie" "Adelie" "Adelie" "Adelie"
## [25] "Adelie" "Adelie" "Adelie" "Adelie" "Adelie" "Adelie"
## [31] "Adelie" "Adelie" "Adelie" "Adelie" "Adelie" "Adelie"
## [37] "Adelie" "Adelie" "Adelie" "Adelie" "Adelie" "Adelie"
```

[illegible]

4.- Seleccionar las observaciones de la 1 a la 152 y las variables cuantitativas.

```
colnames(penguins)
```

```
## [1] "ID"           "especie"       "isla"          "largo_pico_mm"  
## [5] "grosor_pico_mm" "largo_aleta_mm" "masa_corporal_g" "genero"  
## [9] "año"
```

```
adeli<-penguins[1:152,4:7]
```

verificación de la matriz

```
str(adeli)
```

```
## tibble [152 x 4] (S3: tbl_df/tbl/data.frame)  
## $ largo_pico_mm : num [1:152] 39.1 39.5 40.3 37.8 36.7 39.3 38.9 39.2 34.1 42 ...  
## $ grosor_pico_mm : num [1:152] 18.7 17.4 18 18.1 19.3 20.6 17.8 19.6 18.1 20.2 ...  
## $ largo_aleta_mm : num [1:152] 181 186 195 190 193 190 181 195 193 190 ...  
## $ masa_corporal_g: num [1:152] 3750 3800 3250 3700 3450 ...
```


## Metodologia

1.- Cálculo de correlación

```
cor_adeli<-cor(adeli)
```

2.-Realización del plot de correlaciones

```
plot(adeli)
```

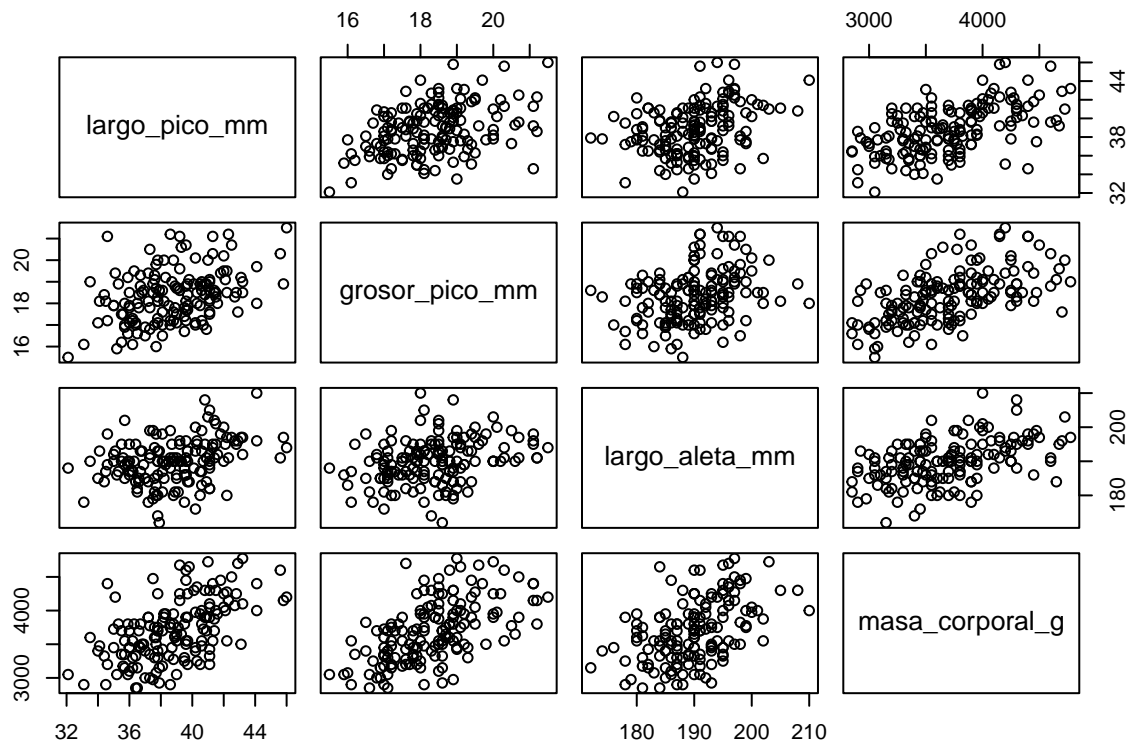

3.- Organización de la tabla de correlaciones

librerías

```
library(knitr)
```

organización

```
kable(cor_adeli)
```

	largo_pico_mm	grosor_pico_mm	largo_aleta_mm	masa_corporal_g
largo_pico_mm	1.0000000	0.3917580	0.3256178	0.5486177
grosor_pico_mm	0.3917580	1.0000000	0.3075689	0.5760619
largo_aleta_mm	0.3256178	0.3075689	1.0000000	0.4682015
masa_corporal_g	0.5486177	0.5760619	0.4682015	1.0000000

#Correlaciones de Spearman

```
marvel<-read_excel("marvel.xlsx")
```

## 1.- Identificar las variables cuantitativas

```
str(marvel)
```

```
## tibble [39 x 11] (S3: tbl_df/tbl/data.frame)
##  $ ID          : num [1:39] 1 2 3 4 5 6 7 8 9 10 ...
##  $ Original Title : chr [1:39] "Iron Man" "The Incredible Hulk" "Iron Man 2" "Thor" ...
##  $ Company      : chr [1:39] "Marvel" "Marvel" "Marvel" "Marvel" ...
##  $ Rate         : num [1:39] 7.9 6.7 7 7 6.9 8 7.2 6.9 7.7 8 ...
##  $ Metascore     : num [1:39] 79 61 57 57 66 69 62 54 70 76 ...
##  $ Minutes      : chr [1:39] "126" "112 " "124 " "115" ...
##  $ Release       : num [1:39] 2008 2008 2010 2011 2011 ...
##  $ Budget        : chr [1:39] "140000000" "150000000" "200000000" "150000000 " ...
##  $ Opening Weekend USA: num [1:39] 9.86e+07 5.54e+07 1.28e+08 6.57e+07 6.51e+07 ...
##  $ Gross USA     : num [1:39] 3.19e+08 1.35e+08 3.12e+08 1.81e+08 1.77e+08 ...
##  $ Gross Worldwide : num [1:39] 5.85e+08 2.63e+08 6.24e+08 4.49e+08 3.71e+08 ...
```

## 2.- Nombre y posición de la variable

```
colnames(marvel)
```

```
## [1] "ID"          "Original Title"  "Company"
## [4] "Rate"        "Metascore"      "Minutes"
## [7] "Release"     "Budget"         "Opening Weekend USA"
## [10] "Gross USA"    "Gross Worldwide"
```

## 3.- Seleccionar las variables:

rate, minutos, budget y gross.worldwide

```
marvel<-marvel[,c(4,6,8,11)]
```

#### 4.- Verificar que el nombre de las variables esten correctas

```
colnames(marvel)
```

```
## [1] "Rate"           "Minutes"        "Budget"         "Gross Worldwide"
```

#### 5.- Realizar un plot de exploracion

```
plot(marvel)
```

