

Nama : Shanti Alya Paramita


NIM : 12030123140346

Kelas : F


PENKODEAN DAN PEMROGRAMAN

TUGAS W3Schools and Landing Page Website Aplikasi


1. Gunakan bantuan AI seperti Grok untuk membuat kode yang dibutuhkan.

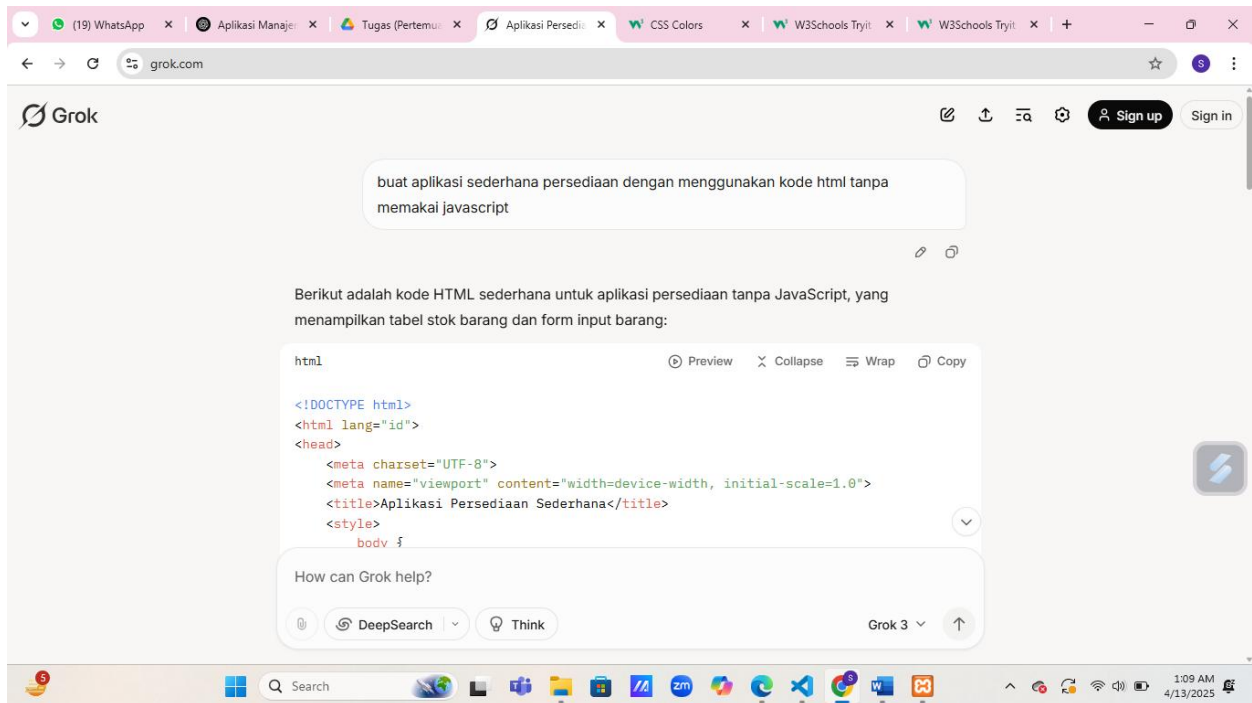

2. Buka situs W3Schools, pilih menu HTML, lalu klik tombol Try it Yourself.
3. Salin seluruh kode yang dihasilkan AI, dan tempelkan ke area editor yang tersedia di W3Schools.
4. Klik tombol Run, dan hasil tampilan akan muncul di sebelah kanan layar.

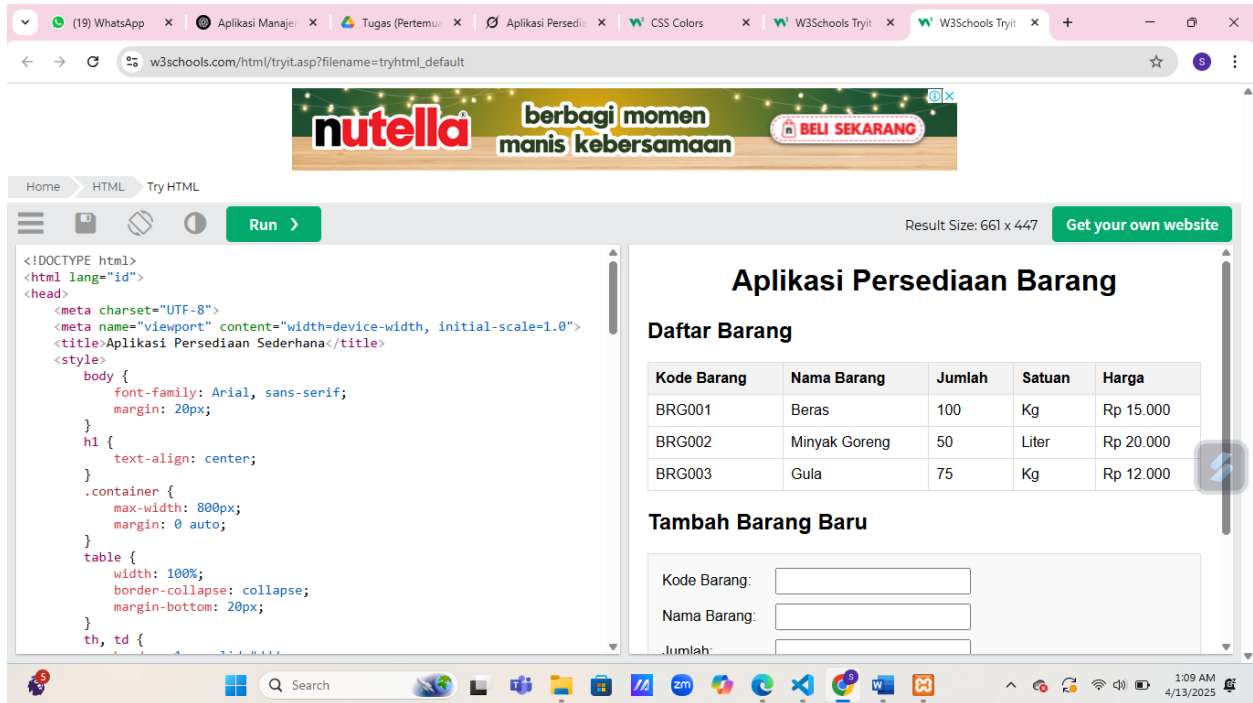

5. Jika ingin mempercantik tampilan, kembali ke AI dan minta modifikasi sesuai keinginan.

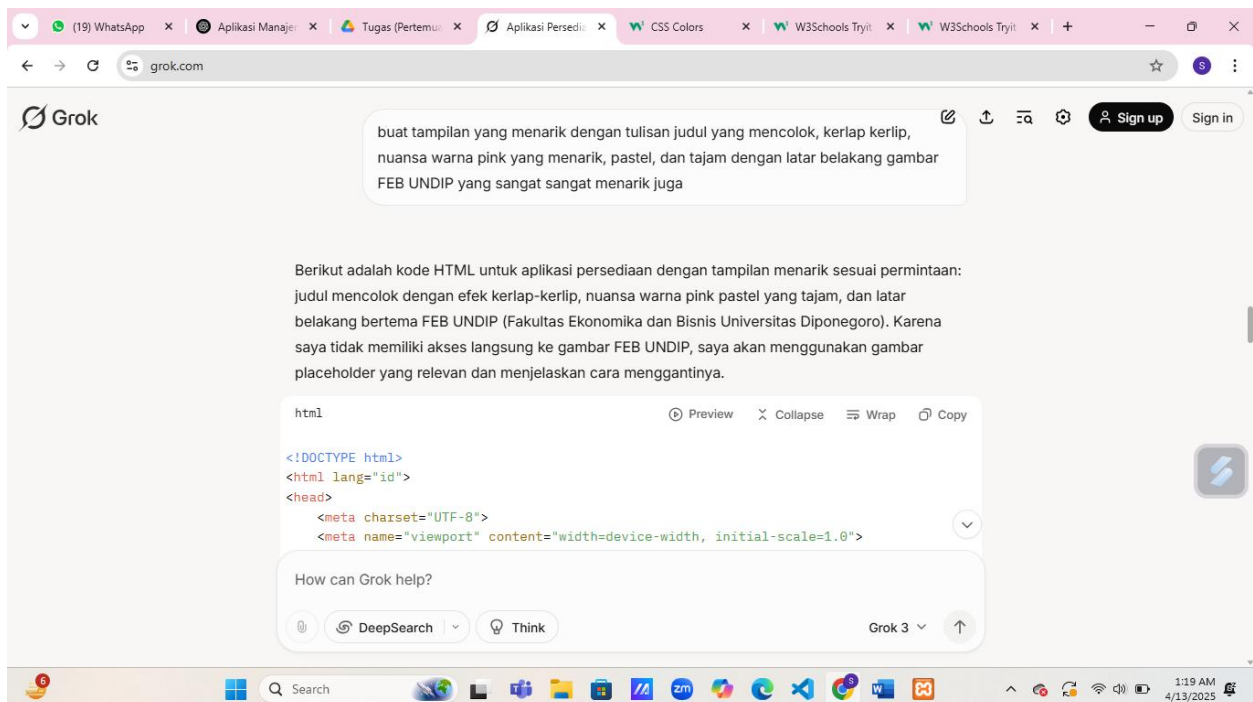

6. Salin kode hasil modifikasi ke editor W3Schools, klik Run lagi, dan tampilan baru akan muncul di sisi kanan.

The screenshot shows the W3Schools Tryit editor interface. The top navigation bar includes links to Home, HTML, and Try HTML. The editor area on the left contains the following HTML code:

```
<!DOCTYPE html>
<html lang="id">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Aplikasi Persediaan FEB UNDIP</title>
  <style>
    body {
      font-family: 'Segoe UI', Arial, sans-serif;
      margin: 0;
      padding: 0;
      background-image: url('https://images.unsplash.com/photo-1509062522246-3755977927d7?ixlib=rb-4.0.3&auto=format&fit=crop&w=1350&q=80');
      background-size: cover;
      background-attachment: fixed;
      background-position: center;
      color: #333;
    }
    .overlay {
      background: rgba(255, 182, 193, 0.7);
    }
  </style>
</head>
<body>
  <div>
    <h1>Aplikasi Persediaan FEB UNDIP</h1>
    <h2>Daftar Barang</h2>
    <table>
      <thead>
        <tr>
          <th>Kode Barang</th>
          <th>Nama Barang</th>
          <th>Jumlah</th>
          <th>Satuan</th>
          <th>Harga</th>
        </tr>
      </thead>
      <tbody>
        <tr>
          <td>BRG001</td>
          <td>Beras</td>
          <td>100</td>
          <td>Kg</td>
          <td>Rp 15.000</td>
        </tr>
        <tr>
          <td>BRG002</td>
          <td>Minyak Goreng</td>
          <td>50</td>
          <td>Liter</td>
          <td>Rp 20.000</td>
        </tr>
        <tr>
          <td>BRG003</td>
          <td>Gula</td>
          <td>75</td>
          <td>Kg</td>
          <td>Rp 12.000</td>
        </tr>
      </tbody>
    </table>
    <h3>Tambah Barang Baru</h3>
  </div>
  <div>
    <input type="text" value="Kode Barang:">
    <input type="text" value="Nama Barang:">
    <input type="text" value="Jumlah:">
    <input type="text" value="Satuan:">
    <input type="text" value="Harga:">
    <button value="Tambah Barang">
  </div>
</body>
</html>
```

The preview on the right shows a web page with a pink background and a table titled 'Daftar Barang' containing three items: Beras, Minyak Goreng, and Gula. Below the table is a section titled 'Tambah Barang Baru' with input fields for Kode Barang, Nama Barang, Jumlah, Satuan, and Harga, and a 'Tambah Barang' button.

The screenshot shows the W3Schools Tryit editor interface after modification. The editor area on the left contains the following HTML code:

```
<!DOCTYPE html>
<html lang="id">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Aplikasi Persediaan FEB UNDIP</title>
  <style>
    body {
      font-family: 'Segoe UI', Arial, sans-serif;
      margin: 0;
      padding: 0;
      background-image: url('https://images.unsplash.com/photo-1509062522246-3755977927d7?ixlib=rb-4.0.3&auto=format&fit=crop&w=1350&q=80');
      background-size: cover;
      background-attachment: fixed;
      background-position: center;
      color: #333;
    }
    .overlay {
      background: rgba(255, 182, 193, 0.7);
    }
  </style>
</head>
<body>
  <div>
    <h1>Aplikasi Persediaan FEB UNDIP</h1>
    <h2>Tambah Barang Baru</h2>
    <div>
      <div>
        <input type="text" value="Kode Barang:">
        <input type="text" value="Nama Barang:">
        <input type="text" value="Jumlah:">
        <input type="text" value="Satuan:">
        <input type="text" value="Harga:">
        <button value="Tambah Barang">
      </div>
    </div>
  </div>
  <div>
    <input type="text" value="Kode Barang:">
    <input type="text" value="Nama Barang:">
    <input type="text" value="Jumlah:">
    <input type="text" value="Satuan:">
    <input type="text" value="Harga:">
    <button value="Tambah Barang">
  </div>
</body>
</html>
```

The preview on the right shows a web page with a pink background and a section titled 'Tambah Barang Baru' with input fields for Kode Barang, Nama Barang, Jumlah, Satuan, and Harga, and a 'Tambah Barang' button.