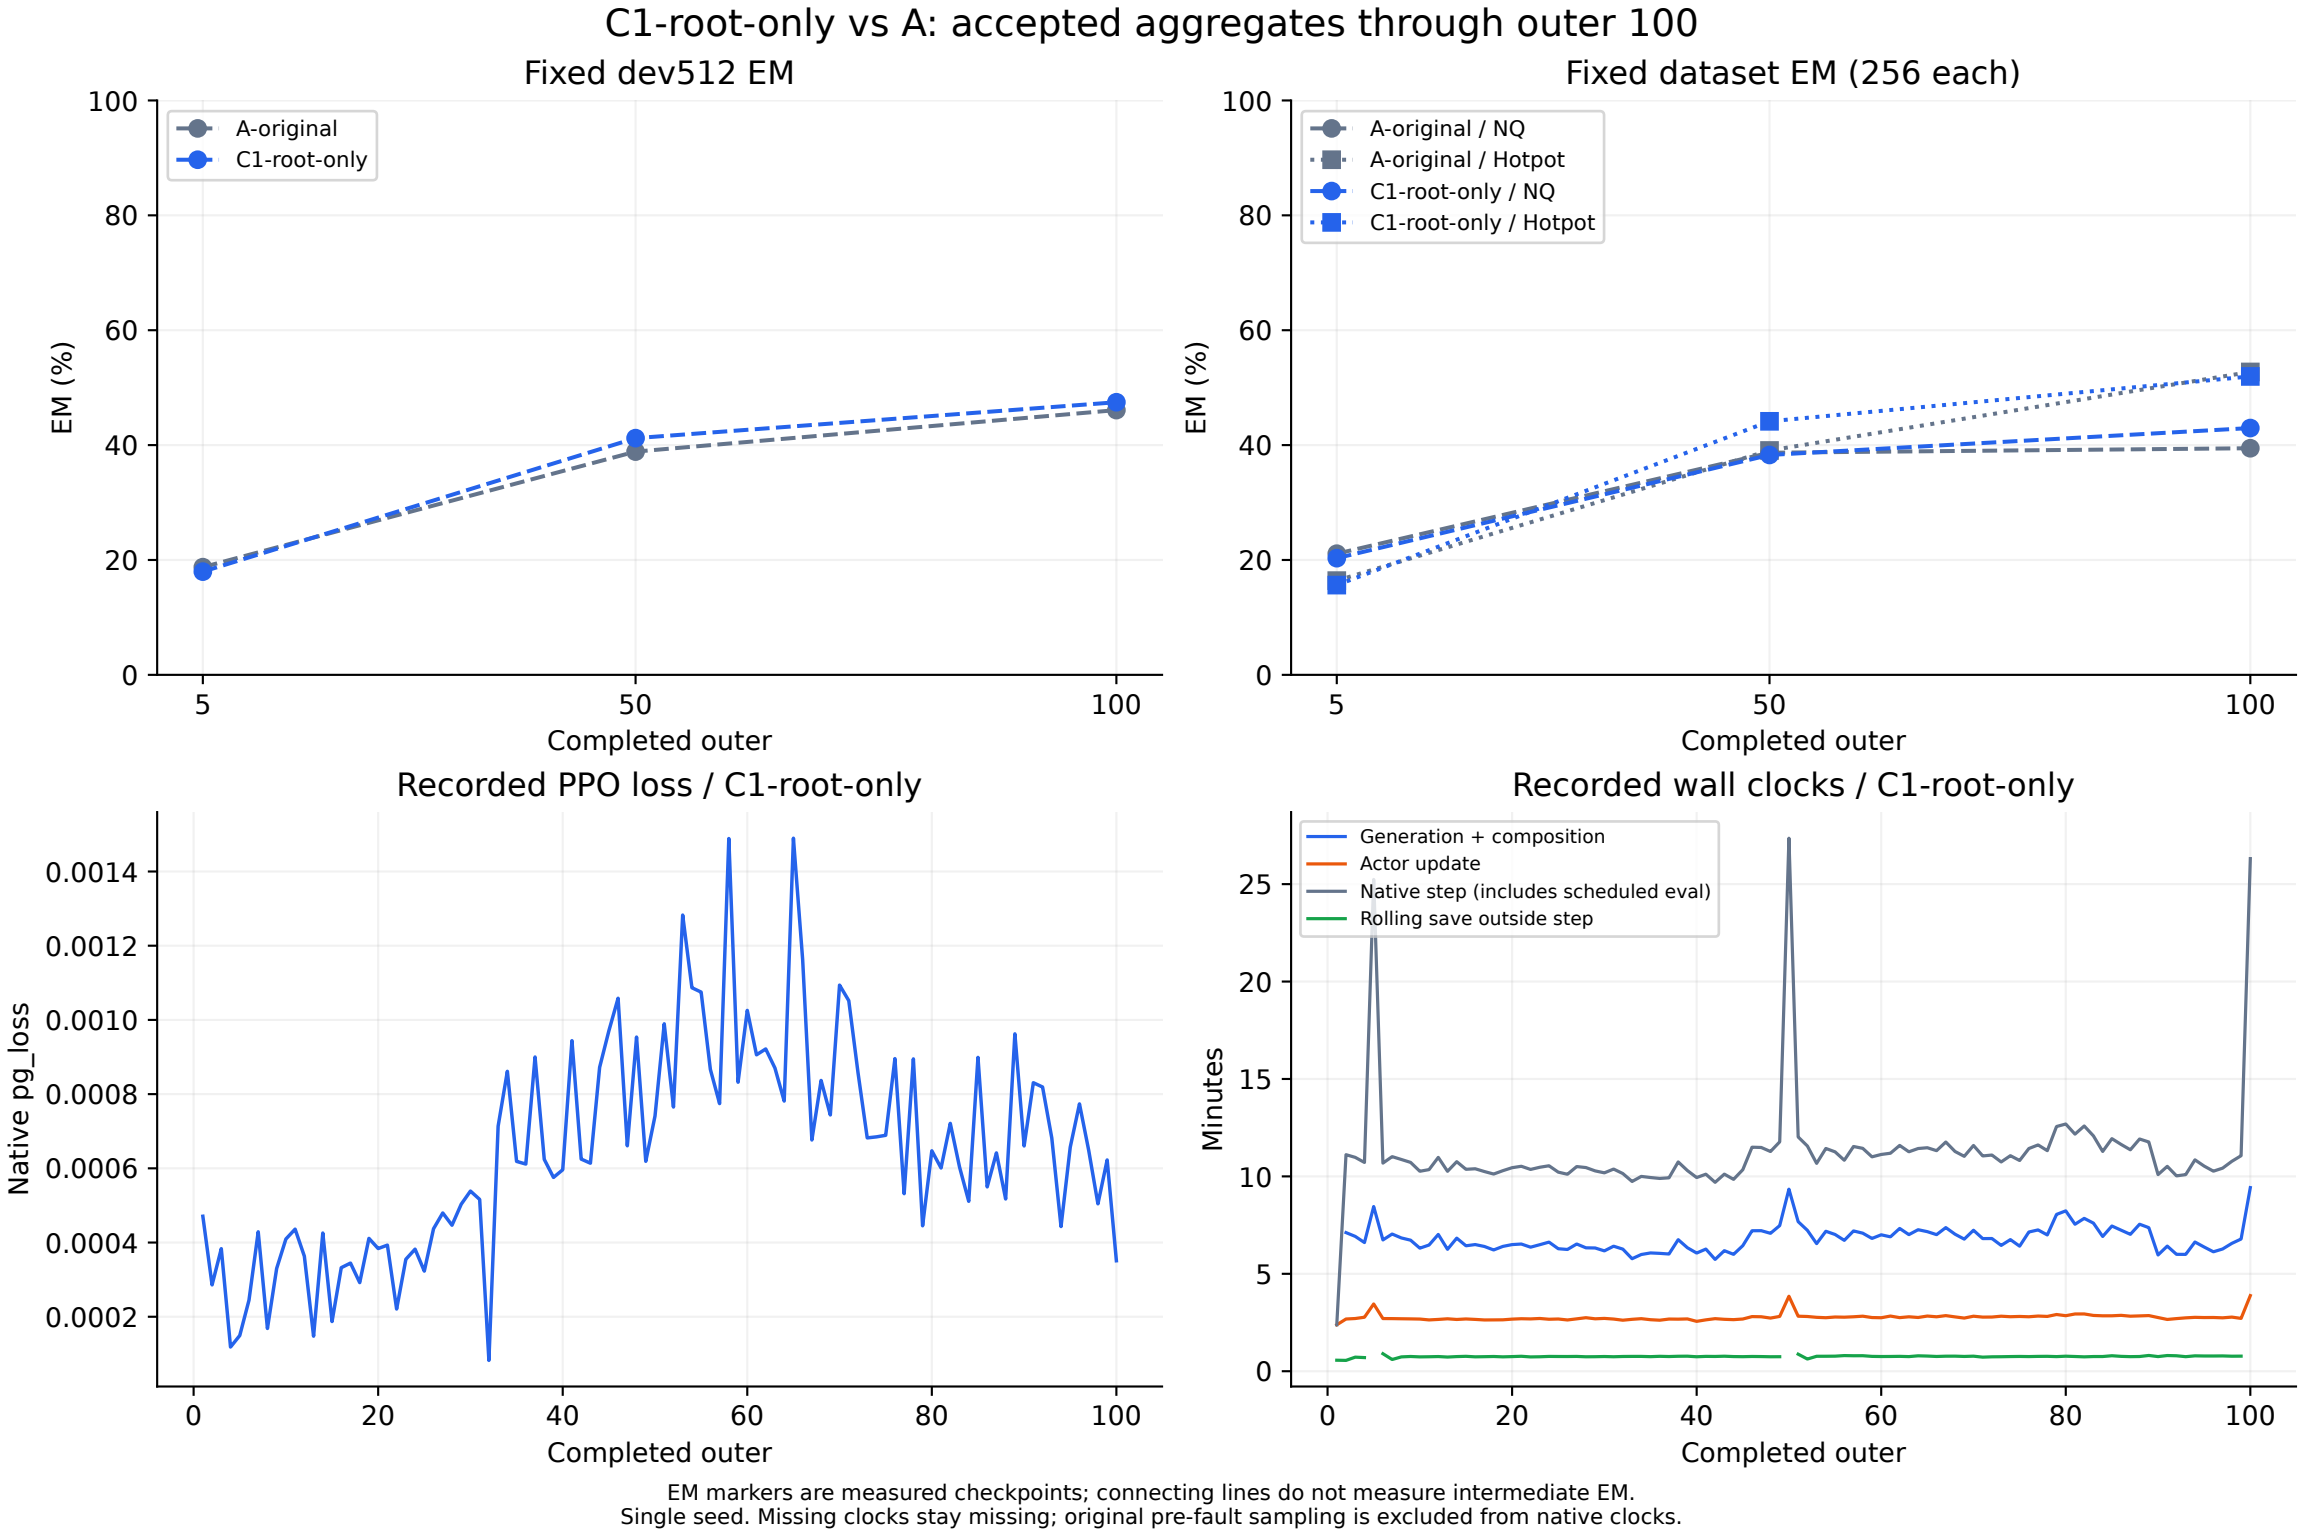
C1-root-only vs A: accepted aggregates through outer 100
Fixed dev512 EM
A-original
C1-root-only
EM (%)
Completed outer
Fixed dataset EM (256 each)
A-original / NQ
A-original / Hotpot
C1-root-only / NQ
C1-root-only / Hotpot
EM (%)
Completed outer
Recorded PPO loss / C1-root-only
Native pg_loss
Completed outer
Recorded wall clocks / C1-root-only
Generation + composition
Actor update
Native step (includes scheduled eval)
Rolling save outside step
Minutes
Completed outer
EM markers are measured checkpoints; connecting lines do not measure intermediate EM.
Single seed. Missing clocks stay missing; original pre-fault sampling is excluded from native clocks.