

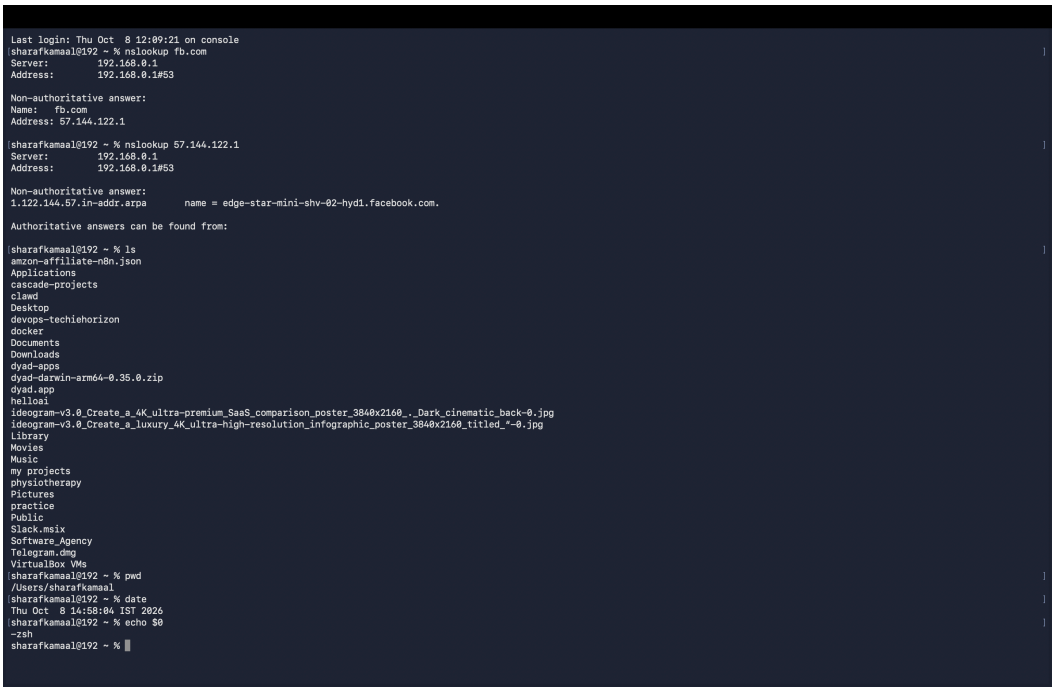



**ls**: Lists the files and directories inside the current or specified folder.
**pwd**: Prints the full pathname of the current working directory.
**date**: Displays or sets the current system date and time.
**echo $0**: Prints the name of the currently running shell or script.

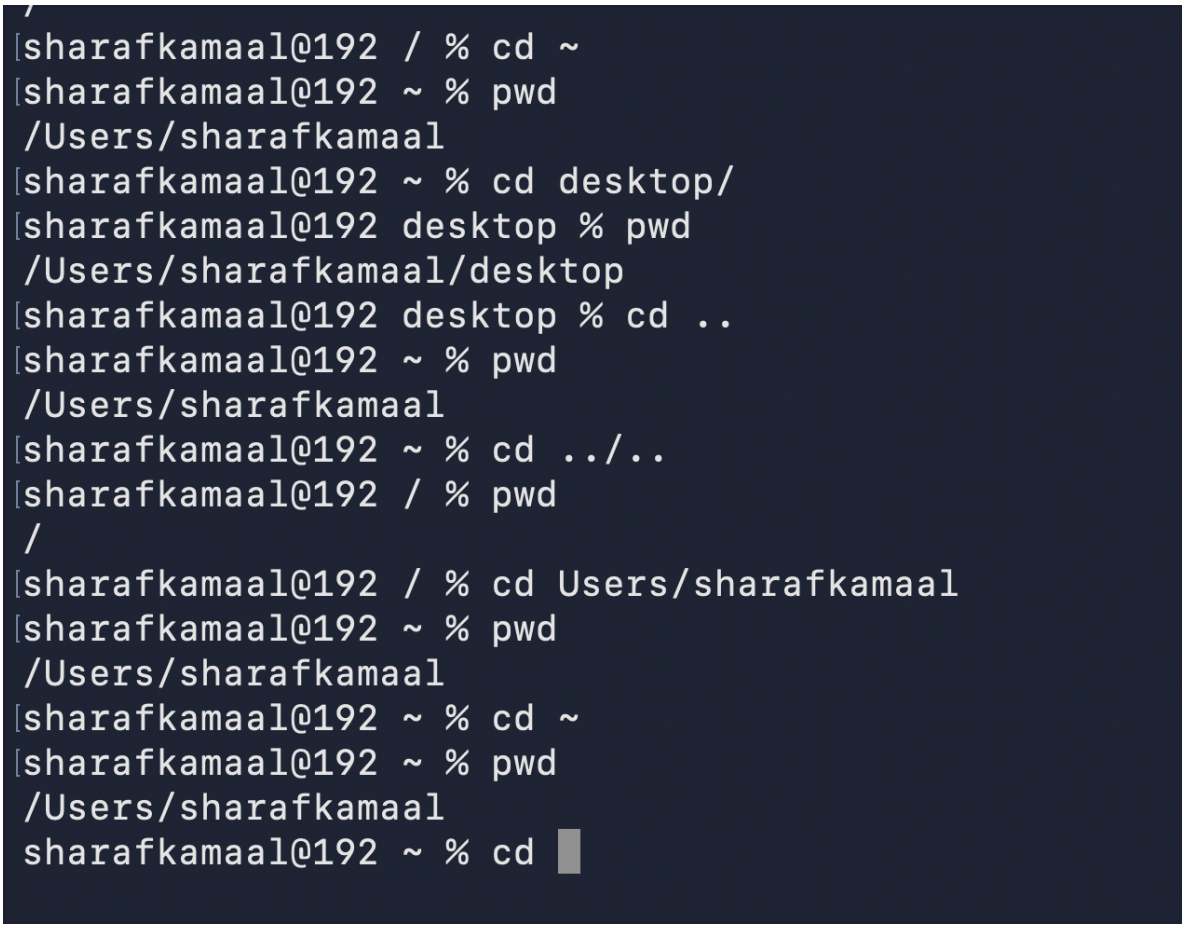



- **/**: The root directory, which is the topmost level of the entire Linux filesystem hierarchy.


- **~**: A shortcut that represents the current logged-in user's home directory (e.g., /home/username).
- **cd**: Changes the current working directory (running it alone without arguments defaults to navigating directly to your home directory ~).
- **cd ..**: Moves up one directory level into the immediate parent directory.
- **cd ../..**: Moves up two directory levels into the parent of the parent directory.

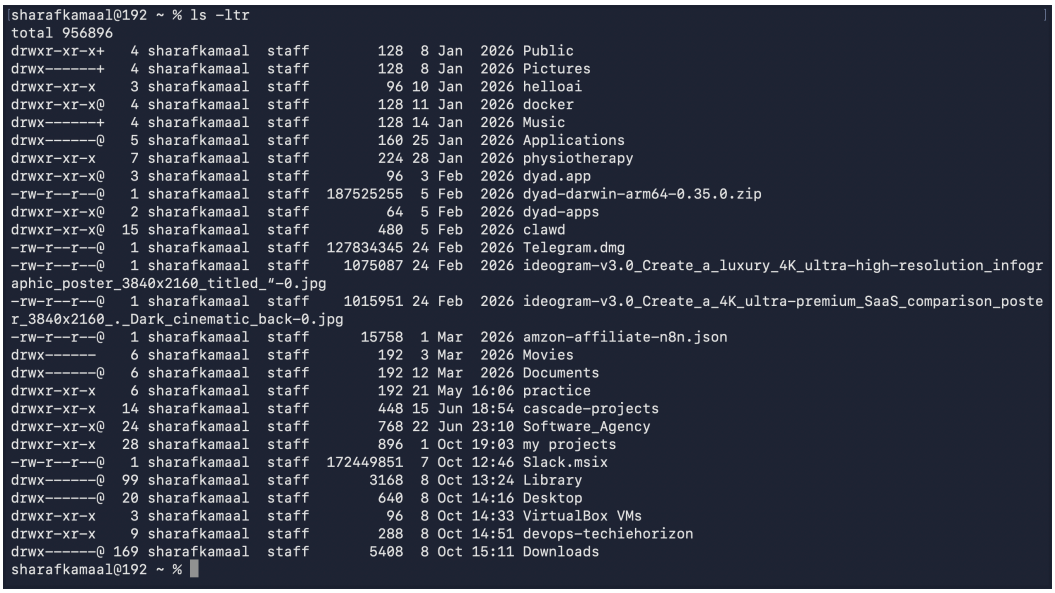


**ls -ltr**: Lists files in long format (-l), sorted by modification time (-t) in reverse order (-r), placing the most recently modified files at the bottom.

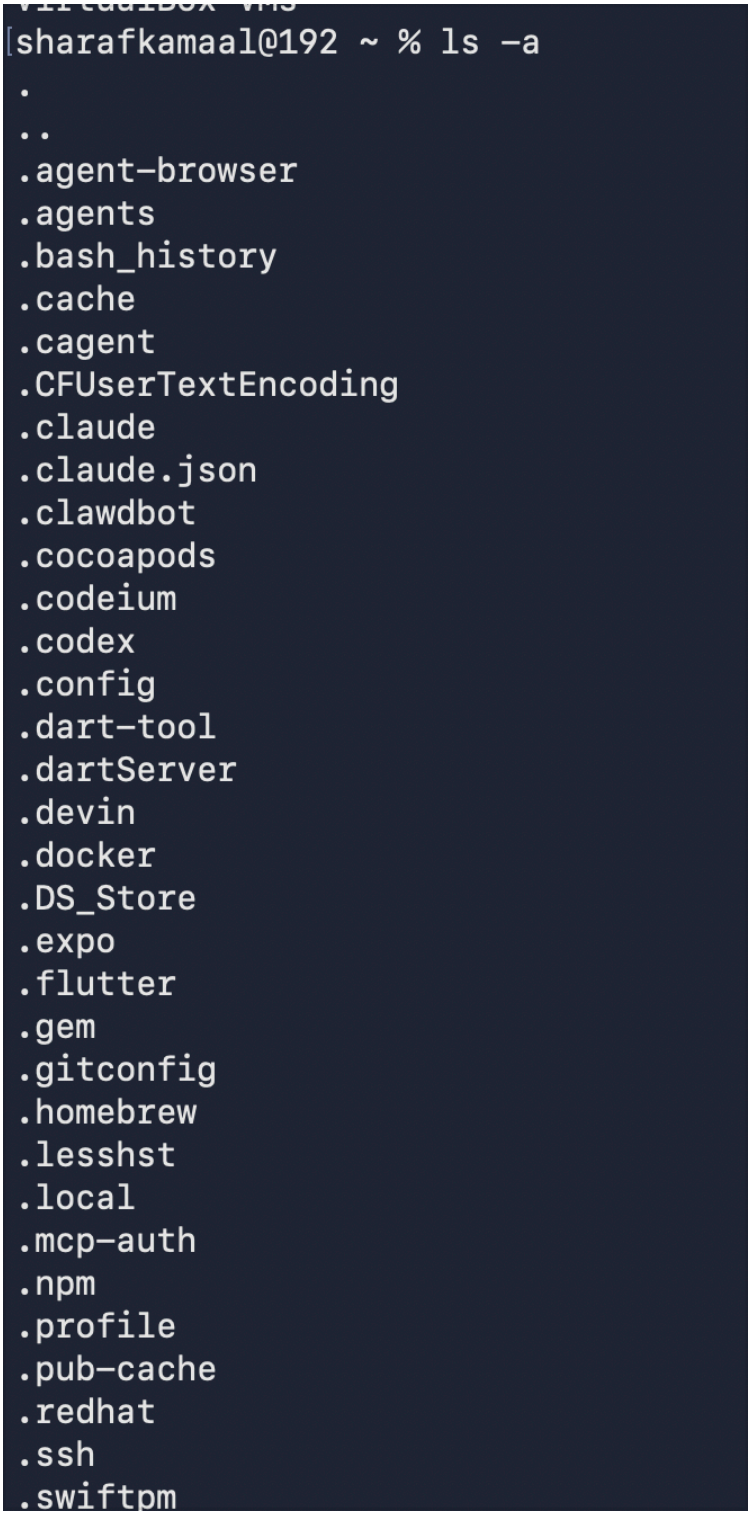


- ls -a: Lists all files and directories in the target directory, including hidden entries that begin with a dot (.).

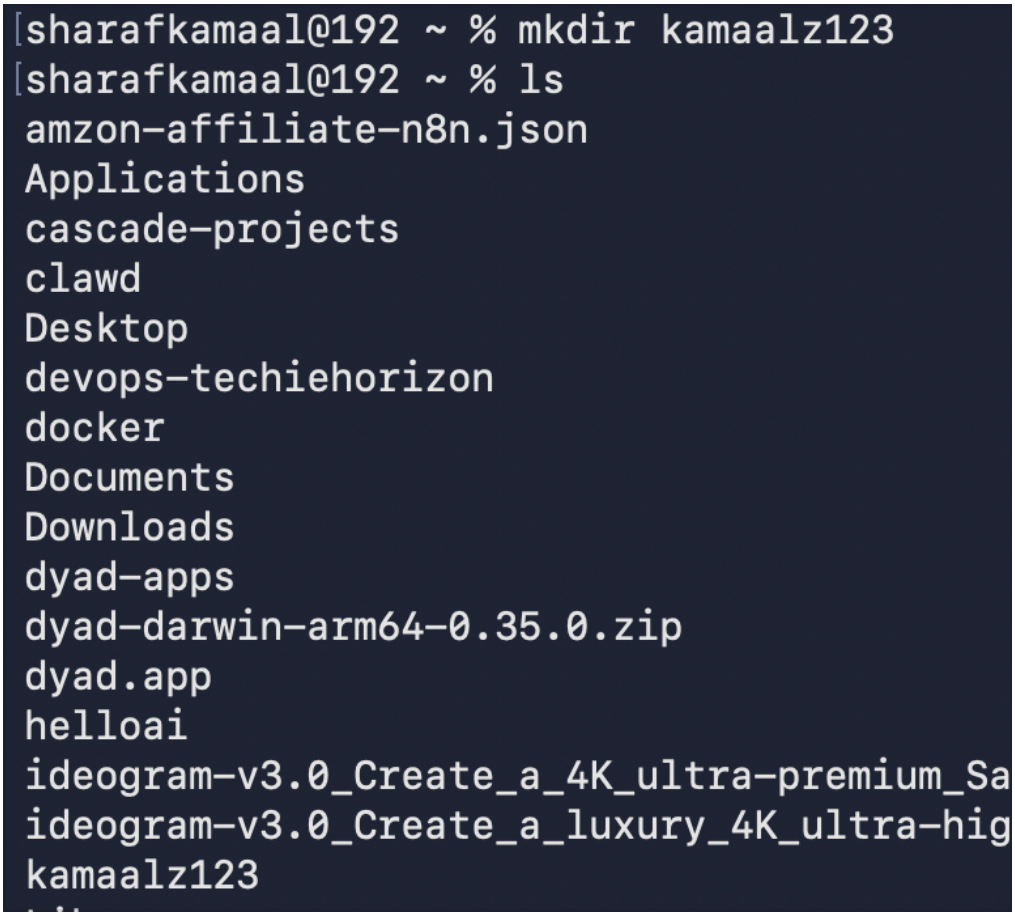


- mkdir: Creates one or more new directories (folders) in the file system.




- mv <source> <dest>: Renames or moves files and directories from <source> to <dest> (running mv . on its own results in an error because it requires at least a source and a destination, and the current

directory . cannot be moved into itself).

```
[sharafkamaal@192 ~ % clear

[sharafkamaal@192 ~ % history
 1032  ls
 1033  ll
 1034  ls -ltr
 1035  ls
 1036  ls -a
 1037  d
 1038  cd ~
 1039  pwd
 1040  ls
 1041  mkdir kamaalz123
 1042  ls
 1043  mv kamaalz123
 1044  mv kamaalz123 .kamaalz123
 1045  ls
 1046  ls -a
 1047  clear
sharafkamaal@192 ~ %
```

- clear: Clears the terminal screen of all previous output, leaving a clean prompt at the top.

- history: Displays the numbered list of previously executed commands in the current shell session.

```
[sharafkamaal@192 ~ % rm -rf kamaalz123
 sharafkamaal@192 ~ %
```

- rm -rf: Forcibly (-f) and recursively (-r) deletes directories and all of their contents without prompting for confirmation.

```
sharafkamaal@192 ~ % rm -rf kamaalz123
sharafkamaal@192 ~ % mkdir kamaalz123
sharafkamaal@192 ~ % pwd
/Users/sharafkamaal
sharafkamaal@192 ~ % cd desktop
sharafkamaal@192 desktop % pwd
/Users/sharafkamaal/desktop
sharafkamaal@192 desktop % cd ..
sharafkamaal@192 ~ % mv kamaalz123 /Users/sharafkamaal/desktop
sharafkamaal@192 ~ % ls
amzon-affiliate-n8n.json
Applications
cascade-projects
clawd
Desktop
devops-techiehorizon
docker
```


- mv: Moves or renames files and directories from a source location to a destination.

```
sharafkamaal@192 desktop % pwd
/Users/sharafkamaal/desktop
sharafkamaal@192 desktop % cp kamaalz123 /Users/sharaf
cp: kamaalz123 is a directory (not copied).
sharafkamaal@192 desktop % cp Kamaalz123 /Users/sharaf
cp: Kamaalz123 is a directory (not copied).
sharafkamaal@192 desktop % cp -r kamaalz123 /Users/sha
sharafkamaal@192 desktop % cd ..
sharafkamaal@192 ~ % ls
amzon-affiliate-n8n.json
Applications
cascade-projects
clawd
Desktop
devops-techiehorizon
docker
Documents
Downloads
dyad-apps
dyad-darwin-arm64-0.35.0.zip
dyad.app
helloai
ideogram-v3.0_Create_a_4K_ultra-premium_SaaS_comparis
ideogram-v3.0_Create_a_luxury_4K_ultra-high-resolutio
kamaalz123
```

- **cp -r**: Copies directories and all their contents recursively from a source to a destination.

```
sharafkamaal@192 ~ % cd kamaalz123
sharafkamaal@192 kamaalz123 % touch 123
sharafkamaal@192 kamaalz123 % ls
123
sharafkamaal@192 kamaalz123 % ll
zsh: command not found: ll
sharafkamaal@192 kamaalz123 % vi 123
sharafkamaal@192 kamaalz123 % vi 123
sharafkamaal@192 kamaalz123 % vi world
sharafkamaal@192 kamaalz123 %
```

- **touch**: Creates a new, empty file if it doesn't exist, or updates the timestamp of an existing file.
- **vi**: Opens the standard command-line text editor to view or edit text files.

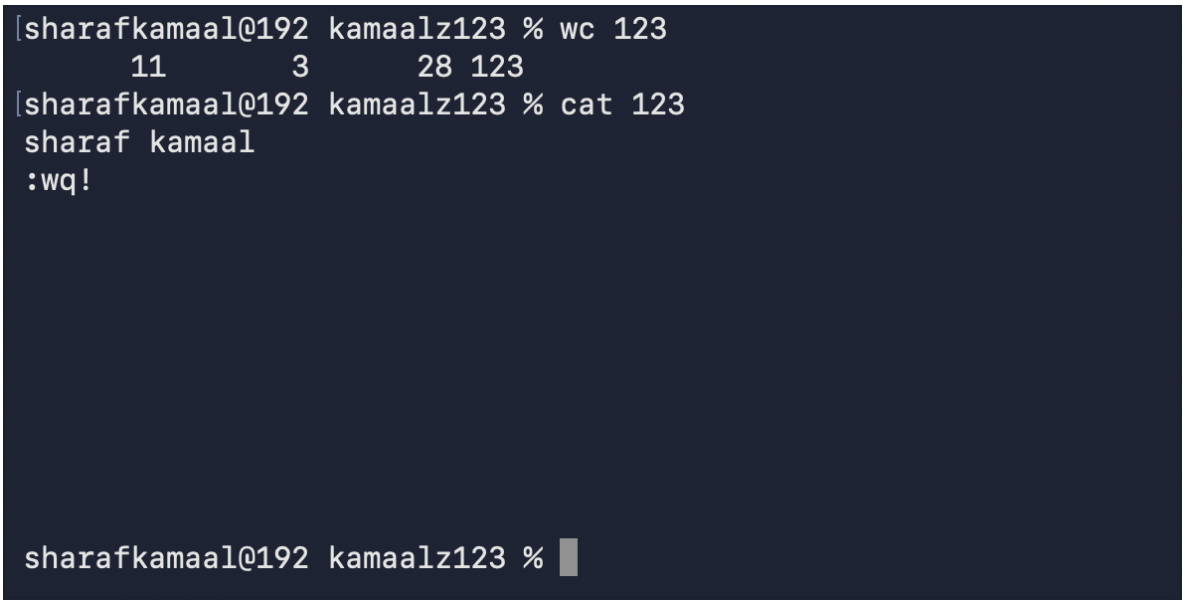


- wc: Counts and displays the number of lines, words, and bytes/ characters in a file or input stream.

- cat: Reads and outputs the entire content of one or more files directly to the terminal, or concatenates multiple files together.