CTI Aggregator User Guide

How data Flows

The path for every feed regardless of source

Adding a New Feed

Step 1: Open the Django Admin

Go to `http://localhost:8000/admin/` and log in.

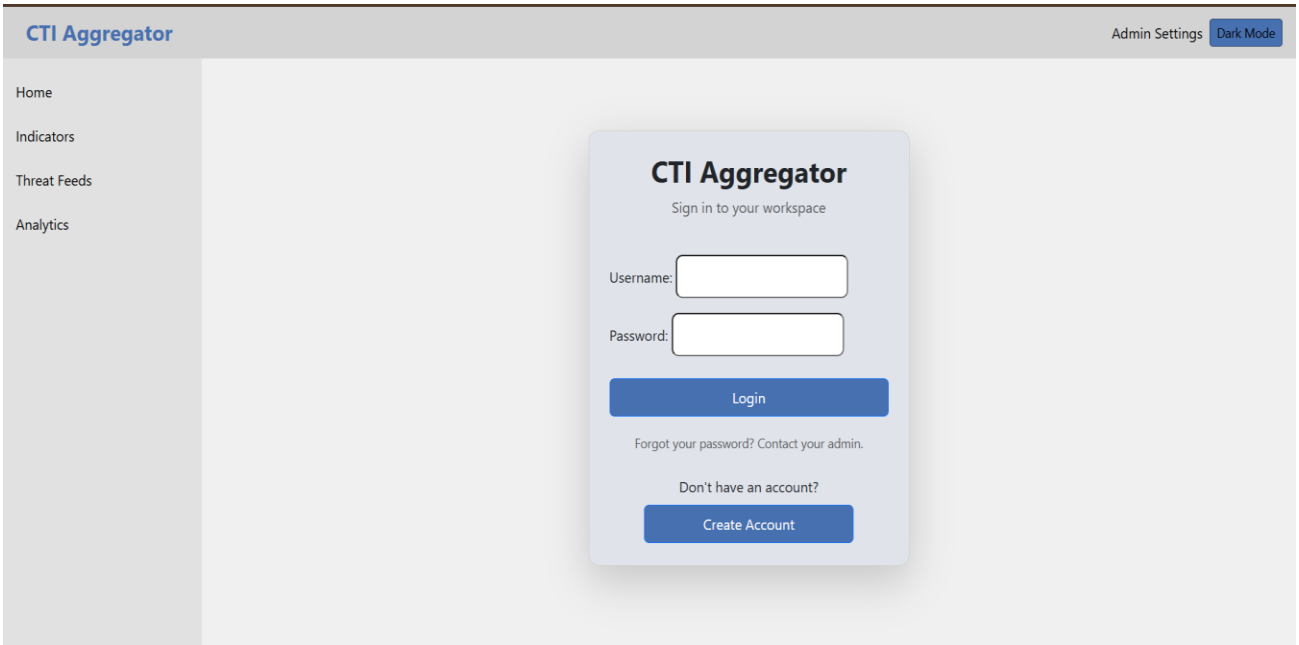

Step 2: Go to Feed Sources

Click **Feed Sources** under **Ingestion**, then click **Add Feed Source**.

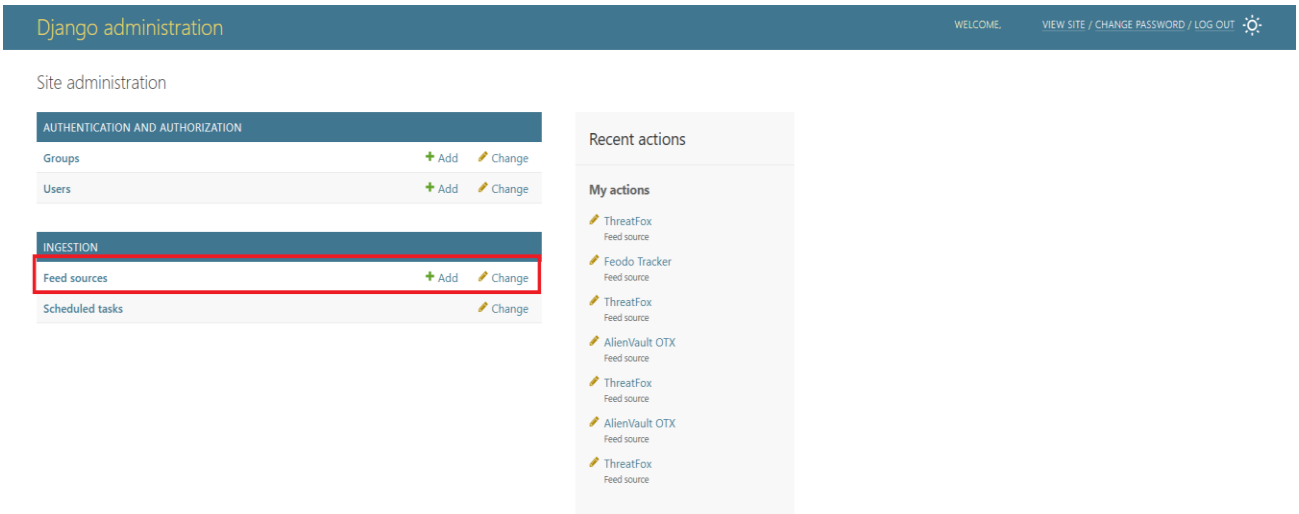

Step 3: Fill in the Basics

Name	A name for the source
Adapter type	Pick the format: JSON API, CSV/TSV File, Plain Text list, MISP Feed, or TAXII 2.1 Server.
Is enabled	Check this so it runs with ingest_all.
API key	Paste the API key here if the feed needs one. Leave blank for open feeds. The key gets saved to your .env file automatically when you hit save.

Step 4: Fill in the Feed-Specific Fields

Feed URL	The URL to pull data from.
Auth header name	The HTTP header that carries your API key. Leave blank for open feeds.

Text and CSV feeds:

IOC type	What kind of indicator each line/row is: ip, url, domain, hash, etc.

TAXII feeds:

Discovery URL	The TAXII 2.1 discovery endpoint.
Collection ID	UUID of the collection to pull from. Leave blank to auto-discover.
Username / Password	Login credentials for the TAXII server.

Step 5: Save

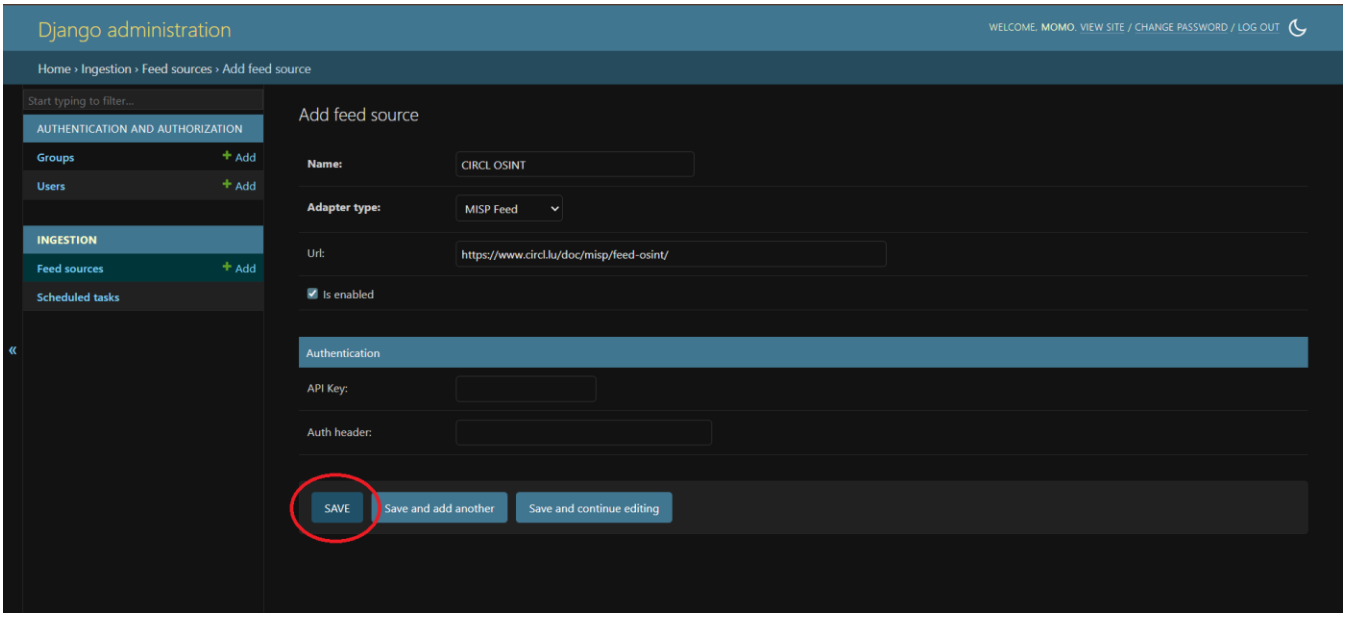

Hit **Save**. The feed is ready and will run with the next ingestion.

When it's time to pull a feed, the adapter pattern resolves the interface mismatch between the pipeline (the "client") and the external feed (the "adaptee"). The pipeline always expects the same indicator shape, but the feeds provide data in vastly different ways and formats. To solve this, each gets its own adapter class whose one job is to bridge that gap and allow for compatibility with the rest of the pipeline.

1. **Look up the FeedSource.** The row the admin saved carries the adapter class to use, the feed's URL, and the name of the environment variable that holds its API key.

2. **Authenticate.** If the feed needs a key, the adapter pulls it out of the .env file and attaches it to the outgoing request in whatever header shape that specific feed expects.

3. **Speak the feed's native language.** The adapter calls the URL and parses the raw response in its own format: CSV, STIX, JSON, etc.

4. **Translate to the shared Indicator interface.** The adapter hands a clean, uniform list of indicators to the normalization step, which dedupes and stores them without caring what source produced them.

Running Ingestion

Pull All Enabled Feeds

Two ways to kick off ingestion:

1. **From the browser** — on the **Threat Feeds** page click **Update All Feeds**. A notification shows per-source indicator counts.
2. **From menu.bat** — pick option **4) Ingest All Feeds**.

Scheduled Automatic Pulls

If you want the app to run ingestion on its own without you clicking Update, schedule it from the admin. Go to **Admin → Scheduled Tasks**. You'll see three cards, each for a different background job:

- **Feed Ingestion** — pulls all enabled feeds on a schedule.
- **Purge Stale Indicators** — removes indicators older than the selected window to keep data fresh.
- **News Fetching** — queries the database on existing CVE and runs them through Google’s RSS feed to give up to date news

Click into the card you want, then set:

- **Frequency** — every 6 hours, every 12 hours, daily, weekly, or monthly.
- **Time of day** — when the job should fire each time.
- **Is enabled** — checked.

Save it. The scheduler picks it up automatically. You may also run a single command from this panel as well.

Checking Logs

Ingestion activity is logged to `logs/ingestion.txt` These are located in the project root. You'll see:

- Which feeds were pulled and when
- How many raw indicators came back
- How many made it through normalization and dedup
- How many new records hit the database
- Any errors or skipped records
- Scheduled jobs firing when triggered

Dashboard

Indicators Page

Browse, search, and filter all stored indicators by type, source, confidence, or labels.

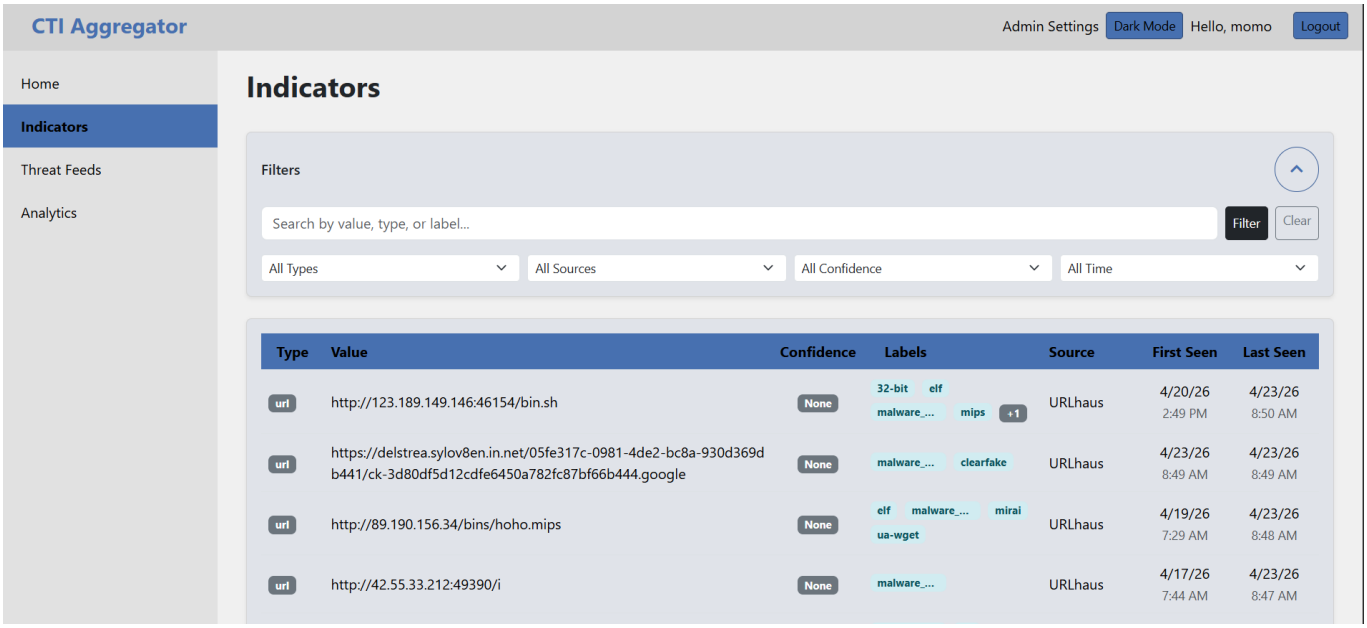

Analytics Page

See the big picture: total indicators, high-confidence count, top sources by volume.

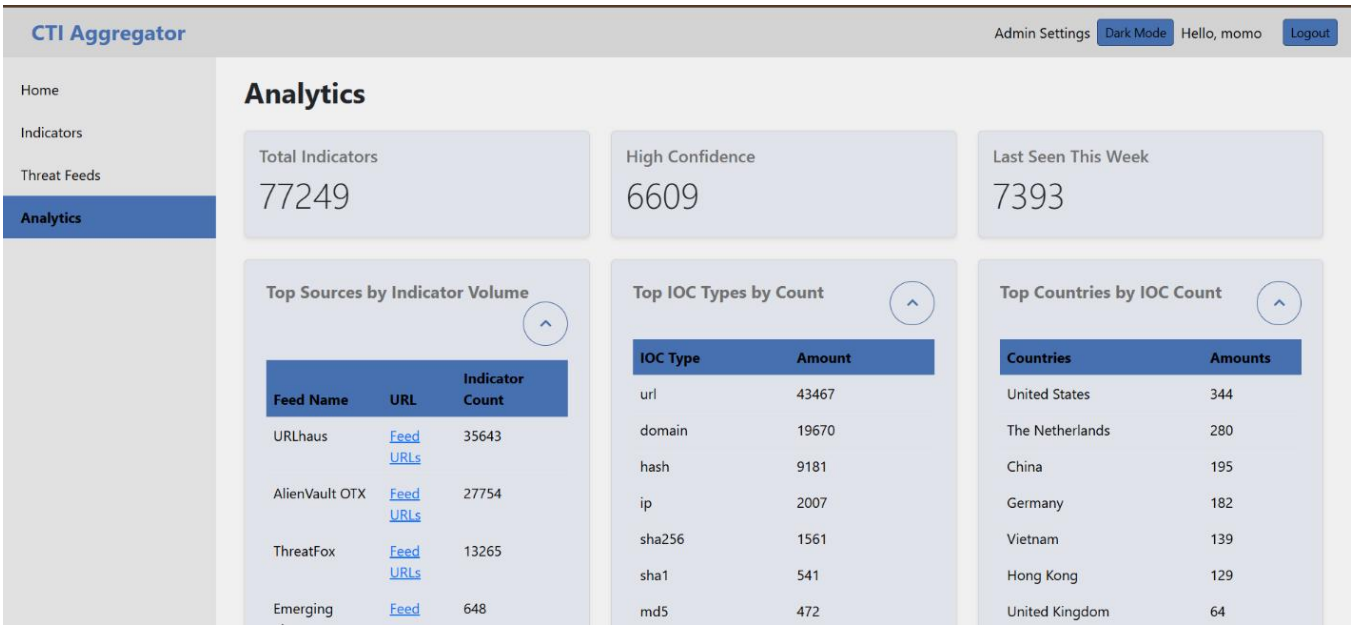

Threat Feeds Page

View all configured feeds, their status, and when they last ran. Hit **Update All Feeds** to trigger ingestion from the browser.

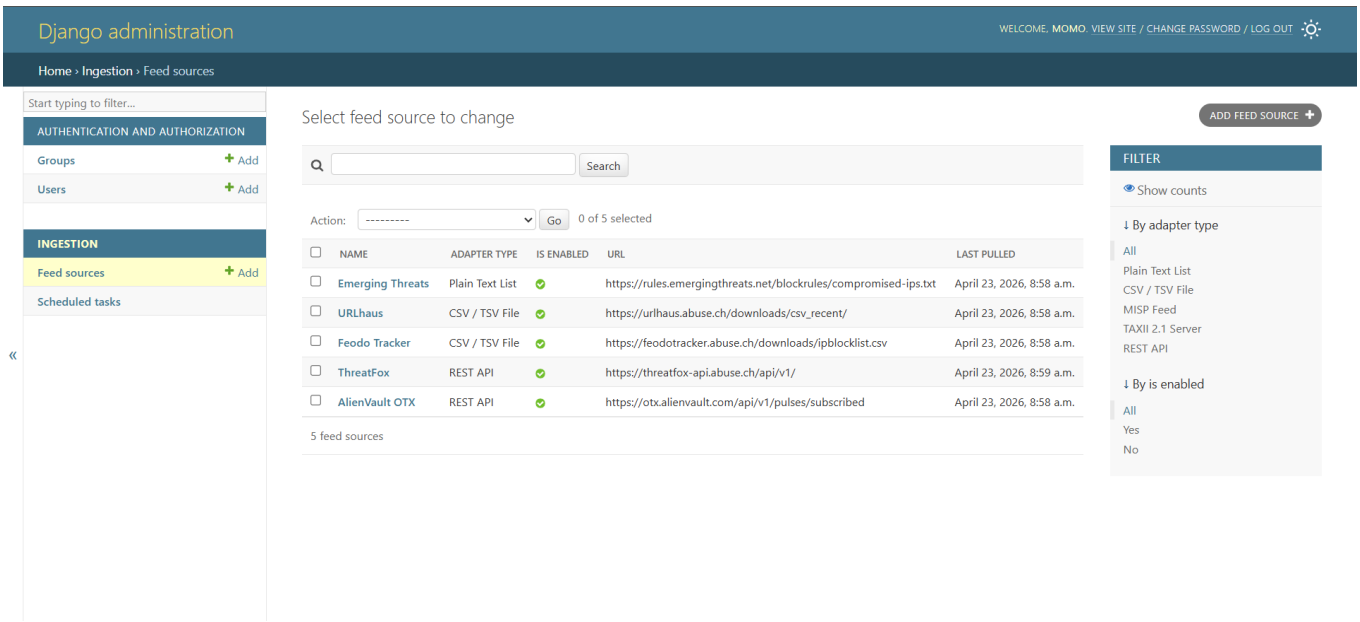

Scheduled Tasks Page

Change the schedule of tasks or run them separately from the admin page

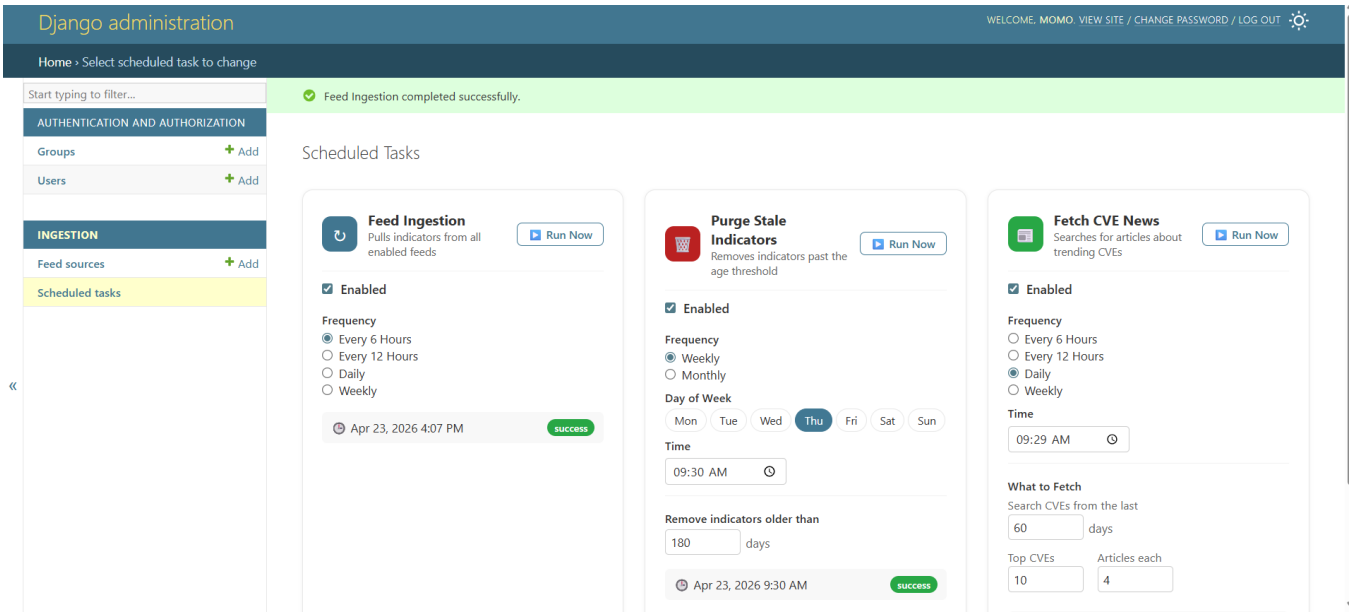

CTI aggregator was designed to be open for additions and closed for modifications. Adding feeds means filling out a config form instead of editing code and internal logic. Below are some sources that may be added into the aggregator simply by filling out the forms.

abuse.ch SSLBL Certs (CSV)

Name	abuse.ch SSLBL Certs
Adapter type	CSV / TSV File
API key	Your abuse.ch Auth-Key
Auth header name	Auth-Key
Is enabled	✓
Feed URL	https://sslbl.abuse.ch/blacklist/sslblacklist.csv
IOC type	sha1
Advanced config	{"skip_header": false, "ioc_value_column": 1, "label_columns": [2], "first_seen_column": 0}

abuse.ch SSLBL IPs (CSV)

Name	abuse.ch SSLBL IPs
Adapter type	CSV / TSV File
API key	Your abuse.ch Auth-Key

Auth header name	Auth-Key
Is enabled	✓
Feed URL	https://sslbl.abuse.ch/blacklist/sslipblacklist.csv
IOC type	ip
Advanced config	{"skip_header": false, "ioc_value_column": 0, "first_seen_column": 2}

AbuseIPDB (JSON API)

Name	AbuseIPDB
Adapter type	JSON API
API key	Your AbuseIPDB API key (from abuseipdb.com → Account → API)
Auth header name	Key
Is enabled	✓
Feed URL	https://api.abuseipdb.com/api/v2/blacklist
IOC type	ip
Advanced config	{"data_path": "data", "ioc_value_field": "ipAddress", "last_seen_field": "lastReportedAt", "confidence_field": "abuseConfidenceScore"}

Blocklist.de (plain text)

Name	Blocklist.de
Adapter type	Plain Text List
API key	
Is enabled	✓
Feed URL	https://lists.blocklist.de/lists/all.txt

Botvrij OSINT (MISP)

Name	Botvrij OSINT
Adapter type	MISP Feed
API key	
Is enabled	✓
Feed URL	https://www.botvrij.eu/data/feed-osint/ (note trailing slash)

CINS Army (plain text)

Name	CINS Army
Adapter type	Plain Text List

API key	
Is enabled	✓
Feed URL	https://cinsscore.com/list/ci-badguys.txt

CIRCL OSINT (MISP)

Name	CIRCL OSINT
Adapter type	MISP Feed
API key	
Is enabled	✓
Feed URL	https://www.circl.lu/doc/misp/feed-osint/

MalwareBazaar (CSV)

Name	MalwareBazaar
Adapter type	CSV / TSV File
API key	Your abuse.ch Auth-Key
Auth header name	Auth-Key
Is enabled	✓
Feed URL	https://bazaar.abuse.ch/export/csv/recent/
IOC type	sha256
Advanced config	{"skip_header": false, "ioc_value_column": 1, "label_columns": [8, 5], "first_seen_column": 0}

OpenPhish (plain text)

Name	OpenPhish
Adapter type	Plain Text List
API key	
Is enabled	✓
Feed URL	https://openphish.com/feed.txt

Spamhaus DROP (plain text)

Name	Spamhaus DROP
Adapter type	Plain Text List
API key	
Is enabled	✓
Feed URL	https://www.spamhaus.org/drop/drop.txt

Tor Exit Nodes (plain text)

Name	Tor Exit Nodes

Adapter type	Plain Text List
API key	
Is enabled	✓
Feed URL	https://check.torproject.org/torbulkexitlist