



Job Documentation

Generated by Talend Data Fabric

Project Name	Contoso_Integration	GENERATION DATE	Apr 30, 2016 4:19:04 PM
AUTHOR	user@talend.com	Talend Data Fabric VERSION	6.1.1.20151214_1327

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)




Project Description


Properties	Values
Name	Contoso_Integration
Language	java
Description	

Description

Properties	Values
Name	FactSalesQuota_Loading
Author	user@talend.com
Version	0.1
Purpose	
Status	
Description	
Creation	Apr 27, 2016 3:15:09 PM
Modification	Apr 28, 2016 2:50:07 PM

Preview Picture

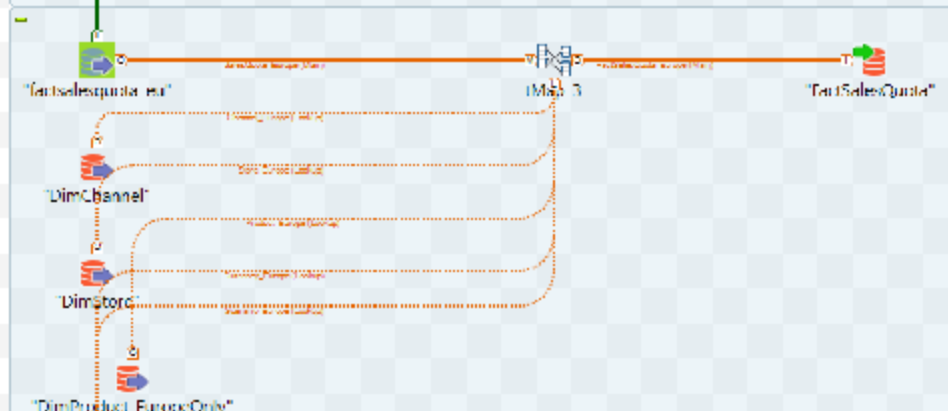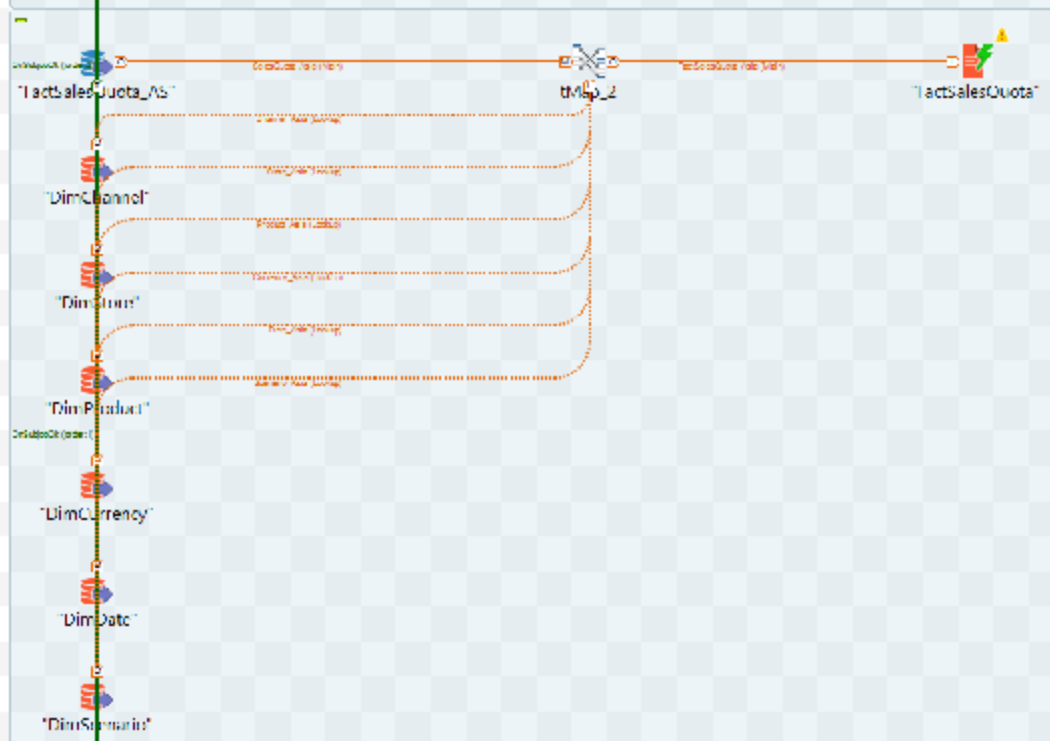

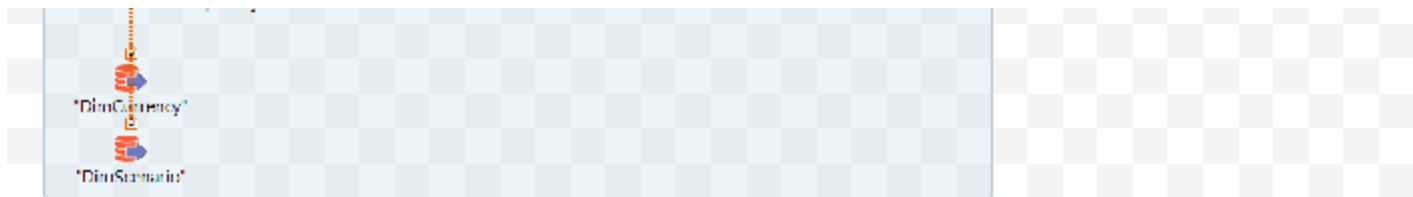

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	true
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false

Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Type	Value	Source
------	--------	--------------	------	-------	--------

Component List


Component Name	Component Type
CNTL_Job_Tracking_Stats_CHILD_1	CNTL_Job_Tracking_Stats_CHILD
tMSSqlInput_1	tMSSqlInput
tMSSqlInput_10	tMSSqlInput
tMSSqlInput_11	tMSSqlInput
tMSSqlInput_12	tMSSqlInput
tMSSqlInput_13	tMSSqlInput
tMSSqlInput_14	tMSSqlInput

tMSSqlInput_15	tMSSqlInput
tMSSqlInput_16	tMSSqlInput
tMSSqlInput_17	tMSSqlInput
tMSSqlInput_18	tMSSqlInput
tMSSqlInput_2	tMSSqlInput
tMSSqlInput_3	tMSSqlInput
tMSSqlInput_4	tMSSqlInput
tMSSqlInput_5	tMSSqlInput
tMSSqlInput_6	tMSSqlInput
tMSSqlInput_7	tMSSqlInput
tMSSqlInput_8	tMSSqlInput
tMSSqlInput_9	tMSSqlInput
tMSSqlOutputBulkExec_1	tMSSqlOutputBulkExec
tMSSqlOutputBulkExec_2	tMSSqlOutputBulkExec
tMSSqlOutput_1	tMSSqlOutput
tMap_1	tMap
tMap_2	tMap

tMap_3	tMap
tMysqlInput_1	tMysqlInput
tPostgresqlInput_1	tPostgresqlInput

Components Description

Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	tMysqlInput_1
	LABEL	__TABLE__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL


Port	"1433"
Schema	"dbo"
Database	"Contoso_Retail_SOR_NorthAmerica"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"FactSalesQuota_NA"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.FactSalesQuota_NA.SalesQuotaKey, dbo.FactSalesQuota_NA.ChannelKey, dbo.FactSalesQuot dbo.FactSalesQuota_NA.ProductLabel, dbo.FactSalesQuo dbo.FactSalesQuota_NA.CurrencyKey, dbo.FactSalesQuota_NA.ScenarioKey, dbo.FactSalesQuota_NA.SalesQuantityQuota, dbo.FactSalesQuota_NA.SalesAmountQuota, dbo.FactSalesQuota_NA.GrossMarginQuota, dbo.FactSalesQuota_NA.GrossMarginPctQuota, dbo.FactSalesQuota_NA.LoadDate, dbo.FactSalesQuota_ FROM dbo.FactSalesQuota_NA"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""

Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{TRIM=true, SCHEMA_COLUMN=SalesQuotaKey}, {TRIM=true, SCHEMA_COLUMN=ChannelKey}, {TRIM=true, SCHEMA_COLUMN=StoreKey}, {TRIM=true, SCHEMA_COLUMN=ProductLabel}, {TRIM=true, SCHEMA_COLUMN=DateKey}, {TRIM=true, SCHEMA_COLUMN=CurrencyKey}, {TRIM=true, SCHEMA_COLUMN=ScenarioKey}, {TRIM=true, SCHEMA_COLUMN=SalesQuantityQuota}, {TRIM=true, SCHEMA_COLUMN=SalesAmountQuota}, {TRIM=true, SCHEMA_COLUMN=GrossMarginQuota}, {TRIM=true, SCHEMA_COLUMN=GrossMarginPctQuota}, {TRIM=true, SCHEMA_COLUMN=LoadDate}, {TRIM=true, SCHEMA_COLUMN=UpdateDate}]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for FactSalesQuota_NA :

Column	Key	Type	Length	Precision	Nullable	Comment
SalesQuotaKey	false	int	10		false	
ChannelKey	false	int	10		false	
StoreKey	false	int	10		false	
ProductLabel	false	String	24		false	
DateKey	false	java.util.Date	10		false	
CurrencyKey	false	int	10		false	
ScenarioKey	false	int	10		false	
SalesQuantityQuota	false	Object	19	4	false	
SalesAmountQuota	false	Object	19	4	false	
GrossMarginQuota	false	Object	19	4	false	
GrossMarginPctQuota	false	BigDecimal	10	4	true	
LoadDate	false	java.util.Date	23	3	true	
UpdateDate	false	java.util.Date	23	3	true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_10	INPUT(S)	none

	LABEL	__TABLE__	OUTPUT(S)	tMap_2
--	-------	-----------	-----------	------------------------

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_10
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false


Schema	
Table Name	"DimProduct"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimProduct.ProductKey, dbo.DimProduct.Pi FROM dbo.DimProduct"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[{TRIM=true, SCHEMA_COLUMN=ProductKey}, {TRIM=tru SCHEMA_COLUMN=ProductLabel}]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimProduct :

Column	Key	Type	Length	Precision	Nullable	Comment
ProductKey	true	int	10		false	
ProductLabel	false	String	255		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_11	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_11
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false


Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimCurrency"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimCurrency.CurrencyKey FROM dbo.DimC
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=CurrencyKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimCurrency :

Column	Key	Type	Length	Precision	Nullable	Comment
CurrencyKey	true	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_12	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_12
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****


REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimDate"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimDate.DateSK, dbo.DimDate.DateAK FROM dbo.DimDate"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{TRIM=true, SCHEMA_COLUMN=DateSK}, {TRIM=true, SCHEMA_COLUMN=DateAK}]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimDate :

Column	Key	Type	Length	Precision	Nullable	Comment
DateSK	true	int	10		false	
DateAK	false	java.util.Date	10		false	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_13	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_13
Component Name	tMSSqlInput
Version	0.102 (ALPHA)

Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimScenario"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimScenario.ScenarioKey FROM dbo.DimS
!!!NOTE.NAME!!!	This option only applies when deploying and running in the


Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[(TRIM=true, SCHEMA_COLUMN=ScenarioKey)]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimScenario :

Column	Key	Type	Length	Precision	Nullable	Comment
ScenarioKey	true	int	10		false	

Original Function Parameters:

Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_14	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_14
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"


Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimChannel"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimChannel.ChannelKey FROM dbo.DimCr
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=ChannelKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimChannel :

Column	Key	Type	Length	Precision	Nullable	Comment
ChannelKey	true	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_15	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_15
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false


Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimStore"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimStore.StoreKey FROM dbo.DimStore"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=StoreKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimStore :

Column	Key	Type	Length	Precision	Nullable	Comment
StoreKey	true	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_16	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_16
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****


REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimProduct_EuropeOnly"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimProduct_EuropeOnly.ProductKey, dbo.DimProduct_EuropeOnly.Brand_ID FROM dbo.DimProduct_EuropeOnly"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[{TRIM=true, SCHEMA_COLUMN=ProductKey}, {TRIM=true, SCHEMA_COLUMN=Brand_ID}]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimProduct_EuropeOnly :

Column	Key	Type	Length	Precision	Nullable	Comment
ProductKey	true	int	10		false	
Brand_ID	false	String	24		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_17	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_17
Component Name	tMSSqlInput
Version	0.102 (ALPHA)

Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimCurrency"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimCurrency.CurrencyKey FROM dbo.DimC
!!!NOTE.NAME!!!	This option only applies when deploying and running in the


Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=CurrencyKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimCurrency :

Column	Key	Type	Length	Precision	Nullable	Comment
CurrencyKey	true	int	10		false	

Original Function Parameters:

Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_18	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_18
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"


Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimScenario"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimScenario.ScenarioKey FROM dbo.DimS
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=ScenarioKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimScenario :

Column	Key	Type	Length	Precision	Nullable	Comment
ScenarioKey	true	int	10		false	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false


Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimChannel"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimChannel.ChannelKey FROM dbo.DimCh
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=ChannelKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimChannel :

Column	Key	Type	Length	Precision	Nullable	Comment
ChannelKey	true	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_3	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_Retail_SOR_NorthAmerica"
Username	"admin1"
Password	*****


REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimStore"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimStore.StoreKey FROM dbo.DimStore"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[(TRIM=true, SCHEMA_COLUMN=StoreKey)]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimStore :

Column	Key	Type	Length	Precision	Nullable	Comment
StoreKey	true	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_4	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false

Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	


Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimProduct"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimProduct.ProductKey, dbo.DimProduct.Pi FROM dbo.DimProduct"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""

Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=ProductKey], {TRIM=tru SCHEMA_COLUMN=ProductLabel}]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimProduct :

Column	Key	Type	Length	Precision	Nullable	Comment
ProductKey	true	int	10		false	
ProductLabel	false	String	255		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_5	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_5
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****


REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimDate"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimDate.DateSK, dbo.DimDate.DateAK FROM dbo.DimDate"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{TRIM=true, SCHEMA_COLUMN=DateSK}, {TRIM=true, SCHEMA_COLUMN=DateAK}]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimDate :

Column	Key	Type	Length	Precision	Nullable	Comment
DateSK	true	int	10		false	
DateAK	false	java.util.Date	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_6	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_6
Component Name	tMSSqlInput
Version	0.102 (ALPHA)

Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimCurrency"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimCurrency.CurrencyKey FROM dbo.DimC
!!!NOTE.NAME!!!	This option only applies when deploying and running in the


Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=CurrencyKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimCurrency :

Column	Key	Type	Length	Precision	Nullable	Comment
CurrencyKey	true	int	10		false	

Original Function Parameters:

Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_7	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_7
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"


Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimScenario"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimScenario.ScenarioKey FROM dbo.DimS
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[TRIM=true, SCHEMA_COLUMN=ScenarioKey]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimScenario :

Column	Key	Type	Length	Precision	Nullable	Comment
ScenarioKey	true	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_8	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_8
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false


Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimChannel"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimChannel.ChannelKey FROM dbo.DimCh
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{TRIM=true, SCHEMA_COLUMN=ChannelKey}]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimChannel :

Column	Key	Type	Length	Precision	Nullable	Comment
ChannelKey	true	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_9	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tMSSqlInput_9
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	
Host	"localhost"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Username	"admin1"
Password	*****

REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"DimStore"
Query Type	""
Guess Schema	""
Query	"SELECT dbo.DimStore.StoreKey FROM dbo.DimStore"
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[(TRIM=true, SCHEMA_COLUMN=StoreKey)]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimStore :

Column	Key	Type	Length	Precision	Nullable	Comment
StoreKey	true	int	10		false	

Original Function Parameters:

Component **tMSSqlOutputBulkExec**

	UNIQUE NAME	tMSSqlOutputBulkExec_1	INPUT(S)	tMap_1 , tMSSqlInput_2, tMSSqlInput_3, tMSSqlInput_4, tMSSqlInput_5, tMSSqlInput_6, tMSSqlInput_7
	LABEL	__TABLE__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tMSSqlOutputBulkExec_1
Component Name	tMSSqlOutputBulkExec
Version	0.102 (ALPHA)

Family	Databases/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutputBulkExec
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Action	INSERT

Property Type	
Use an existing connection	false
Component List	
Host	"localhost"
!!!TYPE.NAME!!!	MSSQL
Port	"1433"
Schema	"dbo"
DB Name	"Contoso_DW"
Username	"admin1"
Password	*****
Table	"FactSalesQuota"
Action on table	NONE
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
File Name	"C:/Talend/Talend-Tools-Studio-20151214_1327-V6.1.1/wr
Append	false
Mapping	id_MSSQL


Additional JDBC Parameters	""
Field Separator	"," ,
Row Separator	"\n"
First Row	"1"
Include Header	false
Code page	"OEM"
Data File Type	char
Encoding	"ISO-8859-15"
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for FactSalesQuota :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

SalesQuotaKey	true	int	10		false	
ChannelKey	false	int	10		false	
StoreKey	false	int	10		false	
ProductKey	false	int	10		false	
DateKey	false	java.util.Date	23	3	false	
DateSK	false	int	10		false	
CurrencyKey	false	int	10		false	
ScenarioKey	false	int	10		false	
SalesQuantityQuota	false	Object	19	4	false	
SalesAmountQuota	false	Object	19	4	false	
GrossMarginQuota	false	Object	19	4	false	
SOR_LoadDate	false	java.util.Date	23	3	true	
SOR_UpdateDate	false	java.util.Date	23	3	true	
SOR_ID	false	Integer	10		true	
DI_Job_ID	false	String	20		true	
DI_CreateDate	false	java.util.Date	23	3	false	
DI_Modified_Date	false	java.util.Date	23	3	false	

Original Function Parameters:
Component tMSSqlOutputBulkExec

	UNIQUE NAME	tMSSqlOutputBulkExec_2	INPUT(S)	tMap_2 , tMSSqlInput_8, tMSSqlInput_9, tMSSqlInput_10, tMSSqlInput_11, tMSSqlInput_12, tMSSqlInput_13
	LABEL	__TABLE__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tMSSqlOutputBulkExec_2
Component Name	tMSSqlOutputBulkExec
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlOutputBulkExec
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Action	INSERT
Property Type	
Use an existing connection	false
Component List	
Host	"localhost"
!!!TYPE.NAME!!!	MSSQL
Port	"1433"
Schema	"dbo"

DB Name	"Contoso_DW"
Username	"admin1"
Password	*****
Table	"FactSalesQuota"
Action on table	NONE
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
File Name	"C:/Talend/Talend-Tools-Studio-20151214_1327-V6.1.1/wr
Append	false
Mapping	id_MSSQL
Additional JDBC Parameters	""
Field Separator	","
Row Separator	"\n"
First Row	"1"
Include Header	false
Code page	"OEM"
Data File Type	char


Encoding	"ISO-8859-15"
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for FactSalesQuota :

Column	Key	Type	Length	Precision	Nullable	Comment
SalesQuotaKey	true	int	10		false	
ChannelKey	false	int	10		false	
StoreKey	false	int	10		false	
ProductKey	false	int	10		false	
DateKey	false	java.util.Date	23	3	false	
DateSK	false	int	10		false	
CurrencyKey	false	int	10		false	

ScenarioKey	false	int	10		false	
SalesQuantityQuota	false	Object	19	4	false	
SalesAmountQuota	false	Object	19	4	false	
GrossMarginQuota	false	Object	19	4	false	
SOR_LoadDate	false	java.util.Date	23	3	true	
SOR_UpdateDate	false	java.util.Date	23	3	true	
SOR_ID	false	Integer	10		true	
DI_Job_ID	false	String	20		true	
DI_CreateDate	false	java.util.Date	23	3	false	
DI_Modified_Date	false	java.util.Date	23	3	false	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_3 tMSSqlInput_14, tMSSqlInput_15 tMSSqlInput_16, tMSSqlInput_17 tMSSqlInput_18
	LABEL	__TABLE__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tMSSqlOutput_1

Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Property Type	
Use an existing connection	false
Component List	
Host	"localhost"
Port	"1433"
Schema	"dbo"
Database	"Contoso_DW"
Database Driver	MSSQL
Username	"admin1"
Password	*****
Table	"FactSalesQuota"
Action on table	TRUNCATE
Turn on Identity insert	false
Action on data	INSERT
!!!NOTE.NAME!!!	NOTE: batch size must be less than or equal to total numb markers divided by number of columns
Specify identity field	false

Identity field	SalesQuotaKey
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Reject Schema	null:errorCode errorMessage
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options	<pre> [{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE INSERTABLE=true, SCHEMA_COLUMN=SalesQuotaKey} {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE: INSERTABLE=true, SCHEMA_COLUMN=ChannelKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE: INSERTABLE=true, SCHEMA_COLUMN=StoreKey}, {UPC DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=ProductKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=DateKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=DateSK}, {UPDATE_KEY=false, DEL UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=CurrencyKey}, {UPDATE_KEY=false DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=ScenarioKey}, {UPDATE_KEY=false DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=SalesQuantityQuota}, {UPDATE_KEY DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=SalesAmountQuota}, {UPDATE_KEY\ DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=GrossMarginQuota}, {UPDATE_KEY DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=SOR_LoadDate}, {UPDATE_KEY=fa DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=SOR_UpdateDate}, {UPDATE_KEY= DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=SOR_ID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr SCHEMA_COLUMN=DI_Job_ID}] </pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	__TABLE__


Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for FactSalesQuota :

Column	Key	Type	Length	Precision	Nullable	Comment
SalesQuotaKey	true	int	10		false	
ChannelKey	false	int	10		false	
StoreKey	false	int	10		false	
ProductKey	false	int	10		false	
DateKey	false	java.util.Date	23	3	false	
DateSK	false	int	10		false	
CurrencyKey	false	int	10		false	
ScenarioKey	false	int	10		false	
SalesQuantityQuota	false	Object	19	4	false	

SalesAmountQuota	false	Object	19	4	false	
GrossMarginQuota	false	Object	19	4	false	
SOR_LoadDate	false	java.util.Date	23	3	true	
SOR_UpdateDate	false	java.util.Date	23	3	true	
SOR_ID	false	Integer	10		true	
DI_Job_ID	false	String	20		true	

Original Function Parameters:
Component tMysqlInput

	UNIQUE NAME	tMysqlInput_1	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_3 , tPostgresqlInput_1, tMSSqlInput_1

Component Parameters:

Properties	Values
Unique Name	tMysqlInput_1
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	
DB Version	MYSQL_5

Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"
Database	"contoso_retail_sor_europe"
Database Driver	MYSQL
Username	"root"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"factsalesquota_eu"
Query Type	""
Guess Schema	""
Query	"SELECT `factsalesquota_eu`.`SalesQuotaKey`, `factsalesquota_eu`.`ChannelKey`, `factsalesquota_eu`.`Si `factsalesquota_eu`.`Brand_ID`, `factsalesquota_eu`.`Date `factsalesquota_eu`.`CurrencyKey`, `factsalesquota_eu`.`S `factsalesquota_eu`.`SalesQuantityQuota`, `factsalesquota_eu`.`SalesAmountQuota`, `factsalesquota_eu`.`GrossMarginQuota`, `factsalesquota_eu`.`GrossMarginPctQuota`, `factsalesquota_eu`.`LoadDate`, `factsalesquota_eu`.`Upd: `factsalesquota_eu`"

!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false
Trim column	[[{TRIM=true, SCHEMA_COLUMN=SalesQuotaKey}, {TRIM=true, SCHEMA_COLUMN=ChannelKey}, {TRIM=true, SCHEMA_COLUMN=StoreKey}, {TRIM=true, SCHEMA_COLUMN=Brand_ID}, {TRIM=true, SCHEMA_COLUMN=DateKey}, {TRIM=true, SCHEMA_COLUMN=CurrencyKey}, {TRIM=true, SCHEMA_COLUMN=ScenarioKey}, {TRIM=true, SCHEMA_COLUMN=SalesQuantityQuota}, {TRIM=true, SCHEMA_COLUMN=SalesAmountQuota}, {TRIM=true, SCHEMA_COLUMN=GrossMarginQuota}, {TRIM=true, SCHEMA_COLUMN=GrossMarginPctQuota}, {TRIM=true, SCHEMA_COLUMN=LoadDate}, {TRIM=true, SCHEMA_COLUMN=UpdateDate}]]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for factsalesquota_eu :

Column	Key	Type	Length	Precision	Nullable	Comment
SalesQuotaKey	false	int	10		false	
ChannelKey	false	int	10		false	
StoreKey	false	int	10		false	
Brand_ID	false	String	24		false	
DateKey	false	java.util.Date	10		false	
CurrencyKey	false	int	10		false	
ScenarioKey	false	int	10		false	
SalesQuantityQuota	false	Object	19		false	
SalesAmountQuota	false	Object	19		false	
GrossMarginQuota	false	Object	19		false	
GrossMarginPctQuota	false	Float	10	4	true	
LoadDate	false	java.util.Date	19		true	

UpdateDate	false	java.util.Date	19		true	
------------	-------	----------------	----	--	------	--

Original Function Parameters:
Component tPostgresqlInput

	UNIQUE NAME	tPostgresqlInput_1	INPUT(S)	tMysqlInput_1
	LABEL	__TABLE__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tPostgresqlInput_1
Component Name	tPostgresqlInput
Version	0.102 (ALPHA)
Family	Databases/PostgreSQL
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tPostgresqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\Talend-Tools-Studio-20151214_1327-V6.1.1\cor
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	
Use an existing connection	false
Component List	
DB Version	V9_X
Host	"localhost"
Database Driver	POSTGRESQL
Port	"5432"
Database	"contoso_retail_sor_asia"

Schema	"public"
Username	"postgres"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	false
Schema	
Table Name	"FactSalesQuota_AS"
Query Type	""
Guess Schema	""
Query	"SELECT \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS \"contoso_retail_sor_asia\".\"public\".\"FactSalesQuota_AS
!!!NOTE.NAME!!!	This option only applies when deploying and running in the
Specify a data source alias	false
Data source alias	""


Mapping	postgres_id
Encoding	"ISO-8859-15"
Use cursor	false
Cursor size	1000
Trim all the String/Char columns	false
Trim column	{TRIM=true, SCHEMA_COLUMN=SalesQuotaKey}, {TRIM=true, SCHEMA_COLUMN=ChannelKey}, {TRIM=true, SCHEMA_COLUMN=Product_ID}, {TRIM=true, SCHEMA_COLUMN=DateKey}, {TRIM=true, SCHEMA_COLUMN=ScenarioKey}, {TRIM=true, SCHEMA_COLUMN=SalesQuantityQuota}, {TRIM=true, SCHEMA_COLUMN=SalesAmountQuota}, {TRIM=true, SCHEMA_COLUMN=GrossMarginQuota}, {TRIM=true, SCHEMA_COLUMN=GrossMarginPctQuota}, {TRIM=true, SCHEMA_COLUMN=LoadDate}, {TRIM=true, SCHEMA_COLUMN=
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for FactSalesQuota_AS :

Column	Key	Type	Length	Precision	Nullable	Comment
SalesQuotaKey	false	int	10		false	
ChannelKey	false	int	10		false	
StoreKey	false	int	10		false	
Product_ID	false	String	24		false	
DateKey	false	java.util.Date	29	6	false	
CurrencyKey	false	int	10		false	
ScenarioKey	false	int	10		false	
SalesQuantityQuota	false	double	17	17	false	
SalesAmountQuota	false	double	17	17	false	
GrossMarginQuota	false	double	17	17	false	
GrossMarginPctQuota	false	Double	17	17	true	
LoadDate	false	java.util.Date	29	6	true	
UpdateDate	false	java.util.Date	29	6	true	

Original Function Parameters:

Component CNTL_Job_Tracking_Stats_CHILD


	UNIQUE NAME	CNTL_Job_Tracking_Stats_CHILD_1	INPUT(S)	none

	LABEL	CNTL_Job_Tracking_Stats_CHILD	OUTPUT(S)	none
--	-------	-------------------------------	-----------	------

Component Parameters:

Properties	Values
Version	Latest
Show Information	false
Comment	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMap_1 , tMSSqlInput_2, tMSSqlInput_3, tMSSqlInput_4 , tMSSqlInput_5, tMSSqlInput_6, tMSSqlInput_7
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutputBulkExec_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	"C:/Talend/Talend-Tools-Studio-20151214_1327-V6.1.1/temp"

Max buffer size (nb of rows):	20000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(SalesQuota_NA):

Properties	Values
Name	SalesQuota_NA
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(SalesQuota_NA):

Name	Type	Expression	isNullable
SalesQuotaKey	int		false
ChannelKey	int		false
StoreKey	int		false
ProductLabel	String		false
DateKey	java.util.Date		false
CurrencyKey	int		false
ScenarioKey	int		false
SalesQuantityQuota	Object		false
SalesAmountQuota	Object		false
GrossMarginQuota	Object		false
GrossMarginPctQuota	BigDecimal		true
LoadDate	java.util.Date		true
UpdateDate	java.util.Date		true

Constraint Table Entries(SalesQuota_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Channel_NA):

Properties	Values
Name	Channel_NA
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Channel_NA):

Name	Type	Expression	isNullable
ChannelKey	int	SalesQuota_NA.ChannelKey	false

Constraint Table Entries(Channel_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Store_NA):

Properties	Values
Name	Store_NA
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Store_NA):

Name	Type	Expression	isNullable
StoreKey	int	SalesQuota_NA.StoreKey	false

Constraint Table Entries(Store_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Product_NA):

Properties	Values
Name	Product_NA
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Product_NA):

Name	Type	Expression	isNullable
ProductKey	int		false
ProductLabel	String	SalesQuota_NA.ProductLabel	true

Constraint Table Entries(Product_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Date_NA):

Properties	Values
Name	Date_NA
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Date_NA):

Name	Type	Expression	isNullable
DateSK	int		false
DateAK	java.util.Date	SalesQuota_NA.DateKey	false

Constraint Table Entries(Date_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Currency_NA):

Properties	Values
Name	Currency_NA
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Currency_NA):

Name	Type	Expression	isNullable
CurrencyKey	int	SalesQuota_NA.CurrencyKey	false

Constraint Table Entries(Currency_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Scenario_NA):

Properties	Values
Name	Scenario_NA
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Scenario_NA):

Name	Type	Expression	isNullable
ScenarioKey	int	SalesQuota_NA.ScenarioKey	false

Constraint Table Entries(Scenario_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):**Mapper table Properties(FactSalesQuota_NA):**

Properties	Values
Name	FactSalesQuota_NA
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(FactSalesQuota_NA):

Name	Type	Expression	isNullable
SalesQuotaKey	int	SalesQuota_NA.SalesQuotaKey	false
ChannelKey	int	SalesQuota_NA.ChannelKey	false
StoreKey	int	SalesQuota_NA.StoreKey	false
ProductKey	int	Product_NA.ProductKey	false
DateKey	java.util.Date	SalesQuota_NA.DateKey	false
DateSK	int	Date_NA.DateSK	false
CurrencyKey	int	SalesQuota_NA.CurrencyKey	false

ScenarioKey	int	SalesQuota_NA.ScenarioKey	false
SalesQuantityQuota	Object	SalesQuota_NA.SalesQuantityQuota	false
SalesAmountQuota	Object	SalesQuota_NA.SalesAmountQuota	false
GrossMarginQuota	Object	SalesQuota_NA.GrossMarginQuota	false
SOR_LoadDate	java.util.Date	SalesQuota_NA.LoadDate	true
SOR_UpdateDate	java.util.Date	SalesQuota_NA.UpdateDate	true
SOR_ID	Integer	4481	true
DI_Job_ID	String	context.getProperty("vJobPID")	true
DI_CreateDate	java.util.Date		false
DI_Modified_Date	java.util.Date		false

Constraint Table Entries(FactSalesQuota_NA):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMap_2 , tMSSqlInput_8, tMSSqlInput_9, tMSSqlInput_10, tMSSqlInput_11, tMSSqlInput_12, tMSSqlInput_13
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutputBulkExec_2

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	"C:/Talend/Talend-Tools-Studio-20151214_1327-V6.1.1/temp"
Max buffer size (nb of rows):	20000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):**Mapper table Properties(SalesQuota_Asia):**

Properties	Values
Name	SalesQuota_Asia
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(SalesQuota_Asia):

Name	Type	Expression	isNullable
SalesQuotaKey	int		false
ChannelKey	int		false
StoreKey	int		false
Product_ID	String		false
DateKey	java.util.Date		false
CurrencyKey	int		false
ScenarioKey	int		false
SalesQuantityQuota	double		false
SalesAmountQuota	double		false
GrossMarginQuota	double		false
GrossMarginPctQuota	Double		true
LoadDate	java.util.Date		true
UpdateDate	java.util.Date		true

Constraint Table Entries(SalesQuota_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Channel_Asia):

Properties	Values
Name	Channel_Asia
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Channel_Asia):

Name	Type	Expression	isNullable
ChannelKey	int	SalesQuota_Asia.ChannelKey	false

Constraint Table Entries(Channel_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Store_Asia):

Properties	Values
Name	Store_Asia
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Store_Asia):

Name	Type	Expression	isNullable
StoreKey	int	SalesQuota_Asia.StoreKey	false

Constraint Table Entries(Store_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Product_Asia):

Properties	Values
Name	Product_Asia
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Product_Asia):

Name	Type	Expression	isNullable
ProductKey	int		false
ProductLabel	String	SalesQuota_Asia.Product_ID.substring(6)	true

Constraint Table Entries(Product_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Currency_Asia):

Properties	Values
Name	Currency_Asia
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Currency_Asia):

Name	Type	Expression	isNullable
CurrencyKey	int	SalesQuota_Asia.CurrencyKey	false

Constraint Table Entries(Currency_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Date_Asia):

Properties	Values
Name	Date_Asia
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Date_Asia):

Name	Type	Expression	isNullable
DateSK	int		false
DateAK	java.util.Date	SalesQuota_Asia.DateKey	false

Constraint Table Entries(Date_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Scenario_Asia):

Properties	Values
Name	Scenario_Asia
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Scenario_Asia):

Name	Type	Expression	isNullable
ScenarioKey	int	SalesQuota_Asia.ScenarioKey	false

Constraint Table Entries(Scenario_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):**Mapper table Properties(FactSalesQuota_Asia):**

Properties	Values
Name	FactSalesQuota_Asia
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(FactSalesQuota_Asia):

Name	Type	Expression	isNullable
SalesQuotaKey	int	SalesQuota_Asia.SalesQuotaKey	false
ChannelKey	int	Channel_Asia.ChannelKey	false
StoreKey	int	Store_Asia.StoreKey	false
ProductKey	int	Product_Asia.ProductKey	false
DateKey	java.util.Date	Date_Asia.DateAK	false
DateSK	int	Date_Asia.DateSK	false
CurrencyKey	int	Currency_Asia.CurrencyKey	false

ScenarioKey	int	Scenario_Asia.ScenarioKey	false
SalesQuantityQuota	Object	SalesQuota_Asia.SalesQuantityQuota	false
SalesAmountQuota	Object	SalesQuota_Asia.SalesAmountQuota	false
GrossMarginQuota	Object	SalesQuota_Asia.GrossMarginQuota	false
SOR_LoadDate	java.util.Date	SalesQuota_Asia.LoadDate	true
SOR_UpdateDate	java.util.Date	SalesQuota_Asia.UpdateDate	true
SOR_ID	Integer	2281	true
DI_Job_ID	String		true
DI_CreateDate	java.util.Date		false
DI_Modified_Date	java.util.Date		false

Constraint Table Entries(FactSalesQuota_Asia):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tMap_3 , tMSSqlInput_14, tMSSqlInput_15, tMSSqlInput_16, tMSSqlInput_17, tMSSqlInput_18
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutput_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	"C:/Talend/Talend-Tools-Studio-20151214_1327-V6.1.1/temp"
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):

Mapper table Properties(SalesQuota_Europe):

Properties	Values
Name	SalesQuota_Europe
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(SalesQuota_Europe):

Name	Type	Expression	isNullable
SalesQuotaKey	int		false
ChannelKey	int		false
StoreKey	int		false
Brand_ID	String		false
DateKey	java.util.Date		false
CurrencyKey	int		false
ScenarioKey	int		false
SalesQuantityQuota	Object		false
SalesAmountQuota	Object		false
GrossMarginQuota	Object		false
GrossMarginPctQuota	Float		true
LoadDate	java.util.Date		true
UpdateDate	java.util.Date		true

Constraint Table Entries(SalesQuota_Europe):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Channel_Europe):

Properties	Values
Name	Channel_Europe
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Channel_Europe):

Name	Type	Expression	isNullable
ChannelKey	int	SalesQuota_Europe.ChannelKey	false

Constraint Table Entries(Channel_Europe):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Store_Europe):

Properties	Values
Name	Store_Europe
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Store_Europe):

Name	Type	Expression	isNullable
StoreKey	int	SalesQuota_Europe.StoreKey	false

Constraint Table Entries(Store_Europe):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Product_Europe):

Properties	Values
Name	Product_Europe
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Product_Europe):

Name	Type	Expression	isNullable
ProductKey	int		false
Brand_ID	String	SalesQuota_Europe.Brand_ID	true

Constraint Table Entries(Product_Europe):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Currency_Europe):

Properties	Values
Name	Currency_Europe
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Currency_Europe):

Name	Type	Expression	isNullable
CurrencyKey	int	SalesQuota_Europe.CurrencyKey	false

Constraint Table Entries(Currency_Europe):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Scenario_Europe):

Properties	Values
Name	Scenario_Europe
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(Scenario_Europe):

Name	Type	Expression	isNullable
ScenarioKey	int	SalesQuota_Europe.ScenarioKey	false

Constraint Table Entries(Scenario_Europe):

Name	Type	Expression	isNullable

Mapper table for tMap_3 (output):
Mapper table Properties(FactSalesQuota_Europe):

Properties	Values
Name	FactSalesQuota_Europe
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(FactSalesQuota_Europe):

Name	Type	Expression
SalesQuotaKey	int	SalesQuota_Europe.SalesQuotaKey
ChannelKey	int	SalesQuota_Europe.ChannelKey
StoreKey	int	SalesQuota_Europe.StoreKey
ProductKey	int	Product_Europe.ProductKey
DateKey	java.util.Date	SalesQuota_Europe.DateKey
DateSK	int	Integer.parseInt(TalendDate.formatDate("yyyyMMdd",SalesQuota_
CurrencyKey	int	SalesQuota_Europe.CurrencyKey
ScenarioKey	int	SalesQuota_Europe.ScenarioKey
SalesQuantityQuota	Object	SalesQuota_Europe.SalesQuantityQuota
SalesAmountQuota	Object	SalesQuota_Europe.SalesAmountQuota
GrossMarginQuota	Object	SalesQuota_Europe.GrossMarginQuota
SOR_LoadDate	java.util.Date	SalesQuota_Europe.LoadDate
SOR_UpdateDate	java.util.Date	SalesQuota_Europe.UpdateDate
SOR_ID	Integer	
DI_Job_ID	String	

Constraint Table Entries(FactSalesQuota_Europe):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------