Date

Subplot in Matplotlib

1. What is Subplot?

→ A subplot is used to display multiple charts in a single figure.

It helps us compare different graphs side by side or one above another.

Example :- Displaying a line charts and a bar chart in one figure.

2. Syntax

plt.subplot (rows, columns, position)

plt.subplot (1, 2, 1)

Parameter	Meaning.
rows	Number of rows
columns	Number of columns
position	Position of the chart.

Explanation

1 : One row

2 : Two columns


1 : First chart position

2 : Second chart position.

Date


4. Subplot Layout

1 Row x 2 columns

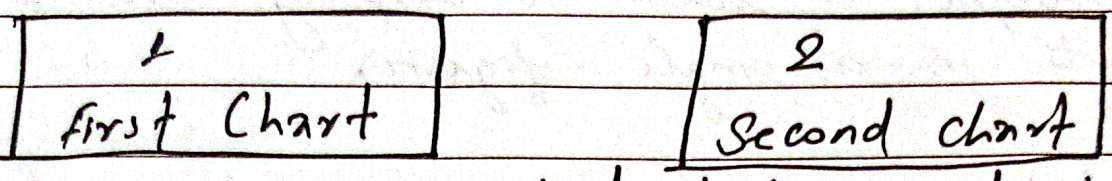

Two charts displayed side by side

2 Rows x 2 columns

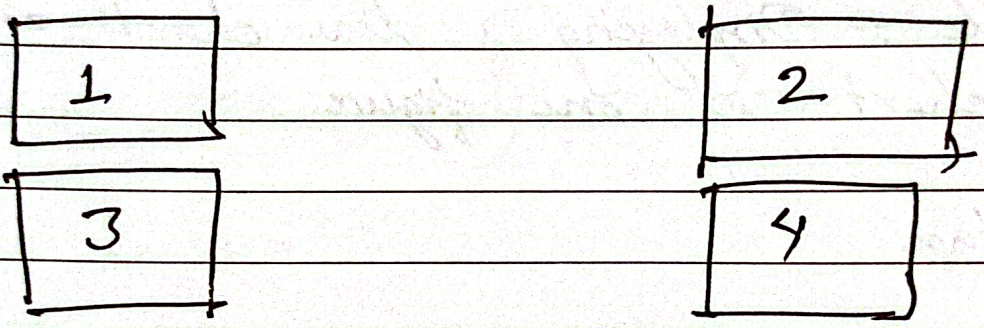

four charts arranged in two rows and two columns

5. plt.subplots()

plt.subplots() is another way to create multiple charts.

```
fig, ax = plt.subplots(1,2)
```

fig : Overall figure.
ax : Axes (individual chart areas)
1,2 : One row and two columns

bhipura

CamScanner

Date

6. Advantages of Subplot

1. Display multiple charts in one figure.
2. Compare different datasets easily.
3. Save space when showing graphs.
4. Useful for data analysis and reports.

Quick Revision

Term.	Meaning
Subplot	multiple chart in one frame
Rows	Horizontal Arrangement
Columns	Vertical arrangement
Positions	Chart location.
plt.subplot()	Create an individual subplot
plt.subplot()	Create a figure with multiple axes.

Things to Remember → plt.subplot(2,2,1) means

2 rows, 2 columns and 1 position 1.