aircargo | EMPLOYEE | window in

Limit to 1000 rows

```
1 •  use aircargo;
2 •  select * from passengers_on_flights;
3 •  select * from routes;
4 •  select * from ticket_details;
5 •  select * from customer;
6
7    -- routes 01 to 25 --
```

Result Grid | Filter Rows: | Export: | Wrap C

customer_id	first_name	last_name	date_of_birth	gender
1	Julie	Sam	12-01-1989	F
2	Steve	Ryan	03-04-1983	M
3	Morris	Lois	09-12-1993	M
4	Cathenna	Emily	14-09-1977	14-09-1977
5	Aaron	Kim	18-02-1991	M
6	Alexander	Scot	12-02-1985	M
7	Anderson	Stewart	11-01-1992	M
8	Floyd	Ted	21-02-1993	M

rs_on_flights 1 | routes 2 | ticket_details 3 | customer 4

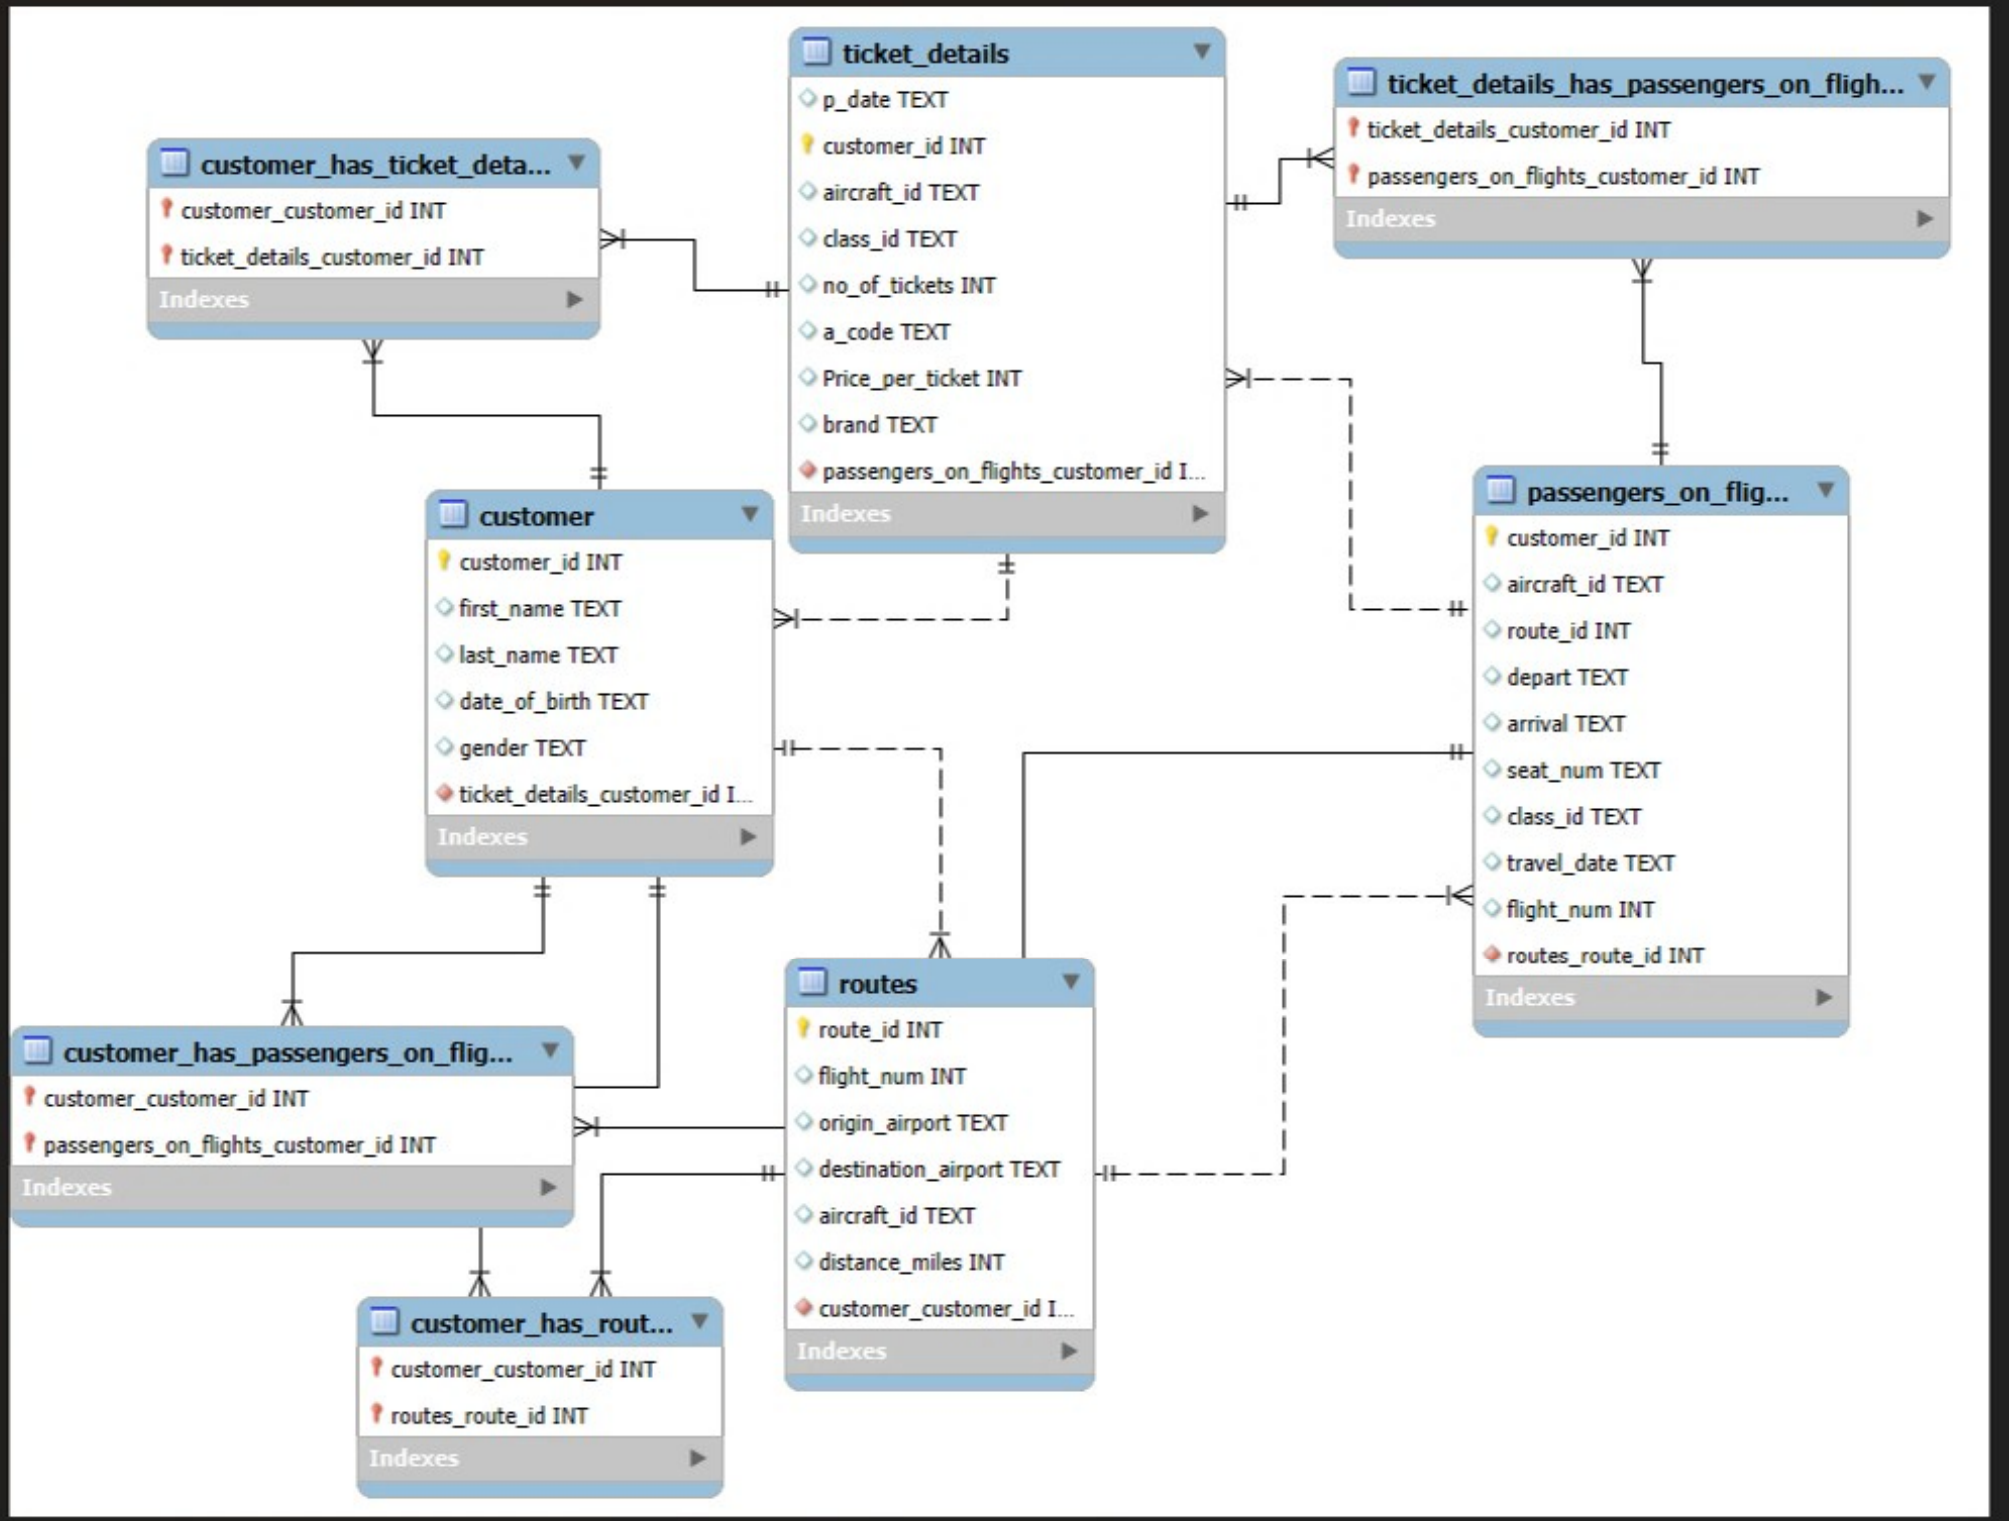
ticket_details
p_date TEXT
customer_id INT
aircraft_id TEXT
class_id TEXT
no_of_tickets INT
a_code TEXT
Price_per_ticket INT
brand TEXT
passengers_on_flights_customer_id I...
Indexes
ticket_details_has_passengers_on_fligh...
ticket_details_customer_id INT
passengers_on_flights_customer_id INT
Indexes
customer_has_ticket_deta...
customer_customer_id INT
ticket_details_customer_id INT
Indexes
customer
customer_id INT
first_name TEXT
last_name TEXT
date_of_birth TEXT
gender TEXT
ticket_details_customer_id I...
Indexes
passengers_on_flig...
customer_id INT
aircraft_id TEXT
route_id INT
depart TEXT
arrival TEXT
seat_num TEXT
class_id TEXT
travel_date TEXT
flight_num INT
routes_route_id INT
Indexes
routes
route_id INT
flight_num INT
origin_airport TEXT
destination_airport TEXT
aircraft_id TEXT
distance_miles INT
customer_customer_id I...
Indexes
customer_has_passengers_on_flig...
customer_customer_id INT
passengers_on_flights_customer_id INT
Indexes
customer_has_rout...
customer_customer_id INT
routes_route_id INT
Indexes

```sql
-- routes 01 to 25 --
SELECT *
FROM passengers_on_flights
WHERE route_id BETWEEN '01' AND '25';
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	aircraft_id	route_id	depart	arrival	seat_num	class_id	travel_date	flight_num
2	767-301ER	4	JFK	LAX	01E	Economy	02-09-2018	1114
1	ERJ142	9	DEN	LAX	01EP	Economy Plus	26-12-2019	1119
5	767-301ER	12	ABI	ADK	02B	Business	02-07-2018	1122
5	ERJ142	18	ANI	BGR	02E	Economy	06-05-2020	1128
4	767-301ER	5	LAX	JFX	02FC	First Class	06-04-2020	1115
7	767-301ER	20	AVL	BOI	03B	Business	08-07-2020	1130
5	ERJ142	22	BGR	BJI	03E	Economy	31-05-2020	1132
4	767-301ER	4	JFK	LAX	03FC	First Class	30-04-2020	1114
11	767-301ER	5	LAX	JFX	04B	Business	12-11-2020	1115
17	A321	13	ABI	ADK	04EP	Economy Plus	03-06-2019	1123
9	767-301ER	15	CAK	ANI	04FC	First Class	10-09-2020	1125
11	767-301ER	4	JFK	LAX	05B	Business	09-11-2020	1114
10	A321	10	HNL	DEN	05E	Economy	11-10-2020	1120
15	A321	14	BQN	CAK	06B	Business	02-11-2018	1124
13	A321	13	ADK	BQN	06FC	First Class	05-01-2019	1123

passengers_on_flights 5

```sql
-- passengers and total revenue in buisness class --
SELECT
  SUM(no_of_tickets) AS tatal_buisness_tickets,
  SUM(price_per_ticket * no_of_tickets) AS total_revenue_business
FROM ticket_details
WHERE class_id = 'Business';
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

tatal_buisness_tickets	total_revenue_business
13	6034

```
-- full name of the customer --
select concat(first_name,last_name) as full_name
from customer;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Con

full_name
JulieSam
SteveRyan
MorrisLois
CathennaEmily
AaronKim
AlexanderScot
AndersonStewart
FloydTed
LeoTravis
MelvinTracy
RogerWalson
ShirleyWally
SolomonWalter
CarolVernon
LindaWilliam

Result 10

```sql
-- customers who booked and register from customer and ticket details table -
SELECT DISTINCT c.customer_id
FROM customer AS c
inner JOIN ticket_details AS td
  ON c.customer_id = td.customer_id;
```

esult Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id
27
22
21
4
5
7

sult 17

tput

```
-- coustomer name from brand(emirates) --
select td.customer_id, td.brand, c.first_name, c.last_name
from ticket_details as td, customer as c
where td.customer_id = c.customer_id
having brand = "emirates";
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	brand	first_name	last_name
2	Emirates	Steve	Ryan
4	Emirates	Cathenna	Emily
4	Emirates	Cathenna	Emily
5	Emirates	Aaron	Kim
7	Emirates	Anderson	Stewart
9	Emirates	Leo	Travis
11	Emirates	Roger	Walson
11	Emirates	Roger	Walson
14	Emirates	Carol	Vernon
18	Emirates	Gloria	Richie
18	Emirates	Gloria	Richie
19	Emirates	Joyce	Paul
25	Emirates	Moss	Morris

Result 23

Output

```sql
-- identify the customers who have traveled by Economy Plus class using the sub-query on the passengers_on_flights table.--
SELECT *
FROM customer AS c
WHERE c.customer_id IN (
  SELECT p.customer_id
  FROM passengers_on_flights AS p
  WHERE p.class_id = 'Economy Plus'
);
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	first_name	last_name	date_of_birth	gender
1	Julie	Sam	12-01-1989	F
8	Floyd	Ted	21-02-1993	M
11	Roger	Walson	24-05-1996	M
17	Catherine	Shad	09-11-1988	F
19	Joyce	Paul	02-06-1990	F
22	Pheny	Eri	29-01-1999	M
32	Chirstoper	Sean	21-06-1993	M
47	Sophia	Carl	11-08-1999	F
50	Rose	Arthur	23-05-1996	F

customer 28

Output

```sql
-- revenue threshold 10000 --
SELECT
  SUM(no_of_tickets * price_per_ticket) AS total_revenue,
  IF(SUM(no_of_tickets * price_per_ticket) > 10000,
    'Yes, revenue crossed 10000',
    'No, revenue did not cross 10000') AS irevenue_threshold
FROM ticket_details;
```

sult Grid | Filter Rows: | Export: | Wrap Cell Content:

total_revenue	irevenue_threshold
15369	Yes, revenue crossed 10000

```sql
-- creating & granting access to new user --
CREATE USER 'new_user'@'localhost' IDENTIFIED BY 'Your$tr0ngP@ssw0rd';
GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP
  ON aircargo.*
  TO 'new_user'@'localhost';
FLUSH PRIVILEGES;
```

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	19:36:40	use aircargo	0 row(s) affected	0.000 sec
2	19:36:40	select * from passengers_on_flights LIMIT 0, 1000	50 row(s) returned	0.047 sec / 0.000 sec
3	19:36:40	select * from routes LIMIT 0, 1000	49 row(s) returned	0.031 sec / 0.000 sec
4	19:36:40	select * from ticket_details LIMIT 0, 1000	50 row(s) returned	0.016 sec / 0.000 sec
5	19:36:40	select * from customer LIMIT 0, 1000	50 row(s) returned	0.031 sec / 0.000 sec
6	19:59:10	CREATE USER 'new_user'@'localhost' IDENTIFIED BY 'Your$tr0ngP@ssw0rd'	0 row(s) affected	0.047 sec
7	19:59:10	GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP ON aircargo.* TO 'new_user'@'localhost'	0 row(s) affected	0.016 sec
8	19:59:10	FLUSH PRIVILEGES	0 row(s) affected	0.000 sec

```
52      -- creating & granting access to new user --
53 •    CREATE USER 'new_user'@'localhost' IDENTIFIED BY 'Your$tr0ngP@ssw0rd';
54 •    GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP
55        ON aircargo.*
56        TO 'new_user'@'localhost';
57 •    FLUSH PRIVILEGES;
58 •    SHOW GRANTS FOR 'new_user'@'localhost';
```

esult Grid | Filter Rows: | Export: | Wrap Cell Content:

	Grants for new_user@localhost
	GRANT USAGE ON *.* TO `new_user`@`localh...
	GRANT SELECT, INSERT, UPDATE, DELETE, CR...

```sql
-- maximum ticket price for each class --
select price_per_ticket, class_id,
max(price_per_ticket) over(partition by class_id) as max_price
from ticket_details;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

price_per_ticket	class_id	max_price
499	Business	510
430	Business	510
490	Business	510
490	Business	510
510	Business	510
430	Business	510
480	Business	510
430	Business	510

Result 9

Output

```sql
-- to extract the passengers whose route ID is 4 using index --
CREATE INDEX idx_route_id ON passengers_on_flights(route_id);
SELECT *
FROM passengers_on_flights
WHERE route_id = 4;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	aircraft_id	route_id	depart	arrival	seat_num	class_id	travel_date	flight_num
2	767-301ER	4	JFK	LAX	01E	Economy	02-09-2018	1114
4	767-301ER	4	JFK	LAX	03FC	First Class	30-04-2020	1114
11	767-301ER	4	JFK	LAX	05B	Business	09-11-2020	1114

```sql
-- query to view the execution plan for route id 4 --
EXPLAIN SELECT *
FROM passengers_on_flights
WHERE route_id = 4;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	select_type	table	partitions	type	possible_keys	key	key_len	ref	rows	filtered	Extra
1	SIMPLE	passengers_on_flights	NULL	ref	idx_route_id	idx_route_id	5	const	3	100.00	NULL

```sql
-- to calculate the total price of all tickets booked by a customer across different aircraft IDs using the rollup function--
SELECT
    customer_id,
    aircraft_id,
    SUM(price_per_ticket) AS total_price
FROM
    ticket_details
GROUP BY
    customer_id, aircraft_id WITH ROLLUP;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	aircraft_id	total_price
2	NULL	635
4	767-301ER	780
4	NULL	780
5	767-301ER	430
5	ERJ142	240
5	NULL	670
7	767-301ER	430
7	NULL	430
8	A321	465
8	NULL	465
9	767-301ER	380
9	CRJ900	390

Result 21

Result Grid | Form Editor | Field Types

Read Only

Output

Action Output

```sql
-- buisness class coustomers seprate view--
CREATE VIEW business_class_customers AS
SELECT
    customer_id,
    brand
FROM
    ticket_details
WHERE
    class_id = 'Business';
SELECT * FROM business_class_customers;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	brand
21	Bristish Airways
7	Emirates
11	Emirates
25	Emirates
24	Qatar Airways
29	Qatar Airways
2	Qatar Airways
29	Jet Airways
5	Emirates
15	Qatar Airways
33	Bristish Airways
49	Emirates

business_class_customers 25

```
-- create a stored procedure that extracts all the details from the routes table where the traveled distance is more than 2000 miles
DELIMITER //
CREATE PROCEDURE GetLongRoutes()
BEGIN
    SELECT *
    FROM routes
    WHERE distance_miles > 2000;
END //
DELIMITER ;
CALL GetLongRoutes();
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

route_id	flight_num	origin_airport	destination_airport	aircraft_id	distance_miles
1	1111	EWR	HNL	767-301ER	4962
2	1112	HNL	EWR	767-301ER	4962
3	1113	EWR	LHR	A321	3466
4	1114	JFK	LAX	767-301ER	2475
5	1115	LAX	JFK	767-301ER	2475
6	1116	HNL	LAX	767-301ER	2556
10	1120	HNL	DEN	A321	3365
12	1122	ABI	ADK	767-301ER	4300
13	1123	ADK	BQN	A321	2232
14	1124	BQN	CAK	A321	2445
18	1128	ANI	BGR	ERJ142	2450
19	1129	ATW	AVL	A321	2222

Result 26

```sql
-- Using GROUP BY, determine the total number of tickets purchased by each customer and the total price paid.--
SELECT
    customer_id,
    COUNT(*) AS total_tickets,
    SUM(price_per_ticket) AS total_amount_paid
FROM
    ticket_details
GROUP BY
    customer_id;
```

esult Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	total_tickets	total_amount_paid
27	1	130
22	1	220
21	1	490
4	2	780
5	3	670
7	1	430
8	2	465
9	2	770
10	1	135
11	3	1225
19	3	550
13	1	395

sult 27

tput

```sql
-- the average distance and average number of passengers per aircraft, considering only those routes with more than one departure date
SELECT r.aircraft_id,
AVG(r.distance_miles) AS avg_distance,
AVG(pf.passenger_count) AS avg_passengers
FROM (SELECT
    route_id,
    COUNT(DISTINCT travel_date) AS departure_count,
    COUNT(customer_id) AS passenger_count
FROM
    passengers_on_flights
GROUP BY
    route_id
HAVING
    COUNT(DISTINCT travel_date) > 1) pf
JOIN routes r ON pf.route_id = r.route_id
GROUP BY r.aircraft_id;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

aircraft_id	avg_distance	avg_passengers
767-301ER	3750.4000	2.4000
ERJ142	1221.2500	2.0000
A321	2060.0000	2.0000
CRJ900	1234.6667	2.0000

Result Grid